

Single Phase Glass Passivated Silicon Bridge Rectifier

$V_{RRM} = 600 \text{ V -} 1000 \text{ V}$
 $I_O = 8 \text{ A}$

Features


- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- High case dielectric strength of 1500 V_{RMS}
- Glass passivated chip junction
- Ideal for printed circuit boards
- High surge overload rating
- High temperature soldering guaranteed: 260°C/ 10 seconds, 0.375 (9.5mm) lead length
- Not ESD Sensitive

Mechanical Data

Case: Molded plastic body over passivated junctions

Terminals: Plated leads, solderable per MIL-STD-750 Method 2026.

Mounting position: Any

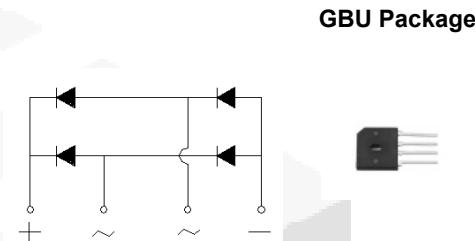

Maximum ratings at $T_c = 25 \text{ }^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Conditions	GBU8J	GBU8K	GBU8M	Unit
Repetitive peak reverse voltage	V_{RRM}		600	800	1000	V
RMS reverse voltage	V_{RMS}		420	560	700	V
DC blocking voltage	V_{DC}		600	800	1000	V
Operating temperature	T_j		-55 to 150	-55 to 150	-55 to 150	°C
Storage temperature	T_{stg}		-55 to 150	-55 to 150	-55 to 150	°C

Electrical characteristics at $T_c = 25 \text{ }^\circ\text{C}$, unless otherwise specified

Single phase, half sine wave, 60 Hz, resistive or inductive load.







For capacitive load derate current by 20%.

Parameter	Symbol	Conditions	GBU8J	GBU8K	GBU8M	Unit
Maximum average forward rectified current ^{1,2}	I_O	$T_c = 100 \text{ }^\circ\text{C}$	8.0	8.0	8.0	A
Peak forward surge current	I_{FSM}	$t_p = 8.3 \text{ ms, half sine}$	200	200	200	A
Maximum instantaneous forward voltage drop per leg	V_F	$I_F = 8 \text{ A}$	1.1	1.1	1.1	V
Maximum DC reverse current at rated DC blocking voltage per leg	I_R	$T_a = 25 \text{ }^\circ\text{C}$ $T_a = 125 \text{ }^\circ\text{C}$	5 500	5 500	5 500	μA
Rating for fusing	I^2t	$t < 8.3 \text{ ms}$	166	166	166	A^2sec
Typical junction capacitance per leg ³	C_j		94	94	94	pF
Typical thermal resistance per leg ^{1,2}	R_{QJA} R_{QJL}		21 2.2	21 2.2	21 2.2	°C/W

¹ - Device mounted on 82 mm x 82 mm x 3 mm Al plate heatsink

² - Recommended mounted position is to bolt down device on a heatsink with silicon thermal compound for maximum heat transfer using #6 screw.

³ - Measured at 1.0 MHz and applied reverse bias of 4.0 V

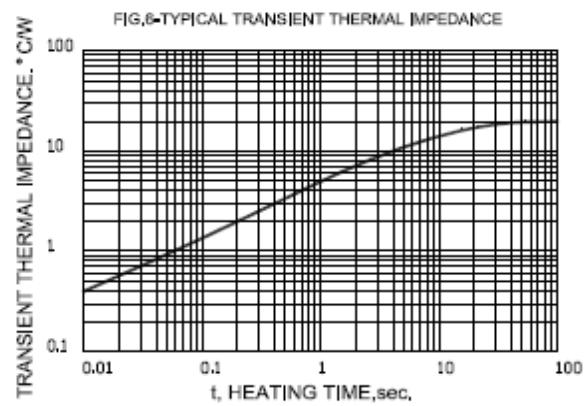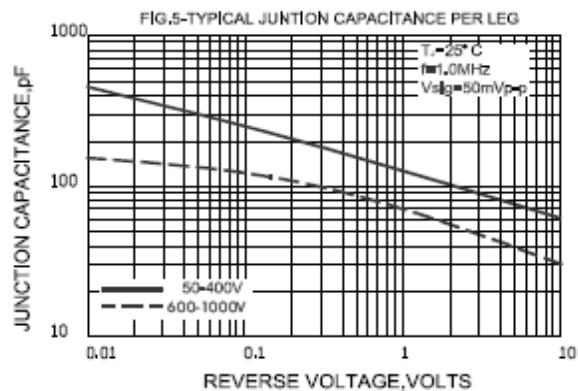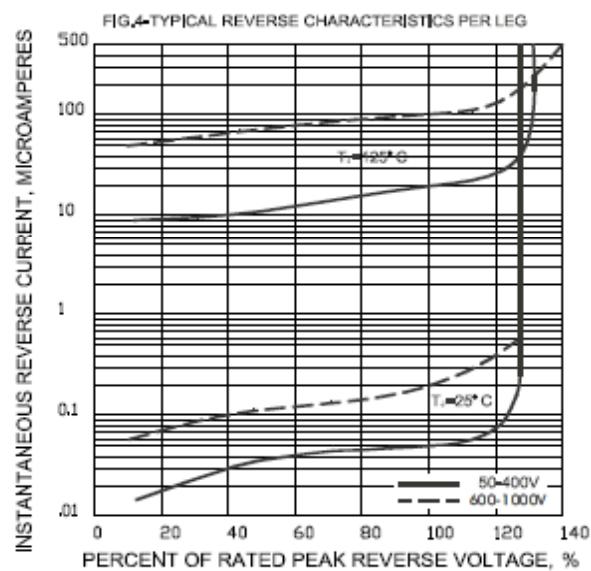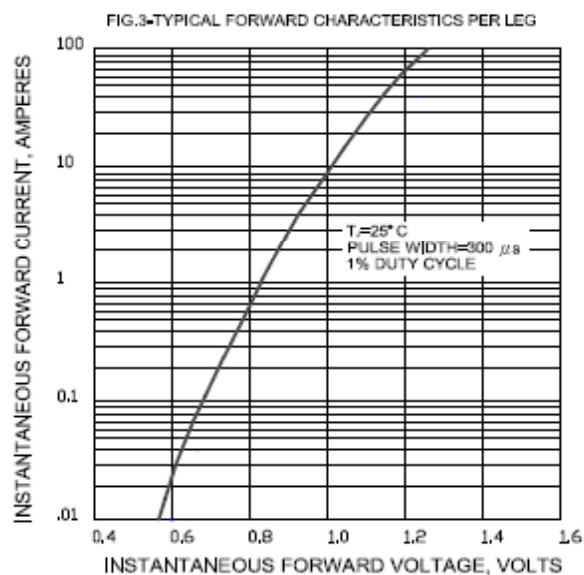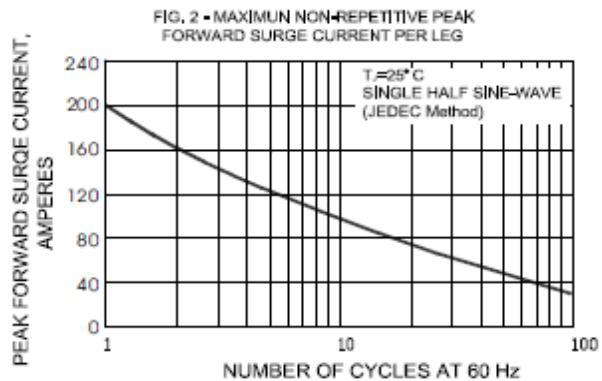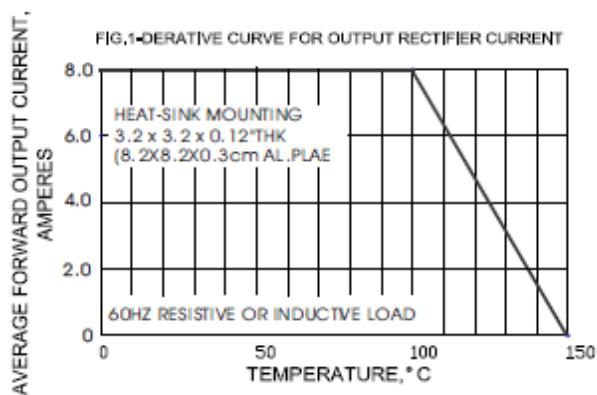

Package dimensions and terminal configuration

Product is marked with part number and terminal configuration.

