

DASH NO.	M CODE	MADE FROM
----------	--------	-----------


REVISIONS	
ISSUE	CHANGES
5	52 334/5 E JCA 10/8/91

KA-99-79

GSD

GSD

SCALE:	USED ON:	REF:
TNC-TNC BULKHD. ADPT. (ISOLATED GROUND)		
DRAWN FAS	DATE 27 OCT 80	
APPR. MJB	DATE 29 OCT 80	
EIKINGS ELECTRONICS CO., INC. 10000 WYOMING		
KA-99-79		

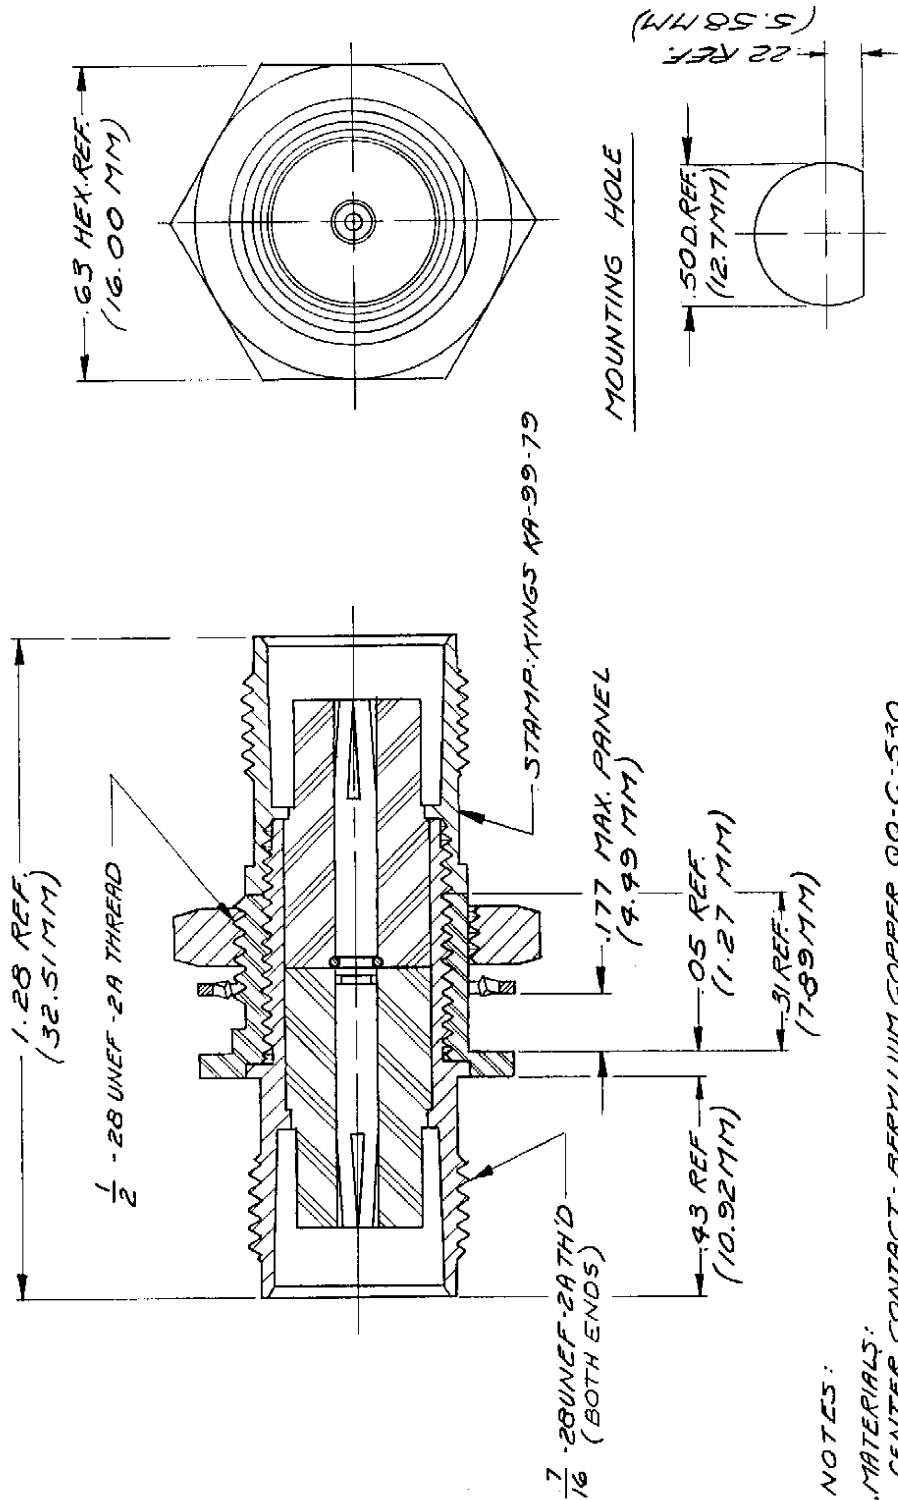

NOTES:

1. MATERIALS:
CENTER CONTACT - BERYLLIUM COPPER QQ-C-530
C-RING - COPPER WIRE, HARD DRAWN QQ-W-360
LOCK WASHER - PHOSPHOR BRONZE QQ-P-330
ALL OTHER METAL PARTS - BRASS QQ-B-626
INSULATORS - TEFLON, 1. P-903
INSULATING BODY - DELRIN 150

2. FINISHES:
CENTER CONTACT } SILVER PLATE .0002
C-RING } MIN. PER QQ-S-365
ALL OTHER METAL PARTS } SILVER PLATE
} .0001 MIN. PER QQ-S-365
3. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE - 50Ω
FREQUENCY RANGE - DC TO 11 GHz
VOLTAGE RATING - 500 VOLTS RMS

- UNLESS OTHERWISE SPECIFIED:
1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS ± .010
3 PLACE DECIMALS ± .004 ANGLES ± 0°30'
T. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY
NOT EXCEED HALF THE SUM OF THEIR TOLERANCES
2. REMOVE ALL BURRS, BREAK SHARP EDGES .005 MAX.
3. NO FILLETS PERMITTED
4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
5. ALL DIMENSIONS PRIOR TO PLATING
6. ALL PLATING IN ACCORDANCE WITH KER 10004

GSD