


Product Line

- DeepTronica >
- Single Pair Ethernet >
- ZConnect >
- Ceres >
- X-Lok >
- M Series >
- FLOS & FLOS+ >
- Power >
- RBL >
- HS-Lok >
- NMEA 2000 >
- Heavy Duty Shielded >
- RJ >
- USB >
- SSL >
- HDMI >
- DVI >
- Fiber Optic >
- RF >
- Cable Joiner >
- Cable Gland >
- Pressure Relief Vent >
- LED Light Guide >
- D-Sub >
- Standard
- High Density
- Accessory
- ALTW Emporium >

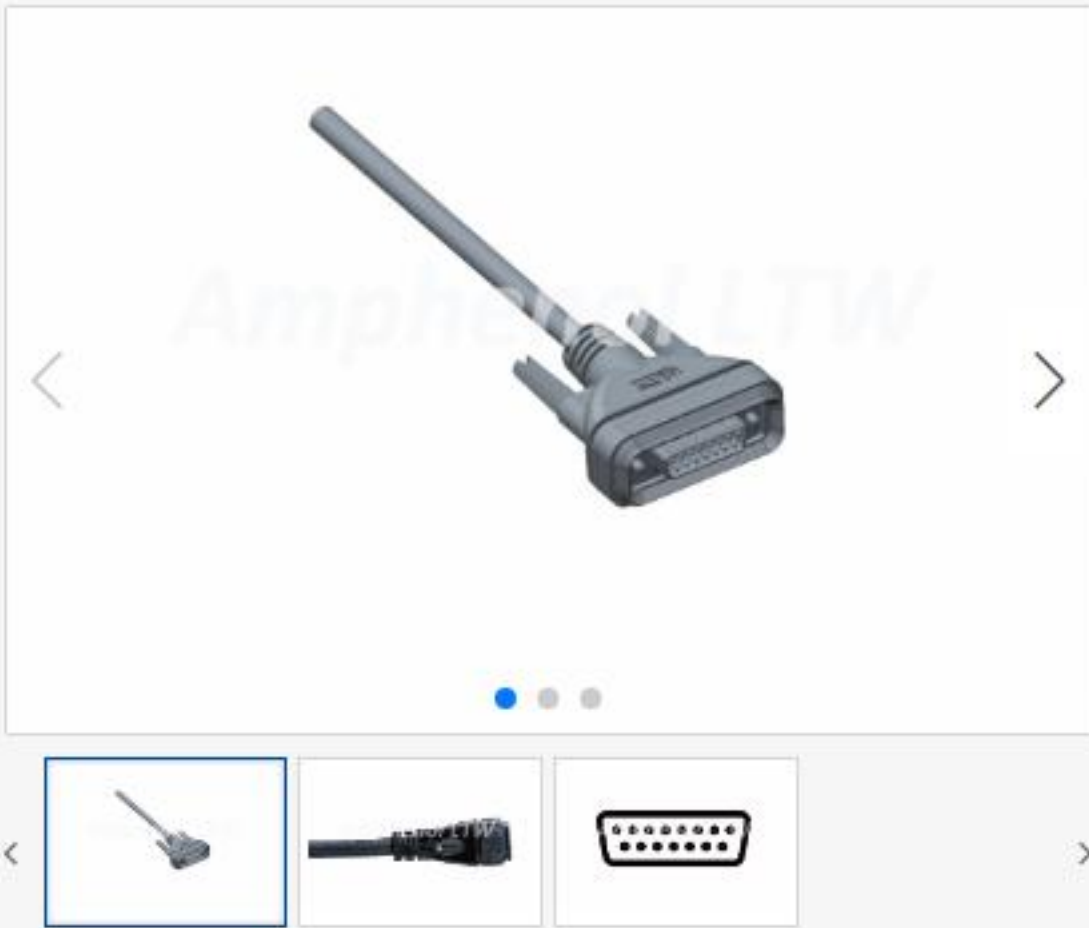

SDB-15AMMM-SL7A02

- Operating Temperature: -20°C ~ +80°C
- Transmission Speed: N/A
- Shielded: Metal, Shielded
- Jacket Material: PVC
- Certificate: N/A

You must login first for view the price

Quantity - 1 +

Add to Cart

Inquiry

Can't find? [Customize your part](#)

Mating Pair & Accessories

Connector Type

Search

D-Sub, Accessory...
CAP-DD2MDMA1
-40°C ~ +105°C

- 0 +

D-Sub, Accessory...
DJ2-00JNNA-...
N/A

- 0 +

D-Sub, Standard...
SDB-15PFFP-...
-40°C ~ +105°C

- 0 +

D-Sub, Standard...
SDB-15PFFP-...
-40°C ~ +105°C

- 0 +

D-Sub, Standard...
SDB-15PFFP-...
-40°C ~ +105°C

- 0 +

D-Sub, Standard...
SDB-15PFFP-...
-40°C ~ +105°C

- 0 +

Add to Cart

Inquiry

Specifications		Download / CAD	
Nominal Current		Connector Type	
5A		Overmolded	
Shielded		No. of Contacts	
Metal, Shielded		15	
Connector Gender		Backshell	
Male		Straight	
Mating Style		IP Rating	
Screw Thread		IP67	
Assembly Style			
N/A			
More Options			

People Also Bought

SDB-15AMMM-...

M12A03FL-12AMR-...

AB-CC03BL-CCBR-...

CB-03RFMC-RC7A30

PS-050500-MF0-...

ABOUT AMPHENOL LTW

SUPPORT

PARTNERS

DOWNLOAD CENTER

FEEDBACK

Downloaded from [Arrow.com](#)