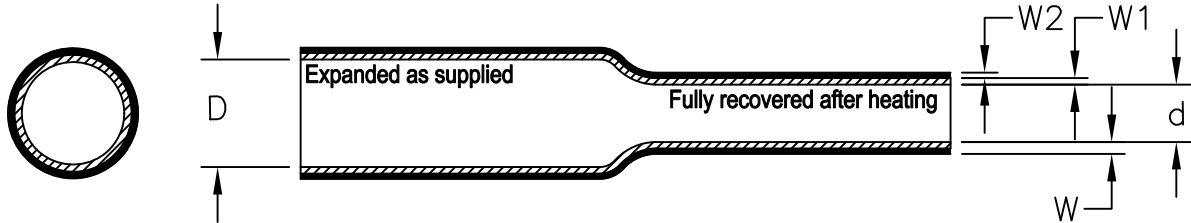


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	See ECO-19-002621	2/19/19	J.B	T.L

ES2000
Flame - Retardant, Adhesive - Lined
Heat - Shrinkable Tubing

**Table 1: Dimensions mm (inches)**

Size	As Supplied		As Recovered							
	Minimum Expanded I.D. Including Core (D)		Maximum Recovered I.D. Including Core (d)		Minimum Recovered Total Wall (W)		Minimum Recovered Adhesive Wall (W1)		Minimum Recovered Jacket Wall (W2)	
	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.
No.0	4.57	0.180	1.02	0.040	0.86	0.034	0.38	0.015	0.48	0.019
No.1	5.72	0.225	1.27	0.050	1.20	0.047	0.56	0.022	0.64	0.025
No.2	7.44	0.293	1.65	0.065	1.52	0.060	0.76	0.030	0.76	0.030
No.3	10.85	0.427	2.41	0.095	1.91	0.075	1.02	0.040	0.89	0.035
No.4	17.78	0.700	4.45	0.175	2.41	0.095	1.37	0.054	1.04	0.041
No.11	9.02	0.355	2.29	0.090	1.78	0.070	0.94	0.037	0.84	0.033

Color: Jacket shall be black; adhesive liner shall be amber.

Reference Specification 108-120024

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.

© COPYRIGHT 2019 TE Connectivity

DIMENSIONS: INCHES		DWN J. Bitter	09AUG2017	MATERIAL -		FINISH -	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		CHK T. Licko	-				
		APVD T. Licko	-				
		PRODUCT SPEC		NAME		ES2000 Flame - Retardant, Adhesive - Lined Heat - Shrinkable Tubing	
		APPLICATION SPEC		SIZE		CAGE CODE	DRAWING NO
WEIGHT		0		A4	00779	ES2000	-
CUSTOMER DRAWING				SCALE	None	SHEET	1 OF 1
				REV	A		