

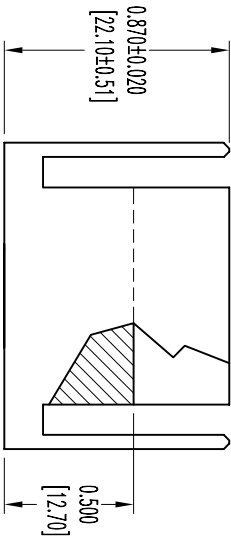


POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE. THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION. POSITRONIC INDUSTRIES ASSUMES NO LIABILITY OR RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

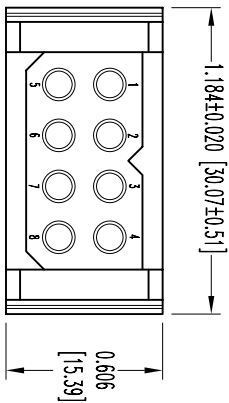

DATE	REV	REVISION RECORD	APP	DR	CK
1-22-99	NC	ECO 14078	TK	JLG	COLF
13-20-04	A	ECO 23435		YK	

SK3085

- NOTES:
1. MATERIALS AND FINISHES:
INSULATOR: GLASS-FILLED POLYESTER, UL 94V-0, BLUE COLOR.
 2. ELECTRICAL CHARACTERISTICS:
INSULATION RESISTANCE: 5 G OHMS PER IEC 512-2, TEST 3d, METHOD A.
WORKING VOLTAGE: 600 VAC.
 3. WORKING TEMPERATURE: -55°C TO +125°C.
 4. DIMENSIONS ARE IN INCHES [MILLIMETERS].



POSITRONIC INDUSTRIES INC.
www.connectpositronic.com

DECIMAL TOL.	PCS SERIES	SCALE	DRAWN BY	DATE	DRAWING NUMBER	REV.
± 0.015 [0.38]		N.T.S.	J. GREEN	1-22-99	SK3085	A
			APPROVED BY T. KEPLER			