


REV.	DATE	DESCRIPTION
NC	06/12/02	INITIAL RELEASE

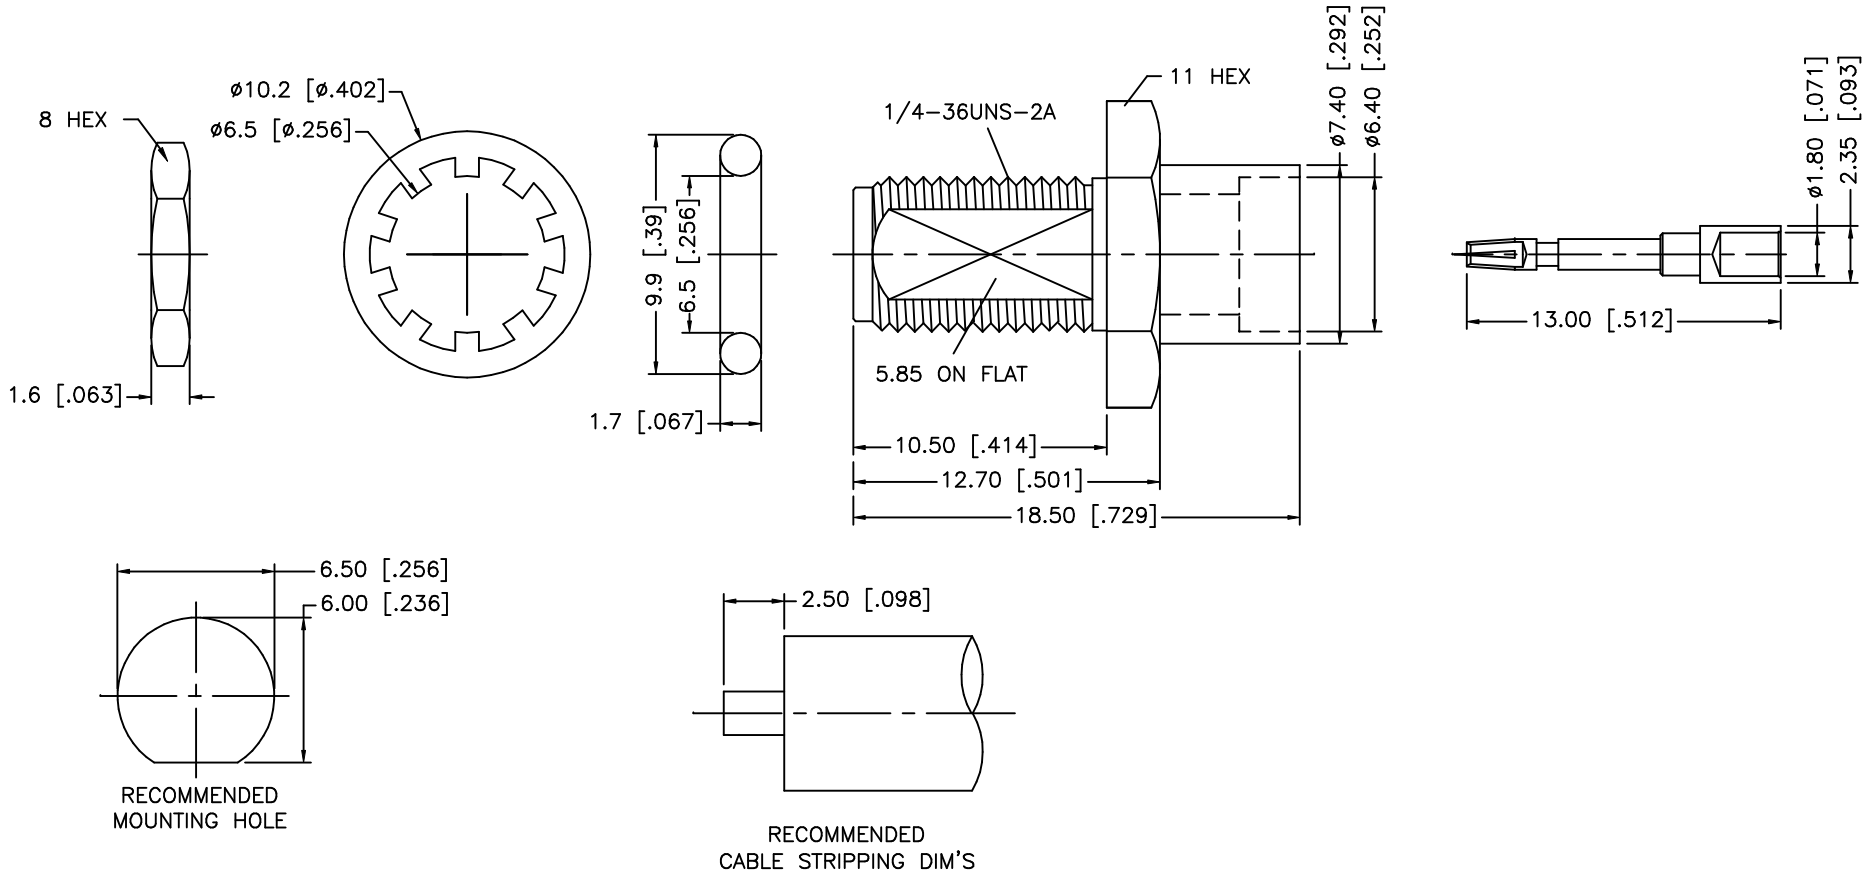

- CRIMP NOTES:
1. SOLDER CENTER CONTACT
 2. MAX. PANEL THICKNESS = 2.4mm

8				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	APPROVALS	DATE	Amphenol - Connex CONNECTOR CORPORATION TITLE SMA DIRECT SOLDER BULKHEAD JACK (.250 SEMI RIGID CABLE)			
7					DRAWN G.R.S.	06/12/02				
6	HEX NUT	BRASS	GOLD		CHECKED					
5	LOCK WASHER	BRASS	GOLD		ISSUED					
4	GASKET	RUBBER	RED	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .XXX = $\pm 0.005"$.XX = $\pm 0.010"$.X = $\pm 0.020"$			SIZE A	FSCM NO. 99001	DWG. NO. 132346.DWG	REV. NC
3	CONTACT PIN	BER. COPPER	GOLD							
2	INSULATOR	TEFLON	NATURAL							
1	BODY	BRASS	GOLD							
DESCRIPTION MATERIAL FINISH				DO NOT SCALE DRAWING			SCALE NA	PART NO. 132346	SHEET 1 OF 1	