


SMF



200 W Transient voltage suppressor



Product features

- Low profile SOD-123FL package
- Excellent clamping capability
- 200 W peak pulse power capability at 10/1000 μ s waveform
- Typical I_R less than 1 μ A above 10 V
- Fast response time: typically less than 1.0 ps from 0 V to V_{BR} minimum
- High temperature reflow soldering: +260 °C /40 s at terminal
- Plastic package meets UL 94 V-0 flammability rating
- Meets moisture sensitivity level (MSL) level 1
- Terminal: Tin plated leads, solderable per J-STD-002
- For surface mounted applications in order to optimize board space

PIN configuration



Applications

- Consumer electronics
- Telecommunications
- Computing and servers
- Appliances
- Industrial automation
- Mobile and wearables

Environmental compliance and general specifications



Ordering part number

Family name SMF 5.0 C A
 V_R voltage _____
 Bi-/Uni-Directional _____
 (Blank=Uni, C=Bi)
 Voltage tolerance _____

Alternate ordering part number

Family name SMFE 5-0 C A
 V_R voltage _____
 ("-" indicates decimal point)
 Bi-/Uni-Directional _____
 (Blank=Uni, C=Bi)
 Voltage tolerance _____




Powering Business Worldwide

Absolute maximum ratings

(+25 °C, RH=45%-75%, unless otherwise noted)

Parameter	Symbol	Value	Unit
Storage operating junction temperature range	T_{STG}/T_J	-55 to +150	°C
Peak pulse power dissipation on 10/1000 μ s waveform	P_{PP}	200	W
Maximum instantaneous forward voltage at 20 A for unidirectional	V_F	3.5	V
Typical thermal resistance junction to lead	$R_{\theta JL}$	100	°C/W
Typical thermal resistance junction to ambient	$R_{\theta JA}$	220	°C/W

Mechanical parameters, pad layout- mm

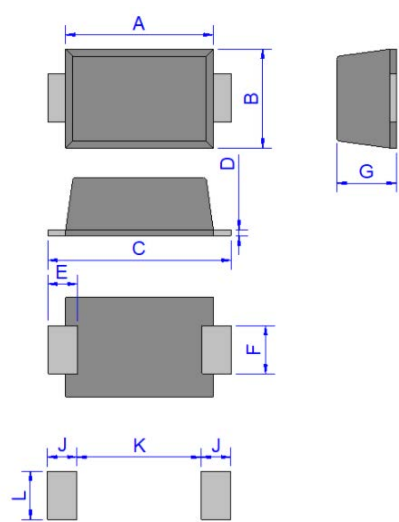

Dimension	Millimeters		Inches	
	Minimum	Maximum	Minimum	Maximum
A	2.60	3.00	0.102	0.118
B	1.60	2.00	0.063	0.079
C	3.45	3.95	0.136	0.156
D	0.10	0.25	0.004	0.01
E	0.3	0.9	0.012	0.035
F	0.80	1.20	0.031	0.047
G	0.70	1.00	0.0275	0.0393
J	1.30		0.051	
K		1.70		0.067
L	1.30		0.051	

Part marking




Cathode band (uni-polar only)
Part marking: xx = Refer to marking designator listed in Electrical Characteristics table

Packaging information (mm)

Drawing not to scale.

Supplied in tape and reel packaging, 3,000 parts per 7" diameter reel (EIA-481 compliant)

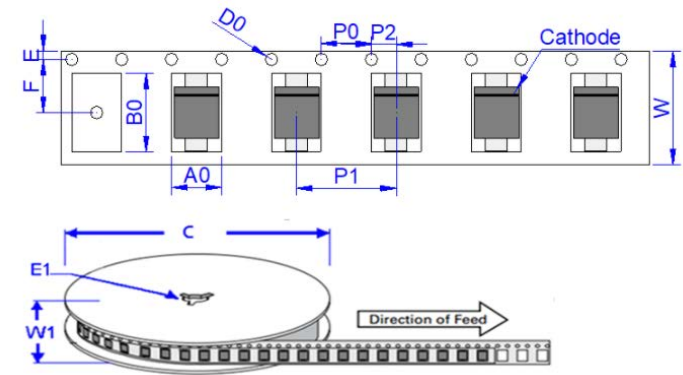

Dimension	Millimeters	Inches
A0	1.95 ± 0.3	0.077 ± 0.012
B0	3.95 ± 0.3	0.156 ± 0.012
C	178	7.0
D0	1.55 ± 0.1	0.061 ± 0.004
E	1.75 ± 0.2	0.069 ± 0.008
E1	13.3 ± 0.3	0.524 ± 0.012
F	3.50 ± 0.2	0.138 ± 0.008
P0	4.00 ± 0.2	0.157 ± 0.008
P1	4.00 ± 0.2	0.157 ± 0.008
P2	2.00 ± 0.2	0.079 ± 0.008
W	8.0 ± 0.2	0.315 ± 0.008
W1	11.5 ± 1.0	0.453 ± 0.039

SMF

200 W Transient voltage suppressor

Technical Data 11218
Effective September 2024


Electrical characteristics (+25 °C)

Part number		Marking		V_R	$I_R @ V_R$	$V_{BR} @ I_T$		I_T	$V_C @ I_{PP}$	I_{PP}
Uni-polar	Bi-polar	Uni	Bi	(V)	(μA)	min (V)	max (V)	(mA)	max (V)	(A)
SMF5.0A	SMF5.0CA	KE	5C	5	100	6.4	7	10	9.2	21.7
SMF6.0A	SMF6.0CA	KG	6C	6	100	6.67	7.37	10	10.3	19.4
SMF6.5A	SMF6.5CA	KK	6VC	6.5	30	7.22	7.98	10	11.2	17.9
SMF7.0A	SMF7.0CA	KM	7C	7	10	7.78	8.6	10	12	16.7
SMF7.5A	SMF7.5CA	KP	7VC	7.5	5	8.33	9.21	1	12.9	15.5
SMF8.0A	SMF8.0CA	KR	8C	8	2	8.89	9.83	1	13.6	14.7
SMF8.5A	SMF8.5CA	KT	8VC	8.5	2	9.44	10.4	1	14.4	13.8
SMF9.0A	SMF9.0CA	KV	9C	9	2	10	11.1	1	15.4	13
SMF10A	SMF10CA	KX	10C	10	1	11.1	12.3	1	17	11.8
SMF11A	SMF11CA	KZ	11C	11	1	12.2	13.5	1	18.2	11
SMF12A	SMF12CA	LE	12C	12	1	13.3	14.7	1	19.9	10.1
SMF13A	SMF13CA	LG	13C	13	1	14.4	15.9	1	21.5	9.3
SMF14A	SMF14CA	LK	14C	14	1	15.6	17.2	1	23.2	8.6
SMF15A	SMF15CA	LM	15C	15	1	16.7	18.5	1	24.4	8.2
SMF16A	SMF16CA	LP	16C	16	1	17.8	19.7	1	26	7.7
SMF17A	SMF17CA	LR	17C	17	1	18.9	20.9	1	27.6	7.2
SMF18A	SMF18CA	LT	18C	18	1	20	22.1	1	29.2	6.8
SMF20A	SMF20CA	LV	20C	20	1	22.2	24.5	1	32.4	6.2
SMF22A	SMF22CA	LX	22C	22	1	24.4	26.9	1	35.5	5.6
SMF24A	SMF24CA	LZ	24C	24	1	26.7	29.5	1	38.9	5.1
SMF26A	SMF26CA	ME	26C	26	1	28.9	31.9	1	42.1	4.8
SMF28A	SMF28CA	MG	28C	28	1	31.1	34.4	1	45.4	4.4
SMF30A	SMF30CA	MK	30C	30	1	33.3	36.8	1	48.4	4.1
SMF33A	SMF33CA	MM	33C	33	1	36.7	40.6	1	53.3	3.8
SMF36A	SMF36CA	MP	36C	36	1	40	44.2	1	58.1	3.4
SMF40A	SMF40CA	MR	40C	40	1	44.4	49.1	1	64.5	3.1
SMF43A	SMF43CA	MT	43C	43	1	47.8	52.8	1	69.4	2.8
SMF45A	SMF45CA	MV	45C	45	1	50	55.3	1	72.7	2.7
SMF48A	SMF48CA	MX	48C	48	1	53.3	58.9	1	77.4	2.6
SMF51A	SMF51CA	MZ	51C	51	1	56.7	62.7	1	82.4	2.4
SMF54A	SMF54CA	NE	54C	54	1	60	66.3	1	87.1	2.3
SMF58A	SMF58CA	NG	58C	58	1	64.4	71.2	1	93.6	2.1
SMF60A	SMF60CA	NK	60C	60	1	66.7	73.7	1	96.8	2
SMF64A	SMF64CA	NM	64C	64	1	71.1	78.6	1	103	1.9
SMF70A	SMF70CA	NP	70C	70	1	77.8	86	1	113	1.8
SMF75A	SMF75CA	NR	75C	75	1	83.3	92.1	1	121	1.7
SMF78A	SMF78CA	NV	78C	78	1	86.7	95.8	1	126	1.6
SMF85A	SMF85CA	NX	85C	85	1	94.4	104	1	137	1.5
SMF90A	SMF90CA	NZ	90C	90	1	100	111	1	146	1.4
SMF100A	SMF100CA	PE	100C	100	1	111	123	1	162	1.2
SMF110A	SMF110CA	PG	110C	110	1	122	135	1	177	1.1
SMF120A	SMF120CA	PK	120C	120	1	133	147	1	193	1
SMF130A	SMF130CA	PM	130C	130	1	144	159	1	209	0.9
SMF150A	SMF150CA	PR	150C	150	1	167	185	1	243	0.8
SMF160A	SMF160CA	PV	160C	160	1	178	197	1	259	0.8
SMF170A	SMF170CA	PX	170C	170	1	189	209	1	275	0.7
SMF180A	SMF180CA	PZ	180C	180	1	201	222	1	292	0.7
SMF200A	SMF200CA	QE	200C	200	1	224	247	1	324	0.6
SMF220A	SMF220CA	QR	220C	220	1	246	272	1	356	0.5


Note: Standard part numbers listed
Alternate part numbers have the
addition of an E and a "-" for the "."
where applicable. Example standard
part number SMF5.0A, Alternate part
number SMFE5-0A

Ratings and V-I characteristic curves (+25 °C unless otherwise noted)

V- I curve characteristics (Uni-directional)

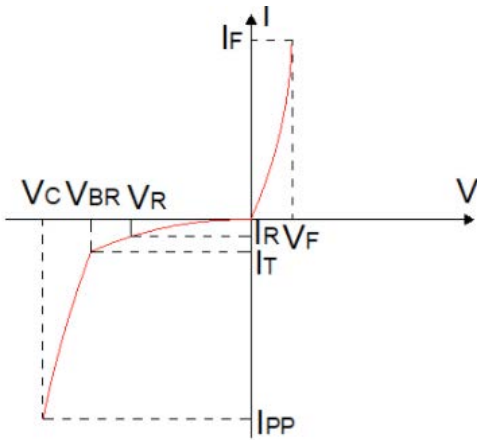

V- I curve characteristics (Bi-directional)

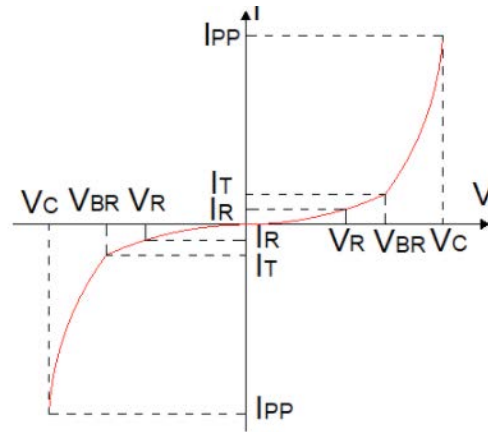

Surge waveform: 10/1000 μ s

V_R : Stand-off voltage – Maximum voltage that can be applied

V_{BR} : Breakdown voltage


V_C : Clamping voltage – Peak voltage measured across the suppressor at a specified I_{PP}

I_R : Reverse leakage current


I_T : Test current

V_F : Forward voltage drop for Uni-directional TVS diode

Pulse waveform

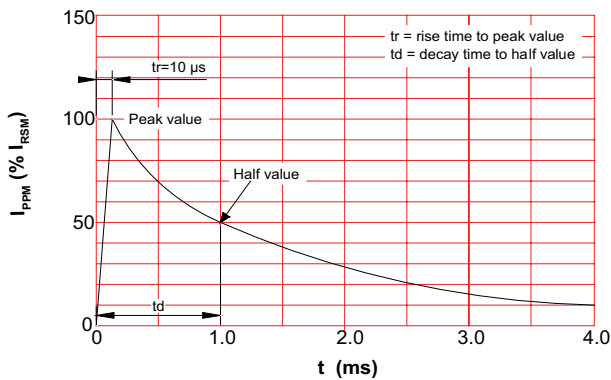

Pulse derating curve

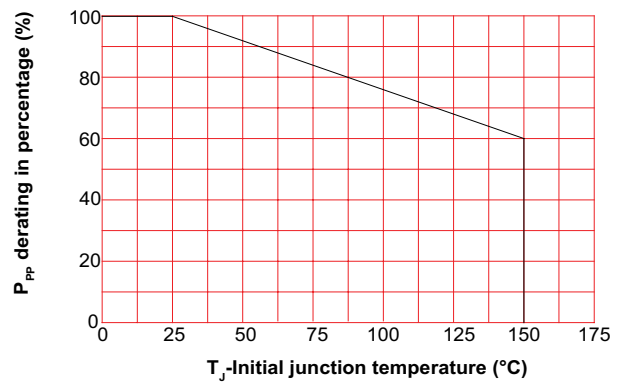

Solder reflow profile

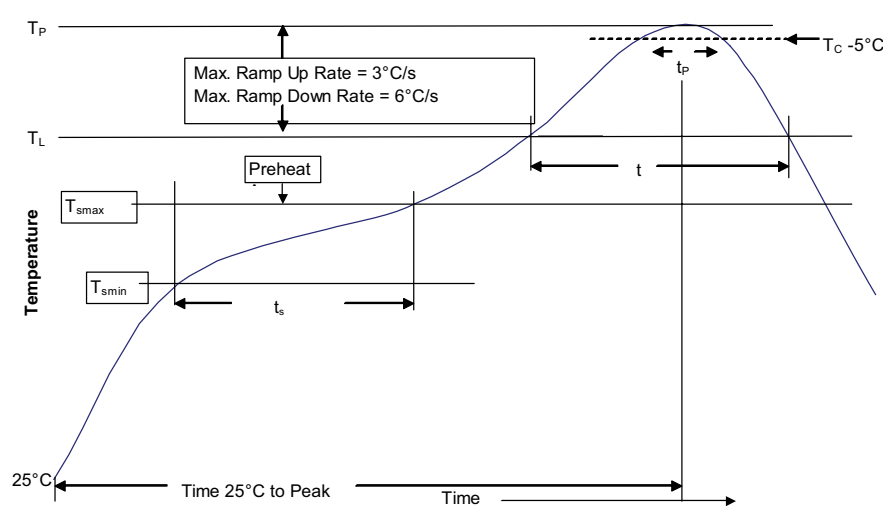


Table 1 - Standard SnPb solder (T_C)

Package thickness	Volume mm ³ <350	Volume mm ³ ≥350
<2.5 mm	235 °C	220 °C
≥2.5 mm	220 °C	220 °C

Table 2 - Lead (Pb) free solder (T_C)

Package thickness	Volume mm ³ <350	Volume mm ³ 350 - 2000	Volume mm ³ >2000
<1.6 mm	260 °C	260 °C	260 °C
1.6 – 2.5 mm	260 °C	250 °C	245 °C
>2.5 mm	250 °C	245 °C	245 °C

Reference J-STD-020

Profile feature	Standard SnPb solder	Lead (Pb) free solder
Preheat and soak		
• Temperature min. (T_{smin})	100 °C	150 °C
• Temperature max. (T_{smax})	150 °C	200 °C
• Time (T_{smin} to T_{smax}) (t_s)	60-120 seconds	60-180 seconds
Ramp up rate T_L to T_p	3 °C/ second max.	3 °C/ second max.
Liquidous temperature (T_L)	183 °C	217 °C
Time (t_L) maintained above T_L	60-150 seconds	60-150 seconds
Peak package body temperature (T_p)*	Table 1	Table 2
Time (t_p)* within 5 °C of the specified classification temperature (T_C)	20 seconds*	40 seconds*
Ramp-down rate (T_p to T_L)	6 °C/ second max.	6 °C/ second max.
Time 25 °C to peak temperature	6 minutes max.	8 minutes max.

* Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com/electronics

© 2024 Eaton
All Rights Reserved
Printed in USA
Publication No. 11218
September 2024

Eaton is a registered trademark.

All other trademarks are property
of their respective owners.

Follow us on social media to get the
latest product and support information.

