


# SuperChassis 942S-600 / 942S-600B

[Products](#) ▶ [Chassis](#) ▶ [4U](#) ▶ [ [SC942S-600](#) / [SC942S-600B](#) ]

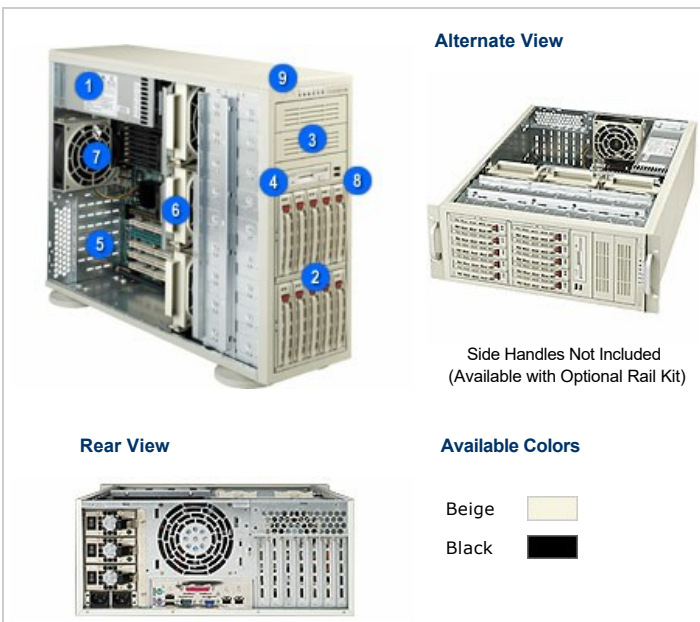

## Key Features

1. Triple Redundant 600W Power Supply
2. 10 x 3.5" SCA Ultra320/160 SCSI Hot-swappable Drive Bays
3. 2 x 5.25" Peripheral Drive Bays
4. 1 x 5.25" Drive Bay For 3.5" 1.44MB Floppy Drive
5. 7x Full-height, Full-length expansion slot
6. 3 x 120mm Hot-swappable Fans
7. 1 x 120mm Rear-exhaust Fan
8. 2 x Front USB Ports (optional)
9. Power Switch & 5 LED Indicators

## Links & Resources

- ▶ [Recommended Boards](#)
- ▶ [Chassis Manual](#)

Note: Image above may show a varied configuration or optional parts. Please refer to parts list for standard parts included.

## Specifications

Product SKUs	
<b>CSE-942S-600</b>	■ SuperChassis 942S-600 (Beige)
<b>CSE-942S-600B</b>	■ SuperChassis 942S-600B (Black)
Form Factor	
4U chassis support for max. motherboard size - 12" x 13" E-ATX	
Processor Support	
Dual Xeon® Processors	
Dimensions	
<b>Height</b>	17.8" (452mm)
<b>Width</b>	7.0" (178mm)
<b>Depth</b>	23.8" (605mm)
<b>Gross Weight</b>	69 lbs (31.4kg)
<b>Available Colors</b>	Beige, Black
Expansion Slots	
7x Full-height, Full-length expansion slots	
Drive Bays	
<b>Hot-swap</b>	• 10x 3.5" SCA Ultra320/160 Hot-swap Drives • 2x M35S Mobile Racks
<b>Peripheral Bay(s)</b>	• 2x 5.25" Peripheral Drive Bay • 1x 5.25" Bay For Floppy Drive
SCSI Backplane	
2x SCAM942 Ultra320/160 Backplanes in 2 Mobile Racks (with SAF-TE)	
Front Panel	
<b>Buttons</b>	• Power On/Off button • System Reset button
<b>LEDs</b>	• Power LED • Hard drive activity LED • 2x Network activity LEDs • System Overheat LED • Power Fail LED
<b>Ports</b>	2x USB Ports (optional)

System Cooling	
<b>Fans</b>	• 3x 120mm Hot-swappable Fans • 1x 120mm Rear Exhaust Fan
System Monitoring	
Chassis intrusion switch	
Operating Environment (System)	
<b>Operating Temperature Range</b>	■ 5°C ~ 35°C (41°F ~ 95°F)
<b>Non-Operating Temperature Range</b>	■ -40°C ~ 60°C (-40°F ~ 140°F)
<b>Operating Relative Humidity Range</b>	■ 8% ~ 90% (non-condensing)
<b>Non-Operating Relative Humidity Range</b>	■ 5% - 95% (non-condensing)
Power Supply	
600W Triple-redundant AC power supply with PFC	
<b>AC Voltage</b>	■ 100 - 240V, 50/60Hz, 12 Amp
<b>DC Output</b>	■ 5V + 3.3V ≤ 200W
<b>+5V</b>	■ 30.0 Amp
<b>+5V standby</b>	■ 2.0 Amp
<b>-5V</b>	■ 1.0 Amp
<b>+12V</b>	■ 40.0 Amp
<b>-12V</b>	■ 1.0 Amp
<b>+3.3V</b>	■ 36.0 Amp
Regulatory (Power Supply)	
<b>Power Supply Safety / EMC</b>	• USA - UL listed, FCC • Canada - CUL listed • Germany - TUV Certified • Europe/CE Mark • EN 60950/IEC 60950-Compliant

## Components

### Standard Parts List

Qty	Description
-----	-------------

SC942S-600 Chassis	CSE-942S-600	1	4U Chassis ( <b>Beige</b> )
	CSE-942S-600B	1	4U Chassis ( <b>Black</b> )
Cable(s)	CBL-0043	1	10" Two-drop SCSI Ultra320 Cable
	CBL-0028	1	30" Two-drop SCSI Ultra320 Cable
	CBL-0064	1	9" 3 to 3-Pin Fan Power Extension Cord
Fan(s)	FAN-0053	3	120mm Hot-swappable Fan
	FAN-0054	1	120mm Rear Exhaust Fan
Mobile Rack	CSE-M35S	2	SCSI Mobile Rack 3x 5.25" Openings to 5x 3.5" Drives
Power Supply	PWS-0044	1	SP602-TS 600W Triple Redundant Power Supply
Rear I/O	-	1	Dual LAN I/O Shield for 4U
SCA	CSE-PT17	10	1" SCA drive tray
	CSE-SCA-016	2	SCAM942 with SAF-TE
Tray(s)	CSE-PT36(B)OEM	2	5.25" Dummy Tray with Rail (B = Black)

Optional Parts List			
	Part Number	Qty	Description
Front USB Kit	CSE-PT29(B)	-	2 Ports Front USB Kit
Heatsink / Retention	-	-	Please refer to our <a href="#">Thermal Components Matrix</a>
Mobile Rack	CSE-M35T1	-	SATA Mobile Rack 3x 5.25" Openings to 5x 3.5" Drives
	CSE-M34S	-	SCSI Mobile Rack 3x 5.25" Openings to 4x Drives
	CSE-M34T	-	SATA Mobile Rack 3x 5.25" Openings to 4x Drives
Mounting Rails	CSE-PT26(B)	-	4U Chassis Rail Kit (Includes Side Handles)
Peripheral Drives	FPD-SONY-F(B)	-	Sony 3.5" Floppy Drive (Beige, B = Black)
Power Supply Module(s)	PWS-0044(M)	-	SP302-TS Module for PWS-0044
Rear I/O	-	-	Other I/O Shield for 4U / Tower Chassis