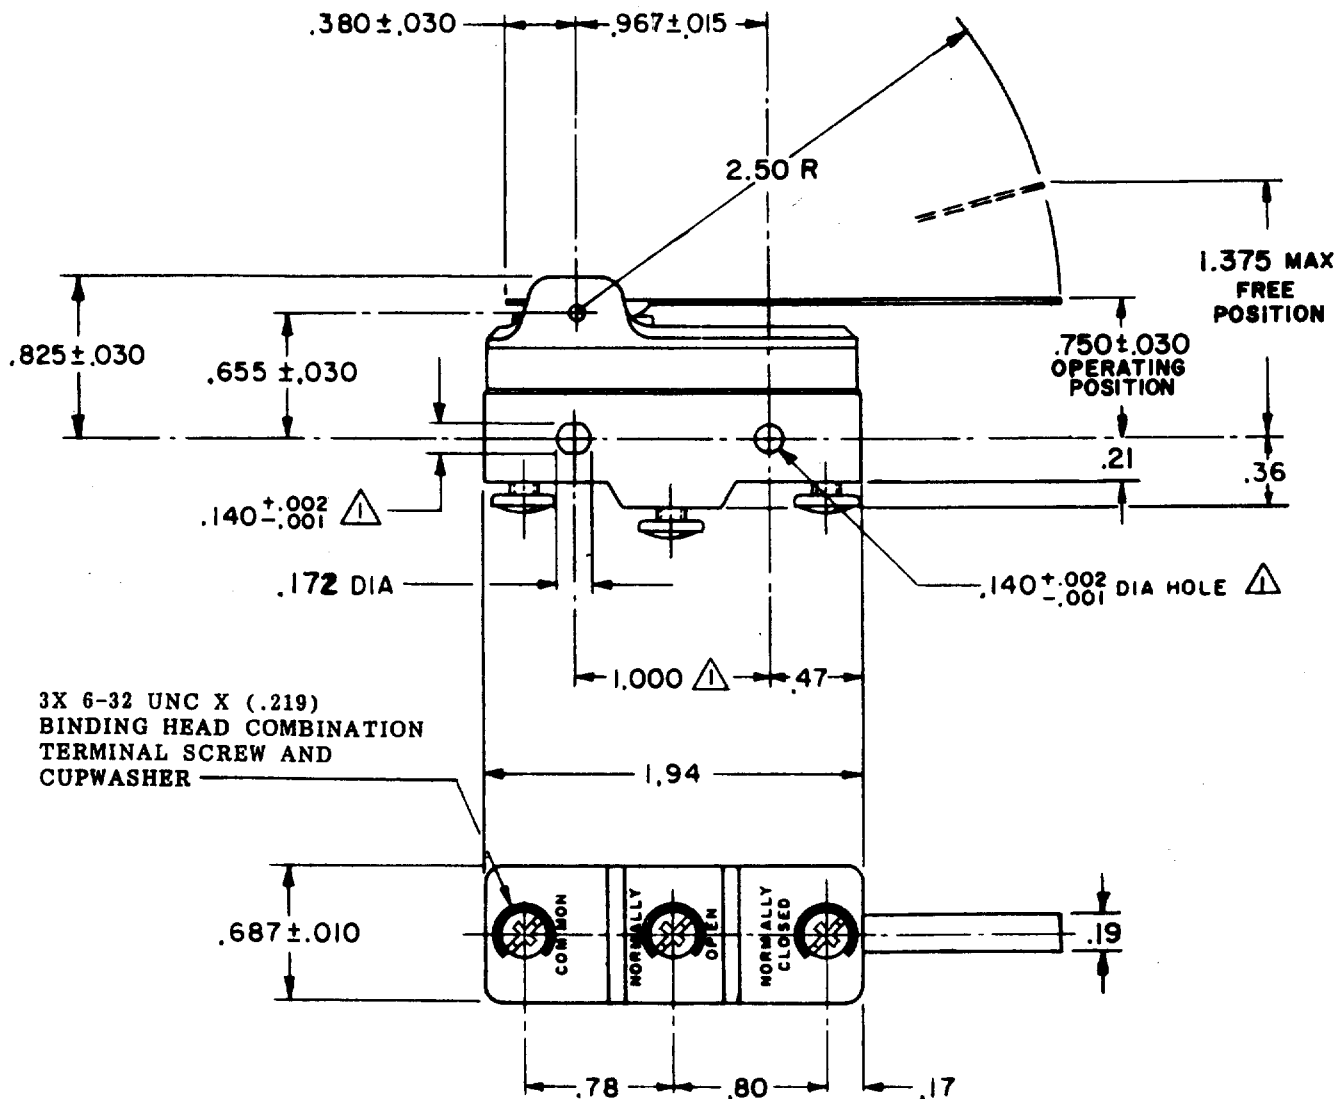


**MICRO SWITCH**FREEPORT ILLINOIS
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BE-2RV-A2

NOTE -

△ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON $1.000 \pm .002$ CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICSOPERATING FORCE ----- $2 \frac{1}{2}$ OZ MAXRELEASE FORCE ----- $\frac{1}{2}$ OZ MIN

PRETRAVEL ----- .625 MAX

DIFFERENTIAL TRAVEL ----- .109 MAX

OVERTRAVEL ----- .078 MIN

ELECTRICAL DATACONTACT ARRANGEMENT
S P D T

25-A-125, 250, 480 VAC 1 HP-125 VAC;
2 HP-250 OR 480 VAC; PILOT DUTY
750 VA-480 VAC, MAX; 60/75°C (Cu)

**SCALE FULL**

DO NOT SCALE PRINT

UNLESS OTHERWISE
SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE (.0) $\pm .030$
TWO PLACE (.00) $\pm .015$
THREE PLACE (.000) $\pm .005$
ANGLES $\pm$

WEIGHT

BE-2RV-A2DRAWING
NUMBER

ISSUE

X 7

X 8

X 9

X 10

X 11

X 12

X 13

X 14

X 15

X 16

X 17

X 18

X 19

X 20

X 21

X 22

X 23

X 24

X 25

X 26

X 27

X 28

X 29

X 30

X 31

X 32

X 33

X 34

REPLACES

RELEASE NO. SR 10871

CHECK

A CO30432

R E N

8 MAY 72

B CO

32144

6 L H

27 JUL 73

C CO36627

C J H

8 APR 76

D CO

58782

W J M

24 JAN 86

E CO-

73287-J

J A L

22 NOV 93

F CO

77590

S A D

9 JUN 94

CHECK

DAW 25 APR 63

CHECK

DAW 25 APR 63

CHECK

DAW 25 APR 63

CHECK

DAW 25 APR 63

CHECK

DAW 25 APR 63

FO-80378

DRAWN