

## IEC Appliance Inlet C14 with Fuseholder 1-pole, wired



Screw-on mounting



Snap-in version



See below:  
[Approvals and Compliances](#)

### Description

- Panel mount :  
Screw-on version from front or rear side, snap-in version from front side
- Appliance Inlet Protection class I , Fuseholder for fuse-links 5 x 20 mm 1-pole
- V-Lock notch standard
- Meets the requirements of IEC 60335-1 for appliances in unattended use. This includes the enhanced requirements of glow wire tests acc. to IEC 60695-2-11 or -12 &-13.
- Solder/Quick Connect Terminal

### Characteristics

- All single elements are already wired
- Plug removal necessary for fuse-link replacement
- Suitable for use in equipment according to IEC/UL 62368-1

### Other versions on request

- Types for rivet mounting available upon request

### References

Alternative: version with line filter [5200](#)  
Alternative: Fuseholder 2-pole [6220](#)

### Weblinks

[pdf data sheet](#), [html datasheet](#), [General Product Information](#), [Approvals](#), [Distributor-Stock-Check](#), [Accessories](#), [Detailed request for product](#)

### Technical Data

|                                   |                                                                                  |
|-----------------------------------|----------------------------------------------------------------------------------|
| Ratings IEC                       | 10A / 250VAC; 50Hz                                                               |
| Ratings UL/CSA                    | 10A / 250VAC; 60Hz                                                               |
| Dielectric Strength               | > 2 kVAC between L-N<br>> 2 kVAC between L/N-PE<br>(1 min/50 Hz)                 |
| Allowable Operation Temperature   | -25 °C to 70 °C                                                                  |
| IP-Protection                     | from front side IP40 acc. to IEC 60529                                           |
| Protection against electric shock | Suitable for appliances with protection class I acc. to IEC 61140                |
| Terminal                          | Solder/Quick Connect Terminal , tin-plated                                       |
| Panel Thickness S                 | Screw: max 6 mm<br>Mounting screw torque max 0.5 Nm<br>Snap-in: 1/1.5/2/2.5/3 mm |
| Material: Housing                 | Thermoplastic, black, UL 94V-0                                                   |

|                                   |                                                                                                                                 |
|-----------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Appliance inlet/-outlet           | C14 acc. to IEC 60320-1, UL 60320-1, CSA C22.2 no. 60320-1 (for cold conditions) pin-temperature 70 °C, 10A, Protection Class I |
| Fuseholder                        | 1-pole, Shocksafe category PC2 acc. to IEC 60127-6, UL 498, for fuse-links 5 x 20mm                                             |
| Rated Power Acceptance @ Ta 23 °C | 5 x 20: 2 W (1 pole)                                                                                                            |
| Power Acceptance @ Ta > 23°C      | Admissible power acceptance at higher ambient temperature see derating curves                                                   |

### Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

## Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products.

Approval Reference Type: 6200

| Approval Logo                                                                    | Certificates                  | Certification Body | Description                              |
|----------------------------------------------------------------------------------|-------------------------------|--------------------|------------------------------------------|
|  | <a href="#">VDE Approvals</a> | VDE                | Certificate Number: 40036853             |
|  | <a href="#">UL Approvals</a>  | UL                 | UL File Number: E93617                   |
|  | <a href="#">CCC Approvals</a> | CCC                | CCC Certificate Number: 2013010204594655 |

## Product standards

Product standards that are referenced

| Organization                                                                     | Design                | Standard              | Description                                                           |
|----------------------------------------------------------------------------------|-----------------------|-----------------------|-----------------------------------------------------------------------|
|  | Designed according to | IEC 60320-1           | Appliance couplers for household and similar general purposes         |
|  | Designed according to | IEC 60127-6           | Miniature fuses. Part 6. Fuse-holders for miniature fuse-links        |
|  | Designed according to | IEC 61058-1           | Switches for appliances. Part 1. General requirements                 |
|  | Designed according to | UL 60320-1            | Standard for Attachment Plugs and Receptacles                         |
|  | Designed according to | CSA C22.2 no. 60320-1 | General Use Receptacles, Attachment Plugs, and Similar Wiring Devices |

## Application standards

Application standards where the product can be used

| Organization                                                                       | Design                         | Standard       | Description                                                                                                                                                                                                                  |
|------------------------------------------------------------------------------------|--------------------------------|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | Designed for applications acc. | IEC/UL 62368-1 | IEC 62368-1 includes the basic requirements for safety of audio, video, information technology and office equipment.                                                                                                         |
|  | Designed for applications acc. | IEC 60335-1    | Safety of electrical appliances for household and similar purposes. Meets the requirements for appliances in unattended use. This includes the enhanced requirements of glow wire tests acc. to IEC 60695-2-11 or -12 & -13. |


## Compliances

The product complies with following Guide Lines


| Identification                                                                     | Details                                      | Initiator   | Description                                                                                                                                                                                                                  |
|------------------------------------------------------------------------------------|----------------------------------------------|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <a href="#">CE declaration of conformity</a> | SCHURTER AG | The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.                        |
|  | <a href="#">RoHS</a>                         | SCHURTER AG | Directive RoHS 2011/65/EU, Amendment (EU) 2015/863                                                                                                                                                                           |
|  | <a href="#">China RoHS</a>                   | SCHURTER AG | The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.                                                                                                         |
|  | <a href="#">REACH</a>                        | SCHURTER AG | On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.                                                      |
|  |                                              | SCHURTER AG | V-Lock system are based on a matching plug-dose combination. The connector is equipped with a notch intended for use with the latching cordset. The cord latching system prevents against accidental removal of the cordset. |
|  | <a href="#">White Paper Glow wire test</a>   | SCHURTER AG | Meets the requirements of IEC 60335-1 for appliances in unattended use. This includes the enhanced requirements of glow wire tests acc. to IEC 60695-2-11 or -12 & -13.                                                      |

## Dimensions [mm]

Screw-on mounting

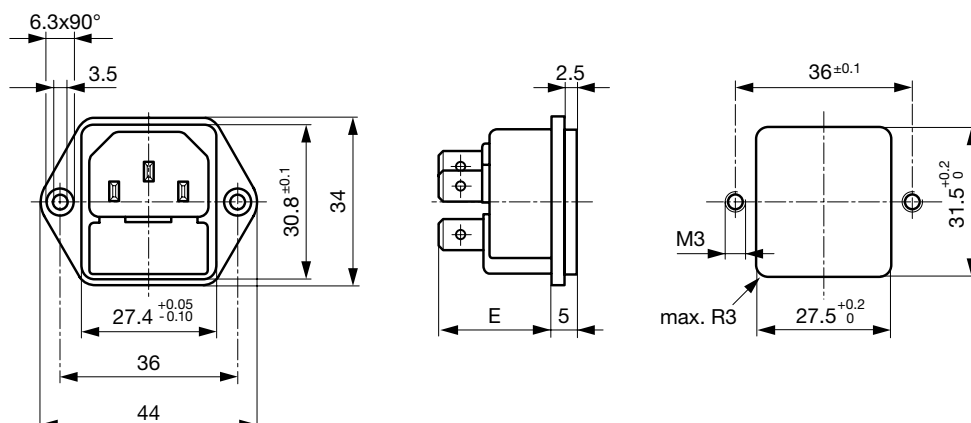


E: Solder terminals 20.5 mm  
 E: Quick connect terminals 23.5 mm  
 Snap-in mounting

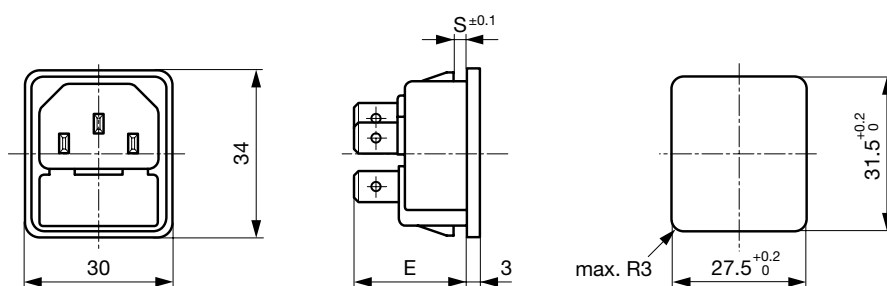


E: solder terminals 22.5 mm  
 E: quick-connect terminals 25.5 mm  
 S: 1.0/1.5/2.0/2.5/3.0 mm

## Diagrams



Derating Curves

1-pole

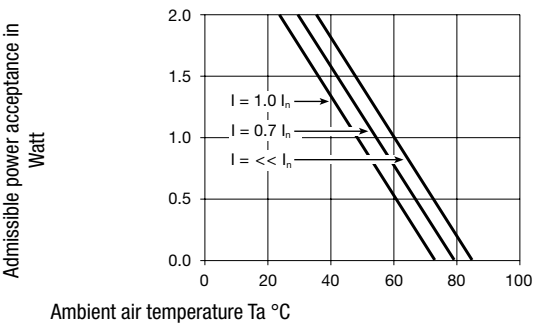

All Variants

| Protection Class | Panel mounting | Panel Thickness<br>s [mm] | Fuseholder | Terminal                             | Internally wired | Order Number |
|------------------|----------------|---------------------------|------------|--------------------------------------|------------------|--------------|
| I                | Snap-in        | 1                         | 1-pole     | Quick connect terminals 4.8 x 0.8 mm | ●                | 6200.4210    |
| I                | Snap-in        | 1.5                       | 1-pole     | Quick connect terminals 4.8 x 0.8 mm | ●                | 6200.4215    |
| I                | Snap-in        | 2                         | 1-pole     | Quick connect terminals 4.8 x 0.8 mm | ●                | 6200.4220    |
| I                | Snap-in        | 2.5                       | 1-pole     | Quick connect terminals 4.8 x 0.8 mm | ●                | 6200.4225    |
| I                | Snap-in        | 3                         | 1-pole     | Quick connect terminals 4.8 x 0.8 mm | ●                | 6200.4230    |
| I                | Snap-in        | 1                         | 1-pole     | Quick connect terminals 6.3 x 0.8 mm | ●                | 6200.4310    |
| I                | Snap-in        | 1.5                       | 1-pole     | Quick connect terminals 6.3 x 0.8 mm | ●                | 6200.4315    |
| I                | Snap-in        | 2                         | 1-pole     | Quick connect terminals 6.3 x 0.8 mm | ●                | 6200.4320    |
| I                | Snap-in        | 2.5                       | 1-pole     | Quick connect terminals 6.3 x 0.8 mm | ●                | 6200.4325    |
| I                | Snap-in        | 3                         | 1-pole     | Quick connect terminals 6.3 x 0.8 mm | ●                | 6200.4330    |
| I                | Snap-in        | 1                         | 1-pole     | Solder terminals 3.8 x 0.8 mm        | ●                | 6200.4110    |
| I                | Snap-in        | 1.5                       | 1-pole     | Solder terminals 3.8 x 0.8 mm        | ●                | 6200.4115    |
| I                | Snap-in        | 2                         | 1-pole     | Solder terminals 3.8 x 0.8 mm        | ●                | 6200.4120    |
| I                | Snap-in        | 2.5                       | 1-pole     | Solder terminals 3.8 x 0.8 mm        | ●                | 6200.4125    |
| I                | Snap-in        | 3                         | 1-pole     | Solder terminals 3.8 x 0.8 mm        | ●                | 6200.4130    |
| I                | Screw          | -                         | 1-pole     | Quick connect terminals 4.8 x 0.8 mm | ●                | 6200.2200    |
| I                | Screw          | -                         | 1-pole     | Quick connect terminals 6.3 x 0.8 mm | ●                | 6200.2300    |
| I                | Screw          | -                         | 1-pole     | Solder terminals 3.8 x 0.8 mm        | ●                | 6200.2100    |

Most Popular.

Availability for all products can be searched real-time:<https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

Packaging unit 50 Pcs

Accessories

| Description                                                                       |                                   |
|-----------------------------------------------------------------------------------|-----------------------------------|
|  | Assorted Covers                   |
|                                                                                   | Rear Cover                        |
|                                                                                   | 0859.0047                         |
|                                                                                   | 4311.9403                         |
|  | RC320                             |
|                                                                                   | Rear Cover for Power Entry Module |
|  | Cord retaining kits               |
|                                                                                   | Cord retaining strain relief      |
|                                                                                   | Flat head, A                      |
|                                                                                   | Countersunk, B                    |
|                                                                                   | 4700.0001                         |
|                                                                                   | 4700.0002                         |

Mating Outlets/Connectors

| Category / Description                                                              |                                                                                                                                             |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
|  | Appliance Outlet Overview complete                                                                                                          |
|                                                                                     | 4787, Mounting: Screw-on mounting, Appliance Outlet: IEC Solder terminals, 10 A, Suitable for appliances with protection class I            |
|                                                                                     | 4788, Mounting: Snap-in version, Appliance Outlet: IEC Solder/Quick Connect Terminal, 10 A, Suitable for appliances with protection class I |
|                                                                                     | IEC Appliance Outlet F or H, Screw-on Mounting, Front Side, Solder, PCB or Quick-connect Terminal                                           |
|                                                                                     | 4787                                                                                                                                        |
|                                                                                     | 4788                                                                                                                                        |
|                                                                                     | 5091                                                                                                                                        |
|  | Connector Overview complete                                                                                                                 |
|                                                                                     | 4782 Mounting: Power Cord, 3 x 1 mm <sup>2</sup> / 3 x 18 AWG, Cable, Connector: IEC C13                                                    |
|                                                                                     | 4785 Mounting: Power Cord, 3 x 1 mm <sup>2</sup> / 3 x 18 AWG, Cable, Connector: IEC C13                                                    |
|                                                                                     | 4300-06 Mounting: Power Cord, 3 x 1 mm <sup>2</sup> / 3 x 18 AWG, Cable, Connector: IEC C13                                                 |
|                                                                                     | 4781 Mounting: Power Cord, Cable, Connector: IEC C15                                                                                        |
|                                                                                     | 4784 Mounting: Power Cord, 3 x 1 mm <sup>2</sup> / 3 x 18 AWG, Cable, Connector: IEC C15                                                    |
|                                                                                     | 4782                                                                                                                                        |
|                                                                                     | 4785                                                                                                                                        |
|                                                                                     | 4300-06                                                                                                                                     |
|                                                                                     | 4781                                                                                                                                        |
|                                                                                     | 4784                                                                                                                                        |
|                                                                                     | ...                                                                                                                                         |

Mating Outlets/Connectors shuttered

|                                                                                     |                                                                                          |
|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|
|  | Connector Overview complete                                                              |
|                                                                                     | 4783 Mounting: Power Cord, 3 x 1 mm <sup>2</sup> / 3 x 18 AWG, Cable, Connector: IEC C13 |
|                                                                                     | 4783                                                                                     |