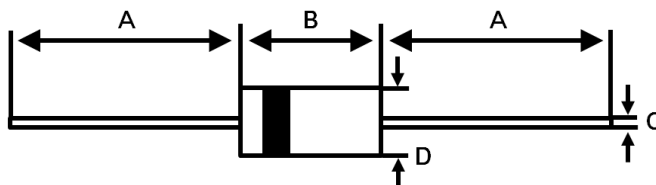


**GLASS PASSIVATED
UNIDIRECTIONAL AND BIDIRECTIONAL
TRANSIENT VOLTAGE SUPPRESSORS**
**REVERSE VOLTAGE - 6.8 to 550 Volts
POWER DISSIPATION - 600 Watts**
FEATURES

- Glass passivated chip
- Low leakage
- Uni and Bidirectional unit
- Excellent clamping capability
- The plastic material has U/L recognition 94V-0
- Fast response time
- IEC61000-4-2, $\geq \pm 30\text{KV}(\text{air})$; $\geq \pm 30\text{KV}(\text{contact})$

MECHANICAL DATA

- Case : Molded plastic
- Marking: Uni-directional type number and cathode band
Bi-directional type number only.
- Weight : 0.4 grams

DO-15


DO-15		
DIM.	MIN.	MAX
A	25.4	-
B	5.80	7.60
C	0.71Ø	0.86Ø
D	2.60Ø	3.60Ø
All Dimensions in millimeter		

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

ABSOLUTE RATINGS

PARAMETER	SYMBOL	VALUE	UNIT
Peak power dissipation @ $T_A = 25^\circ\text{C}$, $t_p = 1\text{ms}$ (Note1)	P_{PK}	600	W
Peak forward surge current 8.3ms single half sine-wave @ $T_A = 25^\circ\text{C}$ (Note2)	I_{FSM}	100	A
Steady state power dissipation @ $T_L = 100^\circ\text{C}$	$P_{M(AV)}$	5.0	W
Maximum instantaneous forward voltage @ 16A for unidirectional devices only	V_F	2.5	V
Typical thermal resistance (Note4)	R_{thJc} R_{thJL} R_{thJA}	20 15 50	$^\circ\text{C/W}$
Operating junction temperature range	T_J	-55 to +175	$^\circ\text{C}$
Storage temperature range	T_{STG}	-55 to +175	$^\circ\text{C}$

REV.16, MAR.-2020, KDID02

Notes:

1. Non-repetitive current pulse, per fig. 5 and derated above $T_J = 25^\circ\text{C}$ per fig.1.
2. Uni-Directional units only
3. $V_F \text{ max} = 2.5\text{V}$ at $I_F = 16\text{A}$ 300us square wave pulse.
4. Thermal resistance junction to case, lead and ambient.

Please be aware that an **Important Notice and Disclaimer** concerning availability, disclaimers, and use in Critical applications of LSC products thereto appears at the end of this Data Sheet.

RATING AND CHARACTERISTIC CURVES P6KE&S SERIES

FIG.1- Pulse Derating Curve

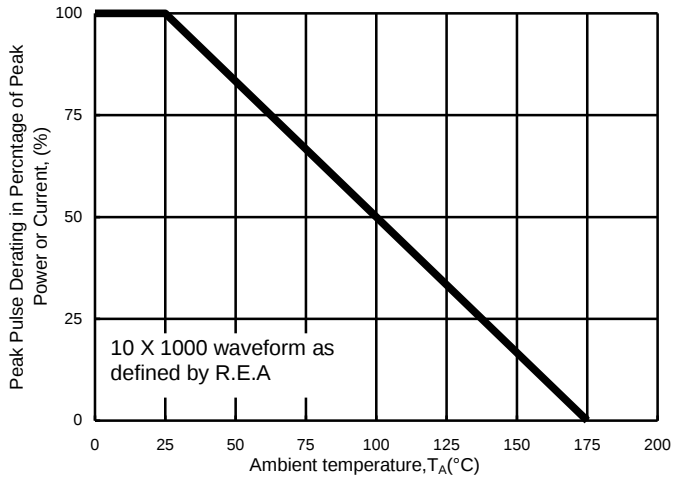


FIG.2- Typical Junction Capacitance

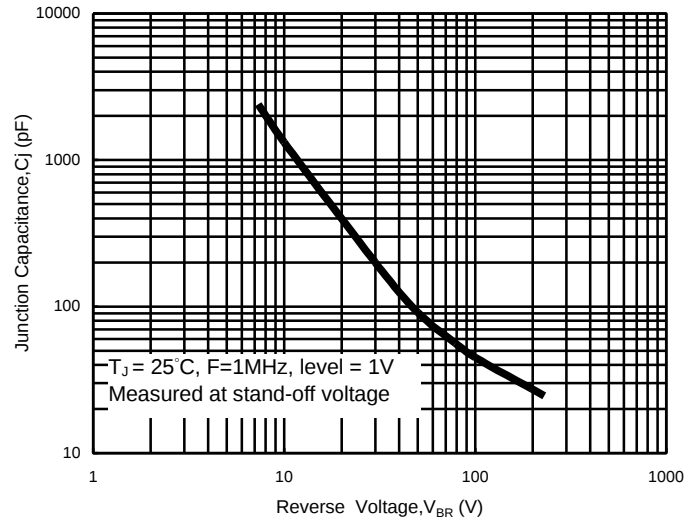


FIG.3- Peak Pulse Power Rating Curve

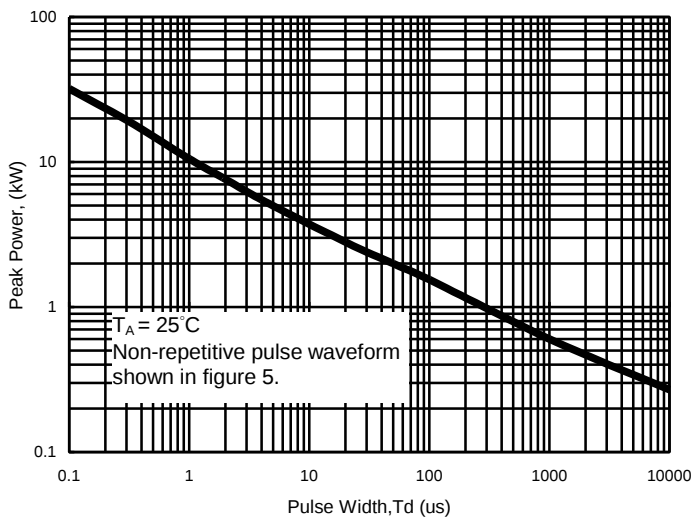


FIG.4- Steady State Power Derating Curve


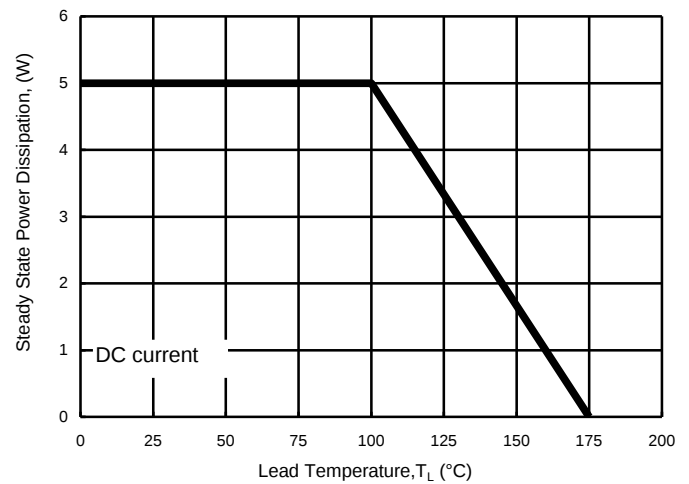


FIG.5- Pulse Waveform

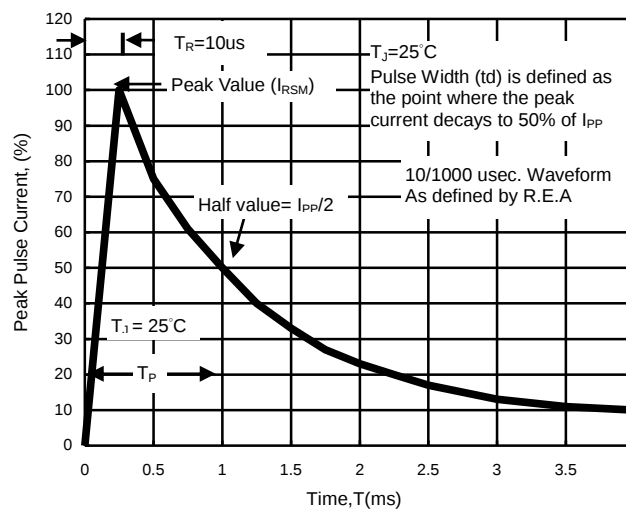

Device		Reverse standoff Voltage	Breakdown voltage V_{BR} Volts			Maximum Reverse Leakage at V_R	Maximum Reverse Surge Current	Maximum Reverse Voltage at I_{RSM} (Clamping Voltage)	Max. Voltage Temp. Variation of BV
Uni	Bi	$V_R(V)$	Min.	Max	@IT(mA)	$I_R(\mu A)$	$I_{PP}(A)$	$V_C(V)$	%/°C
P6KE6.8A	P6KE6.8CA	5.8	6.45	7.13	10	1000	57.1	10.5	0.057
P6KE7.5A	P6KE7.5CA	6.4	7.13	7.88	10	500	53.1	11.3	0.061
P6KE8.2A	P6KE8.2CA	7.0	7.79	8.61	10	200	49.6	12.1	0.065
P6KE9.1A	P6KE9.1CA	7.8	8.65	9.56	1	50	44.8	13.4	0.068
P6KE10A	P6KE10CA	8.6	9.50	10.50	1	10	41.4	14.5	0.073
P6KE11A	P6KE11CA	9.4	10.5	11.6	1	5	38.5	15.6	0.075
P6KE12A	P6KE12CA	10.2	11.4	12.6	1	0.5	35.9	16.7	0.078
P6KE13A	P6KE13CA	11.1	12.4	13.7	1	0.5	33.0	18.2	0.081
P6KE15A	P6KE15CA	12.8	14.3	15.8	1	0.5	28.3	21.2	0.084
P6KE16A	P6KE16CA	13.6	15.2	16.8	1	0.5	26.7	22.5	0.086
P6KE18A	P6KE18CA	15.3	17.1	18.9	1	0.5	23.8	25.2	0.088
P6KE20A	P6KE20CA	17.1	19.0	21.0	1	0.5	21.7	27.7	0.090
P6KE22A	P6KE22CA	18.8	20.9	23.1	1	0.5	19.6	30.6	0.092
P6KE24A	P6KE24CA	20.5	22.8	25.2	1	0.5	18.1	33.2	0.094
P6KE27A	P6KE27CA	23.1	25.7	28.4	1	0.5	16.0	37.5	0.096
P6KE30A	P6KE30CA	25.6	28.5	31.5	1	0.5	14.5	41.4	0.097
P6KE33A	P6KE33CA	28.2	31.4	34.7	1	0.5	13.1	45.7	0.098
P6KE36A	P6KE36CA	30.8	34.2	37.8	1	0.5	12.0	49.9	0.099
P6KE39A	P6KE39CA	33.3	37.1	41.0	1	0.5	11.1	53.9	0.100
P6KE43A	P6KE43CA	36.8	40.9	45.2	1	0.5	10.1	59.3	0.101
P6KE47A	P6KE47CA	40.2	44.7	49.4	1	0.5	9.3	64.8	0.101
P6KE51A	P6KE51CA	43.6	48.5	53.6	1	0.5	8.6	70.1	0.102
P6KE56A	P6KE56CA	47.8	53.2	58.8	1	0.5	7.8	77.0	0.103
P6KE62A	P6KE62CA	53.0	58.9	65.1	1	0.5	7.1	85.0	0.104
P6KE68A	P6KE68CA	58.1	64.6	71.4	1	0.5	6.5	92.0	0.104
P6KE75A	P6KE75CA	64.7	71.3	78.8	1	0.5	5.8	103.0	0.105
P6KE82A	P6KE82CA	70.1	77.9	86.1	1	0.5	5.3	113.0	0.105
P6KE91A	P6KE91CA	77.8	86.5	95.6	1	0.5	4.8	125.0	0.106
P6KE100A	P6KE100CA	85.5	95.0	105.0	1	0.5	4.4	137.0	0.106
P6KE110A	P6KE110CA	94.0	105.0	116.1	1	0.5	3.9	152.0	0.107
P6KE120A	P6KE120CA	102.0	114.0	126.0	1	0.5	3.6	165.0	0.107
P6KE130A	P6KE130CA	111.0	124.0	137.1	1	0.5	3.4	179.0	0.107
P6KE150A	P6KE150CA	128.0	143.0	158.1	1	0.5	2.9	207.0	0.108
P6KE160A	P6KE160CA	136.0	152.0	168.0	1	0.5	2.7	219.0	0.108
P6KE170A	P6KE170CA	145.0	162.0	179.1	1	0.5	2.6	234.0	0.108
P6KE180A	P6KE180CA	154.0	171.0	189.0	1	0.5	2.4	246.0	0.108
P6KE200A	P6KE200CA	171.0	190.0	210.0	1	0.5	2.2	274.0	0.108
P6KE220A	P6KE220CA	185.0	209.0	231.0	1	0.5	1.8	328.0	0.108
P6KE250A	P6KE250CA	214.0	237.0	262.0	1	0.5	1.7	344.0	0.110
P6KE300A	P6KE300CA	256.0	285.0	315.0	1	0.5	1.4	414.0	0.110
P6KS300A	P6KS300CA	256.0	285.0	315.0	1	0.5	1.4	414.0	0.110
P6KE350A	P6KE350CA	300.0	332.0	367.0	1	0.5	1.2	482.0	0.110
P6KS350A	P6KS350CA	300.0	332.0	367.0	1	0.5	1.2	482.0	0.110
P6KE400A	P6KE400CA	342.0	380.0	420.0	1	0.5	1.1	548.0	0.110
P6KS400A	P6KS400CA	342.0	380.0	420.0	1	0.5	1.1	548.0	0.110
P6KE440A	P6KE440CA	376.0	418.0	462.0	1	0.5	1.0	600.0	0.110
P6KS440A	P6KS440CA	376.0	418.0	462.0	1	0.5	1.0	600.0	0.110
P6KE480A	P6KE480CA	408.0	456.0	504.0	1	0.5	0.91	658.0	0.110
P6KE550A	P6KE550CA	467.5	522.5	577.5	1	0.5	0.80	753.5	0.113

Notes:

1. Suffix 'A' denotes 5% tolerance device.
2. Add suffix 'C' or 'CA' after part number to specify Bi-directional devices.
3. The I_R limit is double for Bi-Directional devices.

IMPORTANT NOTICE AND DISCLAIMER

LSC reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design purchase or use.

ALL INFORMATION ARE PROVIDED AS-IS, EVEN IT HAS QUALIFIED BY THE AEC-Q101 WHICH SATISFY INDUSTRIAL APPLICATION REQUIREMENT, EXCEPT AS EXPRESSLY STATED IN THIS DATA SHEET IS APPLIED FOR AUTOMOTIVE GRADE, LSC MAKE NO WARRANTIES, REPRESENTATION OR GUARANTEE, WHETHER EXPRESS, IMPLIED OR STATUTORY, INCLUDING, WITHOUT LIMITATION, REGARDING ANY MERCHANTABILITY, SATISFACTORY QUALITY, OR FITNESS FOR A PARTICULAR PURPOSE WITH RESPECT TO THE LSC TECHNOLOGY.

LSC DOES NOT ASSUME ANY LIABILITY OR COMPENSATION FOR ANY APPLICATION ASSISTANCE OR CUSTOMER PRODUCT DESIGN, AND MAKE NO WARRANTY OR ACCEPT ANY LIABILITY WITH PRODUCTS, WHICH ARE PURCHASED OR USED FOR ANY UNINTENDED OR UNAUTHORIZED APPLICATION.

No license is granted by implication or otherwise under any intellectual property rights of LSC.

LSC products are not authorized for use as critical components in life support devices or systems without express written approval of LSC.