



CoolMOS™ 1) Power MOSFET

Low $R_{DS(on)}$, high V_{DSS}
Superjunction MOSFET

$$\begin{aligned} V_{DSS} &= 600 \text{ V} \\ I_{D25} &= 47 \text{ A} \\ R_{DS(on) \text{ max}} &= 70 \text{ m}\Omega \end{aligned}$$



TO-247

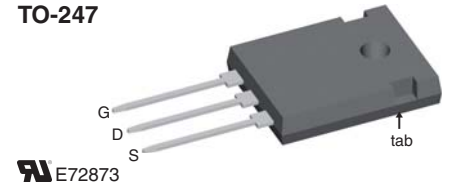

E72873

MOSFET				
Symbol	Conditions	Maximum Ratings		
V_{DSS}	$T_{VJ} = 25^\circ\text{C}$	600	V	
V_{GS}		± 20	V	
I_{D25}	$T_C = 25^\circ\text{C}$	47	A	
I_{D100}	$T_C = 100^\circ\text{C}$	30	A	
E_{AS}	single pulse $I_D = 10 \text{ A}; T_C = 25^\circ\text{C}$	1800	mJ	
E_{AR}	repetitive $I_D = 20 \text{ A}; T_C = 25^\circ\text{C}$	tbd	mJ	
dV/dt	MOSFET dV/dt ruggedness $V_{DS} = 0 \dots 480 \text{ V}$	tbd	V/ns	

Features

- 3rd generation Superjunction power MOSFET
- high blocking capability
- lowest resistance
- avalanche rated for unclamped inductive switching (UIS)
- low thermal resistance due to reduced chip thickness

Applications

- Switched mode power supplies (SMPS)
- Uninterruptible power supplies (UPS)
- Power factor correction (PFC)
- Welding
- Inductive heating

¹⁾ CoolMOS™ is a trademark of Infineon Technologies AG.

Symbol	Conditions	Characteristic Values			
		(T _{VJ} = 25°C, unless otherwise specified)			
		min.	typ.	max.	
$R_{DS(on)}$	$V_{GS} = 10 \text{ V}; I_D = I_{D100}$ ^①		60	70	mΩ
$V_{GS(th)}$	$V_{DS} = V_{GS}; I_D = 2 \text{ mA}$	2		4	V
I_{DSS}	$V_{DS} = V_{DSS}; V_{GS} = 0 \text{ V}$			25 250	μA μA
I_{GSS}	$V_{GS} = \pm 20 \text{ V}; V_{DS} = 0 \text{ V}$			± 100	nA
C_{iss}	$V_{GS} = 0 \text{ V}; V_{DS} = 100 \text{ V}$ $f = 1 \text{ MHz}$		tbd		pF
C_{oss}			tbd		pF
Q_g	$V_{GS} = 0 \text{ to } 10 \text{ V}; V_{DS} = 350 \text{ V}; I_D = 40 \text{ A}$		255	650	nC
Q_{gs}			30		nC
Q_{gd}			110		nC
$t_{d(on)}$	$V_{GS} = 10 \text{ V}; V_{DS} = 380 \text{ V}$ $I_D = 47 \text{ A}; R_G = 4.7 \Omega$		20		ns
t_r			27		ns
$t_{d(off)}$			111		ns
t_f			10		ns
R_{thJC}				0.3	K/W

^① Pulse test, $t \leq 300 \mu\text{s}$, duty cycle $d \leq 2\%$

Source-Drain Diode

Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
I_S	$V_{GS} = 0\text{ V}$			A
V_{SD}	$I_F = 40\text{ A}; V_{GS} = 0\text{ V}$			V
t_{rr} Q_{RM} I_{RM}	$I_F = 40\text{ A}; -di_F/dt = 100\text{ A}/\mu\text{s}; V_R = 640\text{ V}$			ns μC A


(T_{VJ} = 25°C, unless otherwise specified)

Component

Symbol	Conditions	Maximum Ratings	
T_{VJ}	operating	-55...+150	°C
T_{stg}		-55...+150	°C
M_d	mounting torque	1.13	Nm

Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
R_{thCH}	with heatsink compound		tbd	K/W
Weight			2.7	g


TO-247 Outline

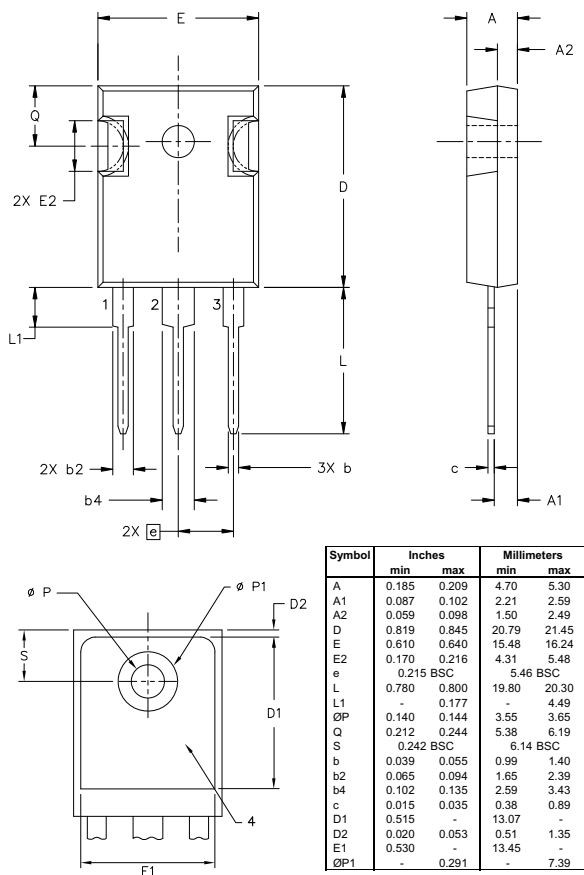


IXYS reserves the right to change limits, test conditions and dimensions.

20080523a


**Fig. 1. Output Characteristics
@ 25 Deg. C**

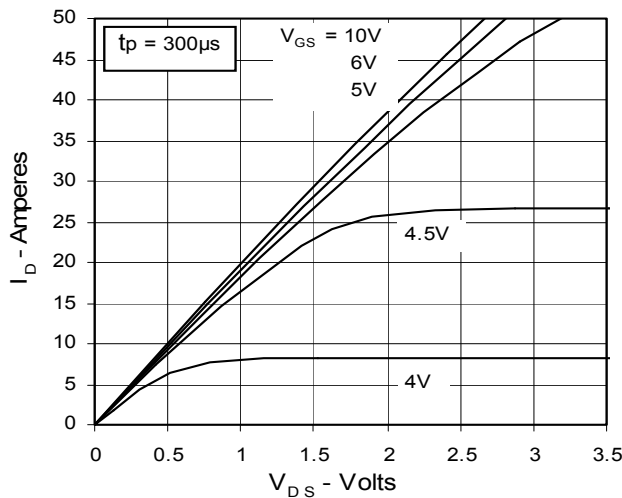


**Fig. 2. Extended Output Characteristics
@ 25 deg. C**

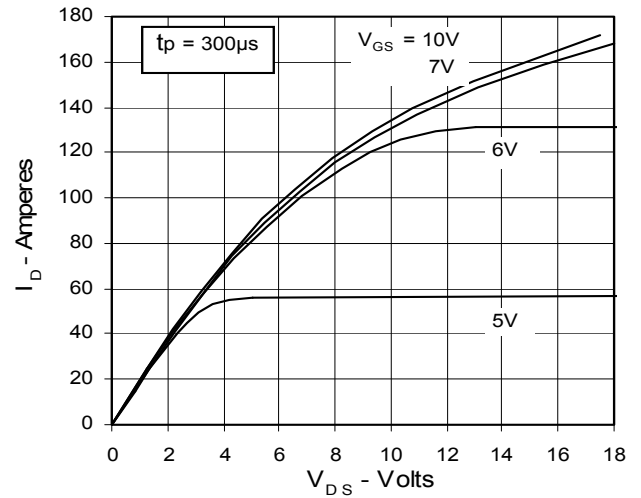


**Fig. 3. Output Characteristics
@ 125 Deg. C**

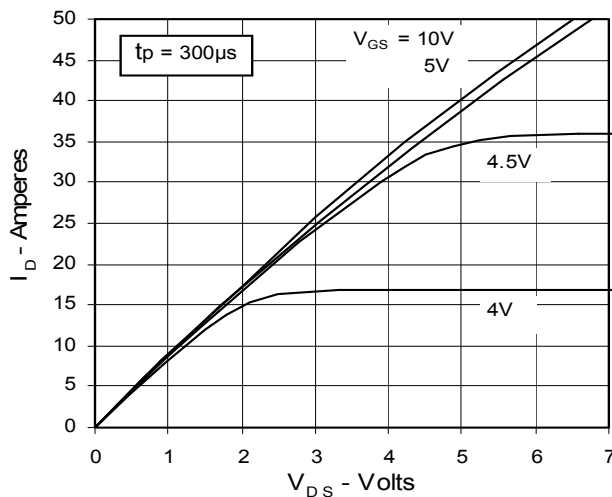

**Fig. 4. $R_{DS(on)}$ Normalized to I_{D100} Value
vs. Junction Temperature**

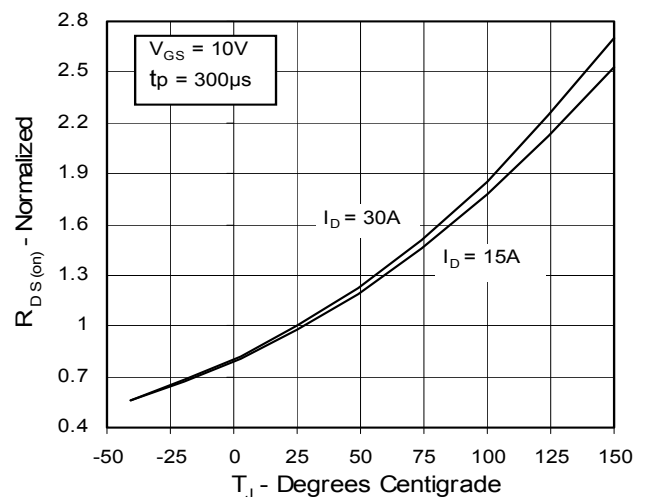

**Fig. 5. $R_{DS(on)}$ Normalized to
 I_{D100} Value vs. I_D**

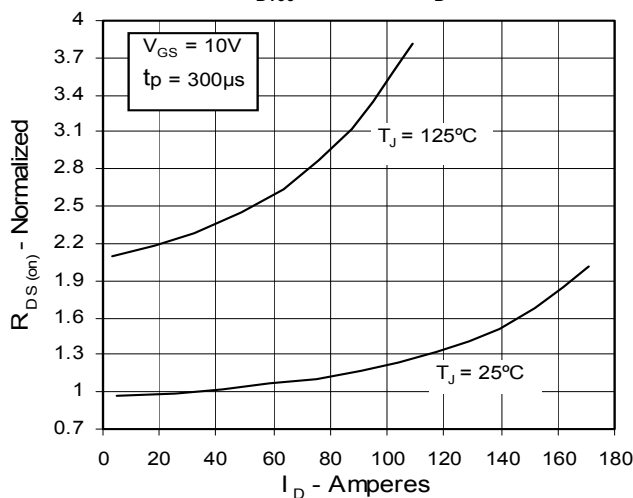

**Fig. 6. Drain Current vs. Case
Temperature**

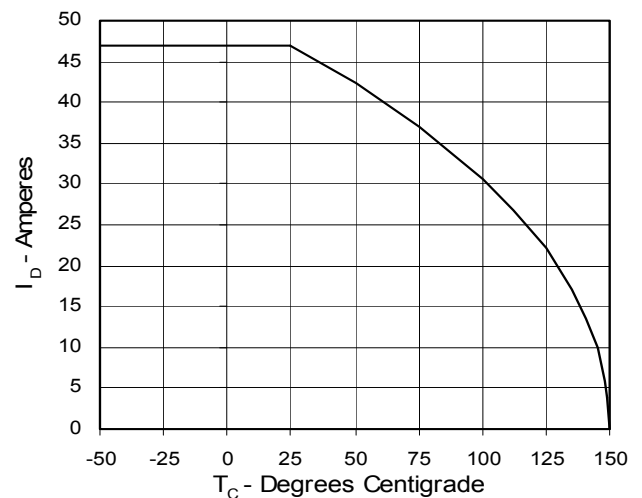


Fig. 7. Input Admittance

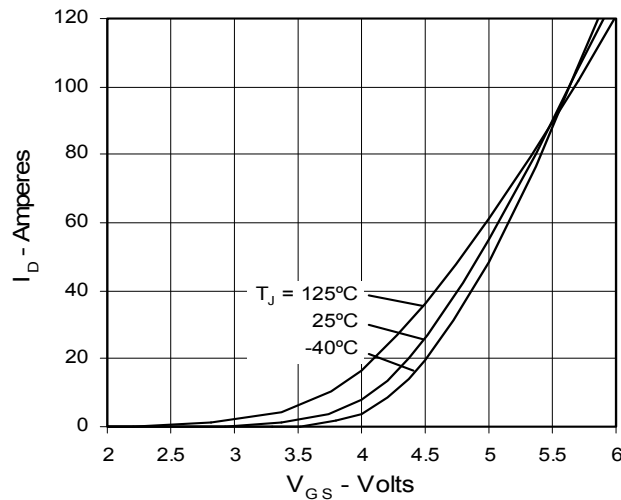


Fig. 8. Transconductance

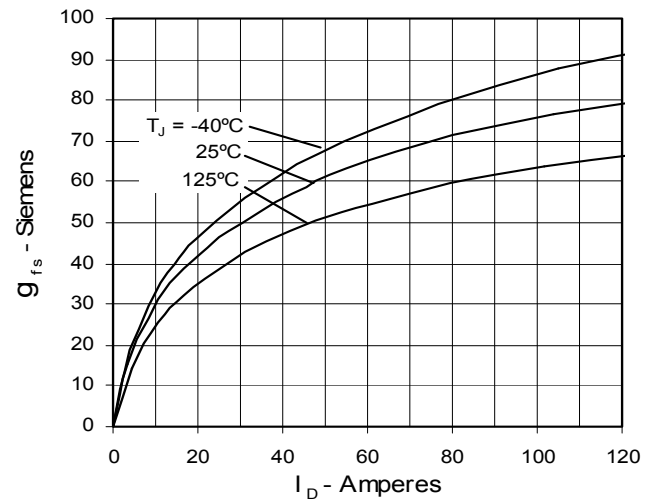


Fig. 9. Source Current vs. Source-To-Drain Voltage

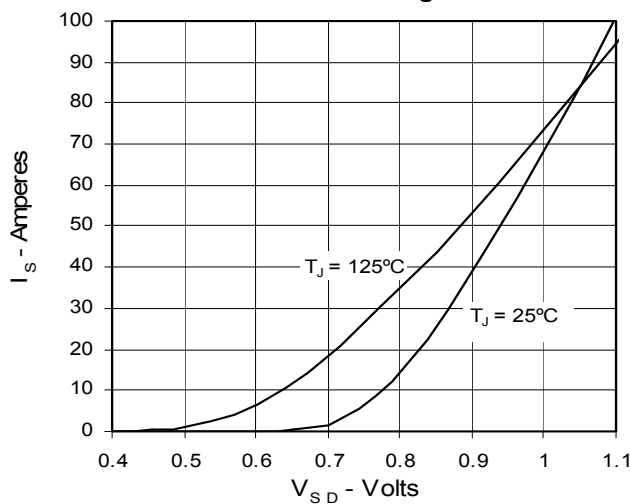


Fig. 10. Gate Charge

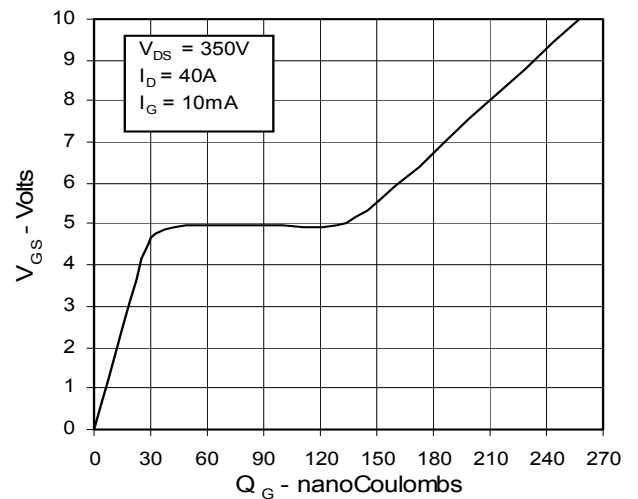


Fig. 11. Capacitance


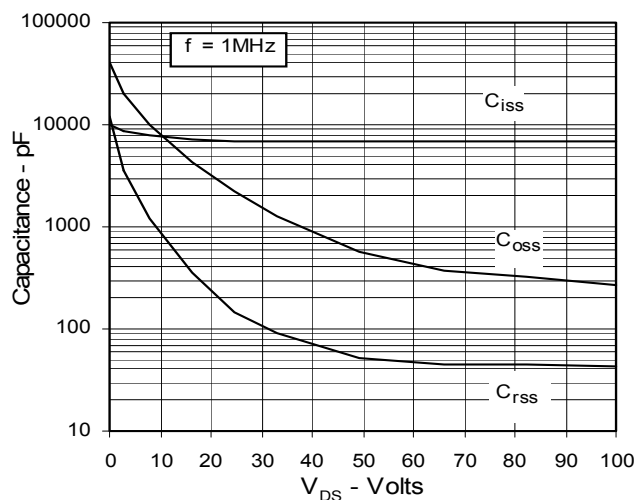


Fig. 12. Maximum Transient Thermal Resistance



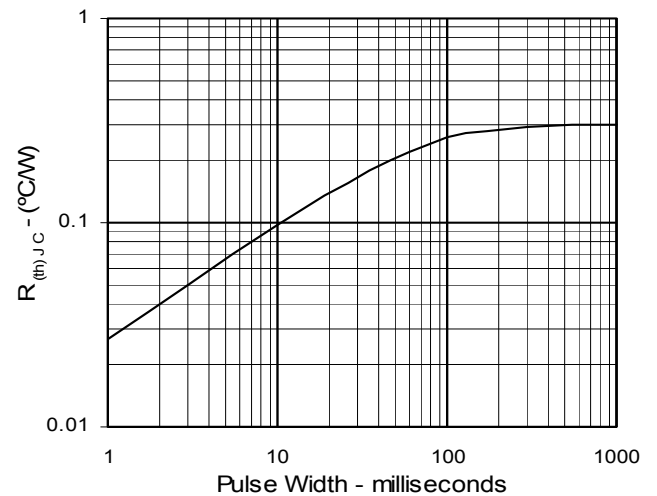

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.