TRACO POWER

DC/DC Railway Converter

TEP 160WIR Series, 160 Watt

- **Compact half-brick package**
- **Ultra wide 4:1 input voltage ranges 9–36, 18–75, 43–160 VDC**
- **EN 50155 approval for railway applications**
- **Very high efficiency up to 91%**
- **No minimum load**
- **Soft start**
- **Adjustable output voltage +10 / -20%**
- **Sense line**
- **Remote On/Off input**
- **Under voltage lock-out circuit**
- **3-year product warranty**



UL 62368-1 IEC 62368-1

The TEP 160WIR Series is a family of isolated high performance DC/DC converter modules with ultra-wide 4:1 input voltage ranges which come in a rugged, sealed industry standard half brick package. A very high efficiency allows full power operation without forced air cooling at 25°C This temperature can be increased to 40°C with optional mounted heatsink or up to 60°C when mounted on an iron base plate. The very wide input voltage range makes these converters interesting solution for battery operated systems. Typical applications are in telecom/datacom, industry control and railway systems for on board power distribution. These series is available in many optional designs on demand --> see options.

Models

Order Code	Input Voltage Range	Output Voltage nom. (adjustable)	Output Current max.	Efficiency typ.
TEP 160-2412WIR	9 - 36 VDC (24 VDC nom.)	12 VDC (9.6 - 13.2 VDC)	12'000 mA	90 %
TEP 160-2413WIR		15 VDC (12.0 - 16.5 VDC)	9'500 mA	91 %
TEP 160-2415WIR		24 VDC (19.2 - 26.4 VDC)	6'000 mA	90 %
TEP 160-2416WIR		28 VDC (22.4 - 30.8 VDC)	5'000 mA	90 %
TEP 160-2418WIR		48 VDC (38.4 - 52.8 VDC)	3'000 mA	90 %
TEP 160-4812WIR	18 - 75 VDC (48 VDC nom.)	12 VDC (9.6 - 13.2 VDC)	13'000 mA	91 %
TEP 160-4813WIR		15 VDC (12.0 - 16.5 VDC)	10'000 mA	91 %
TEP 160-4815WIR		24 VDC (19.2 - 26.4 VDC)	6'500 mA	91 %
TEP 160-4816WIR		28 VDC (22.4 - 30.8 VDC)	5'500 mA	91 %
TEP 160-4818WIR		48 VDC (38.4 - 52.8 VDC)	3'200 mA	91 %
TEP 160-7212WIR	43 - 160 VDC (110 VDC nom.)	12 VDC (9.6 - 13.2 VDC)	15'000 mA	90 %
TEP 160-7213WIR		15 VDC (12.0 - 16.5 VDC)	12'000 mA	90 %
TEP 160-7215WIR		24 VDC (19.2 - 26.4 VDC)	7'500 mA	90 %
TEP 160-7216WIR		28 VDC (22.4 - 30.8 VDC)	6'500 mA	90 %
TEP 160-7218WIR		48 VDC (38.4 - 52.8 VDC)	3'800 mA	90 %

Downloaded from Arrow.com.

Options

TEP-HS1	- Optional Heat Sink: www.tracopower.com/overview/tep-hs1
on demand (backorder with MOQ non stocking item)	- Optional model with 3.3 VDC and 40'000 mA Output, and 9 - 36 VDC Input - Optional model with 5 VDC and 28'000 mA Output, and 9 - 36 VDC Input - Optional model with 3.3 VDC and 40'000 mA Output, and 18 - 75 VDC Input - Optional model with 5 VDC and 30'000 mA Output, and 18 - 75 VDC Input - Optional model with 3.3 VDC and 43'000 mA Output, and 43 - 160 VDC Input - Optional model with 5 VDC and 32'000 mA Output, and 43 - 160 VDC Input - Optional models with Sync pin to synchronize switching frequency of up to 3 units (EMC reason) - Chassis mount models w/o filter: www.tracopower.com/overview/tep160wircm - Chassis mount models w/ filter to meet EN 55032 class A: www.tracopower.com/overview/tep160wircmf - Optional models with inverse Remote On/Off function (passive = off)

Input Specifications

Input Current	- At no load	24 Vin models:	**25 mA typ.**
		48 Vin models:	**20 mA typ.**
		110 Vin models:	**10 mA typ.**
Surge Voltage		24 Vin models:	**50 VDC max.** (1 s max.)
		48 Vin models:	**100 VDC max.** (1 s max.)
		110 Vin models:	**185 VDC max.** (1 s max.)
Under Voltage Lockout		24 Vin models:	**7.3 VDC min. / 7.7 VDC typ. / 8.1 VDC max.**
		48 Vin models:	**15.5 VDC min. / 16 VDC typ. / 16.3 VDC max.**
		110 Vin models:	**33 VDC min. / 34.5 VDC typ. / 36 VDC max.**
Recommended Input Fuse		24 Vin models:	**25'000 mA** (fast acting)
		48 Vin models:	**15'000 mA** (fast acting)
		110 Vin models:	**8'000 mA** (fast acting)
			(The need of an external fuse has to be assessed in the final application.)
Input Filter			Internal Pi-Type

Output Specifications

Output Voltage Adjustment			**−20% to +10%** (By external trim resistor)
		See application note:	www.tracopower.com/tep160wir-adj/
			Output power must not exceed rated power!
Voltage Set Accuracy			**±1% max.**
Regulation	- Input Variation (Vmin - Vmax)		**0.1% max.**
	- Load Variation (0 - 100%)		**0.1% max.**
Ripple and Noise (20 MHz Bandwidth)		3.3 Vout models:	**75 mVp-p max.** (w/ 1 µF X7R || 25 µF poscap)
		5 Vout models:	**75 mVp-p max.** (w/ 1 µF X7R || 25 µF poscap)
		12 Vout models:	**100 mVp-p max.** (w/ 1 µF X7R || 25 µF poscap)
		15 Vout models:	**100 mVp-p max.** (w/ 1 µF X7R || 25 µF poscap)
		24 Vout models:	**200 mVp-p max.** (w/ 4.7 µF X7R)
		28 Vout models:	**200 mVp-p max.** (w/ 4.7 µF X7R)
		48 Vout models:	**300 mVp-p max.** (w/ 2.2 µF X7R)

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Downloaded from Arrow.com.

Capacitive Load	- 24 Vin input	3.3 Vout models:	121'000 µF max.
		5 Vout models:	56'000 µF max.
		12 Vout models:	10'000 µF max.
		15 Vout models:	6'300 µF max.
		24 Vout models:	2'500 µF max.
		28 Vout models:	1'700 µF max.
		48 Vout models:	620 µF max.
	- 48 Vin input	3.3 Vout models:	121'000 µF max.
		5 Vout models:	60'000 µF max.
		12 Vout models:	10'800 µF max.
		15 Vout models:	6'600 µF max.
		24 Vout models:	2'700 µF max.
		28 Vout models:	1'900 µF max.
		48 Vout models:	660 µF max.
	- 110 Vin input	3.3 Vout models:	130'000 µF max.
		5 Vout models:	64'000 µF max.
		12 Vout models:	12'500 µF max.
		15 Vout models:	8'000 µF max.
		24 Vout models:	3'100 µF max.
		28 Vout models:	2'300 µF max.
		48 Vout models:	790 µF max.
Minimum Load			Not required
Temperature Coefficient			±0.02 %/K max.
Hold-up Time			10 ms min. (acc. to EN 50155 Class S2, see application note for ext. capacitor calculation: www.tracopower.com/info/holdup_en50155.pdf)
Start-up Time			75 ms typ.
Short Circuit Protection			Continuous, Automatic recovery
Output Current Limitation			120 - 150% of Iout max.
Overvoltage Protection			115 - 130% of Vout nom.
Transient Response	- Response Time		200 µs typ. / 250 µs max. (25% Load Step)

Safety Specifications

Standards	- IT / Multimedia Equipment	EN 60950-1 EN 62368-1 IEC 60950-1 IEC 62368-1 UL 60950-1 UL 62368-1
	- Railway Applications	EN 50155
	- Certification Documents	www.tracopower.com/tep160wir-safety-cert/
Energy Source	- Output, acc. to 62368-1	ES2 (48 Vout models) ES1
Power Source	- Output, acc. to 62368-1	PS3
Pollution Degree		PD 2
Over Voltage Category		Not mains connected

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Downloaded from Arrow.com.

EMC Specifications

EMI (Emissions)			EN 50121-3-2 (EMC for Rolling Stock)
	- Conducted Emissions		EN 55011 class A (with external filter)
			EN 55011 class B (with external filter)
			EN 55032 class A (with external filter)
			EN 55032 class B (with external filter)
	- Radiated Emissions		EN 55011 class A (with external filter)
			EN 55011 class B (with external filter)
			EN 55032 class A (with external filter)
			EN 55032 class B (with external filter)
		External filter proposal:	www.tracopower.com/tep160wir-emc-filter/
EMS (Immunity)			EN 50121-3-2 (EMC for Rolling Stock)
	- Electrostatic Discharge	Air:	EN 61000-4-2, ±8 kV, perf. criteria A
		Contact:	EN 61000-4-2, ±6 kV, perf. criteria A
	- RF Electromagnetic Field		EN 61000-4-3, 20 V/m, perf. criteria A
	- EFT (Burst) / Surge		EN 61000-4-4, ±2 kV, perf. criteria A
			EN 61000-4-5, ±2 kV, perf. criteria A
		Ext. input component:	24 & 48 Vin models: 2 x KY 220 µF 100 V 110 Vin models: 2 x KXJ 150 µF 200 V
	- Conducted RF Disturbances		EN 61000-4-6, 10 Vrms, perf. criteria A
	- PF Magnetic Field	Continuous:	EN 61000-4-8, 100 A/m, perf. criteria A
		1 s:	EN 61000-4-8, 1000 A/m, perf. criteria A
EMC / Environmental	- Certification Documents		www.tracopower.com/tep160wir-emc-cert/

General Specifications

Relative Humidity			95% max. (non condensing)
Temperature Ranges	- Operating Temperature		–40°C to +75°C
	- Case Temperature		+115°C max.
	- Storage Temperature		–55°C to +125°C
Power Derating	- High Temperature		Depending on model
		See application note:	www.tracopower.com/tep160wir-cc/
Over Temperature Protection Switch Off	- Protection Mode		120°C typ. (Automatic recovery at 105°C typ.)
	- Measurement Point		Base-Plate
Cooling System			Natural convection (20 LFM)
Sense Function			10% max. of Vout nom. (If sense function is not used, sense pins must be connected to corresponding polarity output pins.)
		See application note:	www.tracopower.com/tep160wir-sense/
Remote Control	- Voltage Controlled Remote (passive = on)		On: 3.0 to 12 VDC or open circuit Off: 0 to 1.2 VDC or short circuit Refers to 'Remote' and '-Vin' Pin
	- Off Idle Input Current		3 mA typ.
	- Remote Pin Input Current		-0.5 to 1.0 mA
			(Optional models with inverse Remote On/Off function (passive = off))
Altitude During Operation			2'000 m max. (for reinforced insulation) 5'000 m max. (for functional insulation)
Regulator Topology			Forward Converter
Switching Frequency			225 - 275 kHz (PWM) 250 kHz typ. (PWM)
Insulation System			Reinforced Insulation
Working Voltage (rated)			145 VAC (3.3/5 Vout models) 185 VAC (48 Vout models) 172 VAC (other Vout models)

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Downloaded from Arrow.com.

Isolation Test Voltage	- Input to Output, 60 s	3'000 VAC
	- Input to Case, 60 s	1'500 VAC
	- Output to Case, 60 s	1'500 VAC
Isolation Resistance	- Input to Output, 500 VDC	1'000 MΩ min.
Isolation Capacitance	- Input to Output, 100 kHz, 1 V	2'500 pF max.
Reliability	- Calculated MTBF	350'000 h (MIL-HDBK-217F, ground benign)
Washing Process		According to Cleaning Guideline www.tracopower.com/info/cleaning.pdf
Environment	- Vibration	MIL-STD-810F EN 61373
	- Mechanical Shock	MIL-STD-810F EN 61373
	- Thermal Shock	MIL-STD-810F
	- Flammability	EN 45545-2 www.tracopower.com/info/en45545-declaration.pdf
Housing Material		Alu base-plate w. metal case (24 and 48 Vin models) Alu base-plate w. plastic case (110 Vin models)
Base Material		Non-conductive FR4 (UL 94 V-0 rated) (24 and 48 Vin models only)
Potting Material		Silicone (UL 94 V-0 rated)
Pin Material		Copper
Pin Foundation Plating		Nickel (2 - 3 µm)
Pin Surface Plating		Tin (3 - 5 µm), matte
Housing Type		Metal Case (24 and 48 Vin models) Plastic Case (110 Vin models)
Mounting Type		PCB Mount
Connection Type		THD (Through-Hole Device)
Footprint Type		Half-Brick
Soldering Profile		Lead-Free Wave Soldering 260°C / 6 s max.
Weight		105 g
Thermal Impedance	- Case to Ambient	6.1 K/W typ. 4.6 K/W typ. (with heatsink TEP-HS1)
Environmental Compliance	- REACH Declaration	www.tracopower.com/info/reach-declaration.pdf REACH SVHC list compliant REACH Annex XVII compliant
	- RoHS Declaration	www.tracopower.com/info/rohs-declaration.pdf Exemptions: 7(a), 7(c)-I (RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule).)
	- SCIP Reference Number	2f0f12ea-8c1e-4f75-863d-c66836c1954b


Additional Information

Supporting Documents	www.tracopower.com/overview/tep160wir
Frequently Asked Questions	www.tracopower.com/glossary-faq
Glossary	www.tracopower.com/info/glossary.pdf
Service Portal	www.tracoserviceportal.com

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Downloaded from Arrow.com.

Outline Dimensions

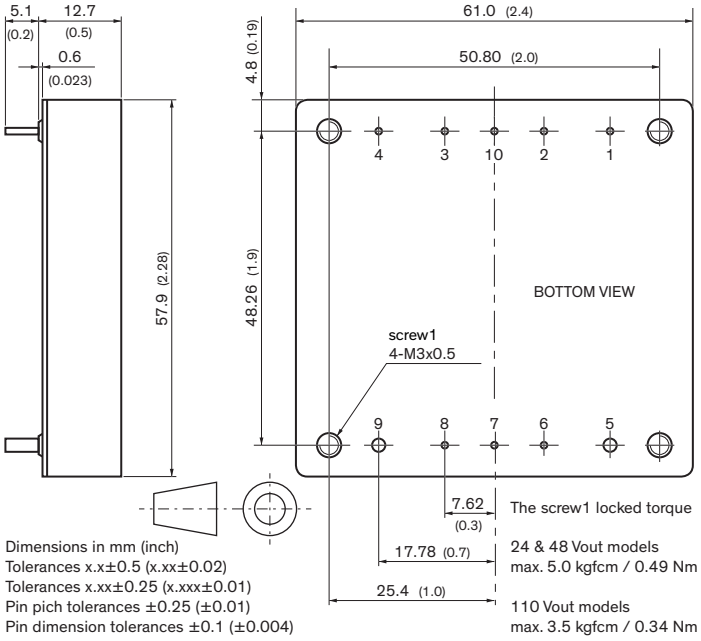

Dimensions in mm (inch)
Tolerances x.x±0.5 (x.xx±0.02)
Tolerances x.xx±0.25 (x.xxx±0.01)
Pin pich tolerances ±0.25 (±0.01)
Pin dimension tolerances ±0.1 (±0.004)

The screw1 locked torque

24 & 48 Vout models
max. 5.0 kgfcm / 0.49 Nm

110 Vout models
max. 3.5 kgfcm / 0.34 Nm

Pinout		
Pin	**Single**	**Pin Diameter**
1	–Vin (GND)	1.0 mm (0.04 inch)
2	Case	1.0 mm (0.04 inch)
3	Remote On/Off	1.0 mm (0.04 inch)
4	+Vin (Vcc)	1.0 mm (0.04 inch)
5	–Vout	2.0 mm (0.08 inch)
6	–Sense	1.0 mm (0.04 inch)
7	Trim	1.0 mm (0.04 inch)
8	+Sense	1.0 mm (0.04 inch)
9	+Vout	2.0 mm (0.08 inch)
10	Sync (on demand)	1.0 mm (0.04 inch)

Avoid routing PCB traces under the converter.

© Copyright 2026 Traco Electronic AG

Downloaded from Arrow.com.