

R9A02G011

ASSP (USB Power Delivery Controller)

R19DS0088EJ0220

Rev.2.20

Jan. 20, 2025

1. OVERVIEW

The R9A02G011 is a USB Power Delivery Controller that is based on the Universal Serial Bus (USB) Power Delivery Specification Revision 3.2 and USB Type-C™ Cable and Connector Specification Release 2.3. The R9A02G011 performs negotiation for more current and/or higher voltages over the USB cable (VBUS) than are defined in the USB2.0, USB3.0 or BC1.2 specifications, and controls circuitry to select local power source or power sink. The R9A02G011 uses a 300kbps BMC modulated signal through the CC wire in the USB Type-C™ cable. It comes in two types of packages, 32-pin QFN for easy implementation, and 42-pin BGA for reducing space, so that it can choose according to the application and PCB space. In addition, the R9A02G011 incorporates Renesas' low-power technologies.

1.1 Features

- Compliant with USB Power Delivery Specification Revision 3.2 and USB Type-C™ Cable and Connector Specification Release 2.3
 - Certified by USB Implementers Forum: TID= 12305 (Silicon), 1020074 (E-marker)
 - Supports Standard Power Range including Programmable Power Supply and SPR Adjustable Voltage Supply
 - * Not cover Extended Power Range including EPR Adjustable Voltage Supply
 - Supports IEC63002
 - Supports up to 260 bytes data transfer
 - Supports all USB Type-C™ Connection State Diagrams for USB Type-C™ port control
 - Supports alternate mode and electronically marked cables
 - Supports Dual Role operation and Role Swap protocol
 - Supports Dead Battery operation
- Integrated CC-PHY and CC-logic and many peripheral components
- Single Power Supply with wide voltage range
 - From 3.0 to 5.5V: R9A02G011GNP
 - From 2.7 to 5.5V: R9A02G011GBG
- On-chip Flash ROM, Oscillator, and Power-On-Reset (POR) circuit
- Selectable two types of packages according to the application and PCB space
- Supports SMBus Master and Slave interfaces
- Suitable for Energy Star and EuP specifications for low-power PC peripheral systems.

1.2 Applications

AC Adapter, Power outlet, USB PD Hub, PC, Tablet, Smartphone, Docking Station, PC Peripheral Device (Monitor, Printer, Router, External HDD), Consumer Electronics (DTV, STB, Home Gateway), USB Type-C™ Cable (E-Marker) etc.

Remark E-Marker: Electric marker that can return information about the cable's specifications, its manufacturer, and more.

1.3 Ordering Information

Part Number	Package	Remark
R9A02G011GNP#AC0	32-pin QFN (5 × 5 mm)	Lead-free product
R9A02G011GBG#AC0	42-pin BGA (3.6 x 3.1 mm)	Lead-free product

1.4 Block Diagram

Figure 1-1. R9A02G011 Block Diagram

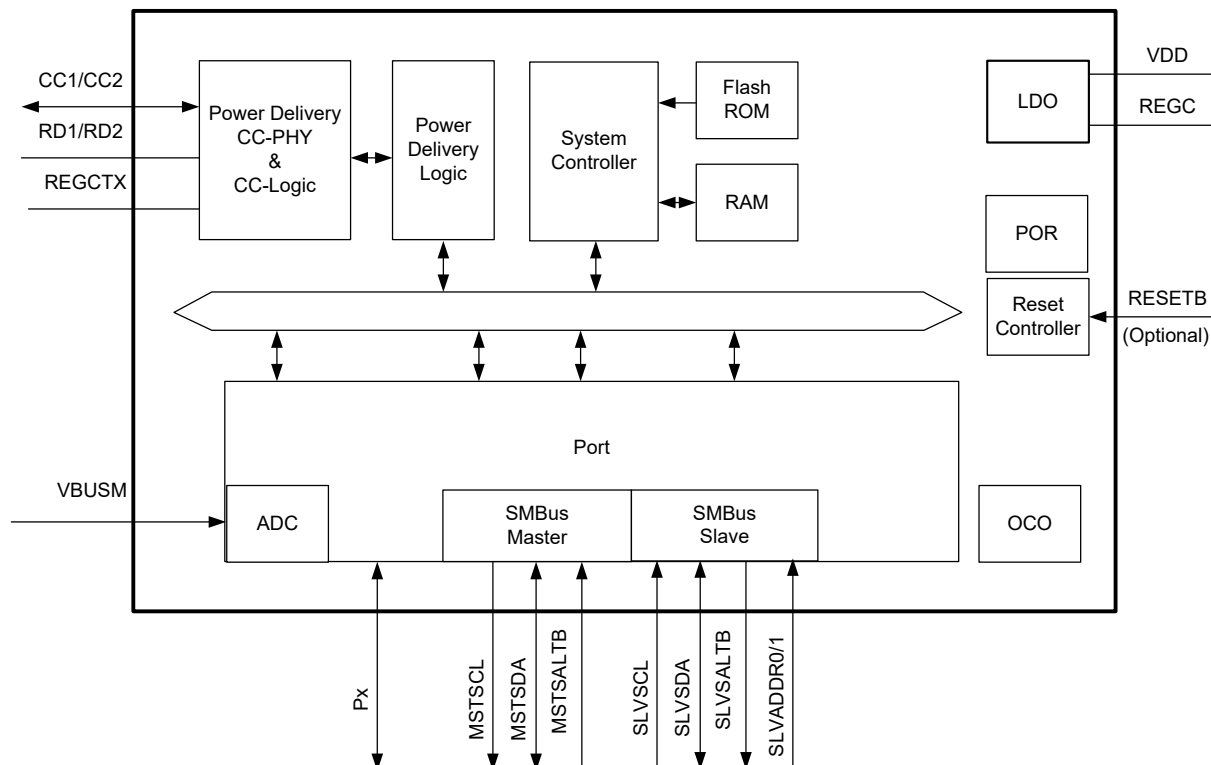



Table 1-1. Terminology

Block Name	Description
Power Delivery CC-PHY & Logic	CC-PHY (Tx/Rx), CC-logic, and LDO used for CC-PHY
Power Delivery Logic	Power Delivery logic controller
System Controller	System CPU core (RL78)
Flash ROM	Internal Flash ROM (64KB)
RAM	Internal SRAM (1.5KB)
SMBus Slave	Interface signals to external SMBus Master.
SMBus Master	Interface signals to external SMBus Slave.
Port	Controls Port I/O signals
OCO	On-Chip Oscillator
POR	Internal Power-On-Reset circuit
Reset Controller	External reset signal (Optional)
ADC	AD Converter
LDO	Low Drop Out regulator integrated in this IC

1.5 Pin Configuration


- 32-pin QFN (5 × 5 mm)

Figure 1-2. Pin Configuration of R9A02G011 32-pin QFN (Top View)

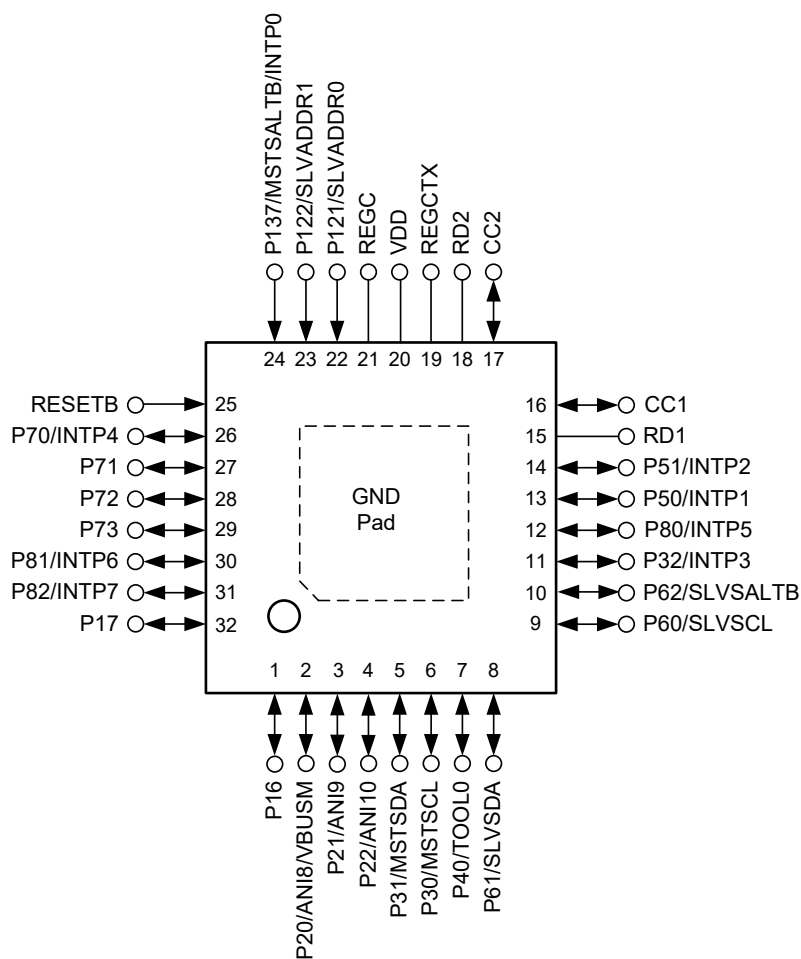

- 42-pin BGA (3.6 x 3.1 mm)

Figure 1-3. Pin Configuration of R9A02G011 42-pin BGA (Top View)

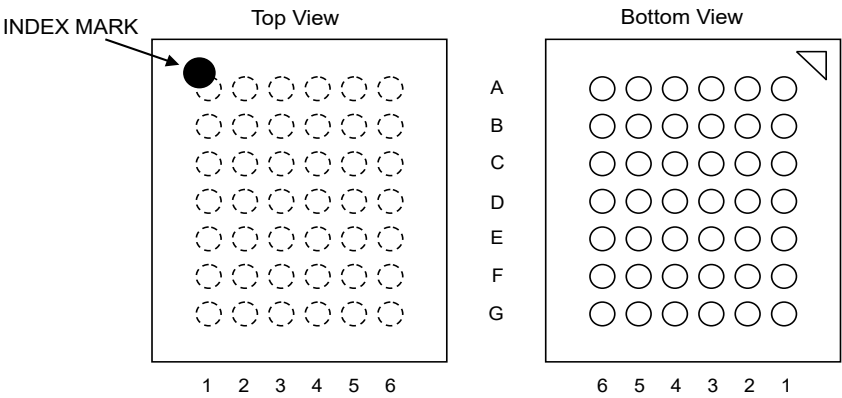

	1	2	3	4	5	6	
A	VSS	P17	P81/ INTP6	(NC)	RESETB	P137/ MSTSALT/ INTP0	A
B	VSS	P16	P73	P72	P70/ INTP4	P122/ SLVADDR1	B
C	P21/ ANI9	P20/ ANI8/ VBUSM	P82/ INTP7	P71	P121/ SLVADDR0	REGC	C
D	P30/ MSTSCL	P22/ ANI10	(NC)	VDD	VDD	VDD	D
E	P31/ MSTSDA	(NC)	P32/ INTP3	(NC)	RD2	REGCTX	E
F	(NC)	P60/ SLVSCL	P62/ SLVSALT	P80/ INTP5	RD1	CC2	F
G	P40/ TOOL0	P61/ SLVSDA	P50/ INTP1	P51/ INTP2	CC1	VSS	G
	1	2	3	4	5	6	

2. PIN FUNCTION

This section describes each pin's function.

2.1 Power supply

Pin Name	QFN Pin No.	BGA Ball No.	I/O Type	Function
VDD	20	D4/D5/D6	Power	Power supply (from 3.0V to 5.5V: R9A02G011GNP) (from 2.7V to 5.5V: R9A02G011GBG)
REGCTX	19	E6	Power	Regulator capacitance for CC-PHY. Connecting regulator output stabilization capacitance for internal operation.
REGC	21	C6	Power	Regulator capacitance. Connecting regulator output stabilization capacitance for internal operation.
VSS	Die Pad	A1/B1/G6	-	Ground

2.2 System Interface Pins

Pin Name	QFN Pin No.	BGA Ball No.	I/O Type	Function
RESETB	25	A5	IN	Chip Reset Input (L active)

2.3 USB PD and Type-C™ Port Pins

Pin Name	QFN Pin No.	BGA Ball No.	I/O Type	Function
RD1	15	F5	I/O	Rd resistor 1, Analog pin from CC-PHY.
CC1	16	G5	I/O	Configuration Channel 1, Analog pin from CC-PHY
CC2	17	F6	I/O	Configuration Channel 2, Analog pin from CC-PHY
RD2	18	E5	I/O	Rd resistor 2, Analog pin from CC-PHY

2.4 I/O Port Pins

Pin Name	QFN Pin No.	BGA Ball No.	I/O Type	During reset	After reset	Function
P16	1	B2	I/O	Input	Input	Port 1, 2 bit I/O port.
P17	32	A2	I/O	Input	Input	Port 1, 2 bit I/O port.

Pin Name	QFN Pin No.	BGA Ball No.	I/O Type	During reset	After reset	Function
P20	2	C2	I/O	Input	Input	Port 2, 3 bit I/O port. It is also configurable as VBUSM or ANI8
P21	3	C1	I/O	Input	Input	Port 2, 3 bit I/O port. It is also configurable as ANI9
P22	4	D2	I/O	Input	Input	Port 2, 3 bit I/O port. It is also configurable as ANI10
P30	6	D1	I/O	Input	Input	Port 3, 3 bit I/O port. It is also configurable as MSTSCL.
P31	5	E1	I/O	Input	Input	Port 3, 3 bit I/O port. It is also configurable as MSTSDA
P32	11	E3	I/O	Input	Input	Port 3, 3 bit I/O port. It is also configurable as INTP3
P40	7	G1	I/O	Input	Input Pull-up	Port 4, 1 bit I/O port. It is also configurable as TOOL0
P50	13	G3	I/O	Input	Input	Port 5, 2 bit I/O port. It is also configurable as INTP1
P51	14	G4	I/O	Input	Input	Port 5, 2 bit I/O port. It is also configurable as INTP2
P60	9	F2	I/O	Input	Input	Port 6, 3 bit I/O port. It is also configurable as SLVSCL
P61	8	G2	I/O	Input	Input	Port 6, 3 bit I/O port. It is also configurable as SLVSDA
P62	10	F3	I/O	Input	Input	Port 6, 3 bit I/O port. It is also configurable as SLVSALTB
P70	26	B5	I/O	Input	Input	Port 7, 4 bit I/O port. It is also configurable as INTP4
P71	27	C4	I/O	Input	Input	Port 7, 4 bit I/O port.
P72	28	B4	I/O	Input	Input	Port 7, 4 bit I/O port.
P73	29	B3	I/O	Input	Input	Port 7, 4 bit I/O port.
P80	12	F4	I/O	Input	Input	Port 8, 3 bit I/O port. It is also configurable as INTP5
P81	30	A3	I/O	Input	Input	Port 8, 3 bit I/O port. It is also configurable as INTP6
P82	31	C3	I/O	Input	Input	Port 8, 3 bit I/O port. It is also configurable as INTP7
P121	22	C5	IN	Input	Input	Port 12, 2 bit Input port. It is also configurable as SLVADDR0
P122	23	B6	IN	Input	Input	Port 12, 2 bit Input port. It is also configurable as SLVADDR1
P137	24	A6	IN	Input	Input	Port 13, 1 bit Input port. It is also configurable as MSTSALTB or INTP0.

2.5 Alternate Functions on I/O Port Pins

I/O ports support the following alternate functions.

Function Name	I/O	Function
ANI8 to ANI10	Input	Analog Input
MSTSCL	I/O	SMBus master clock input/output (open-drain) Note 1
MSTSDA	I/O	SMBus master data input/output (open-drain) Note 1
MSTSALTB	Input	SMBus master alert input Note 1
SLVSCL	I/O	SMBus slave clock input/output (open-drain) Note 2
SLVSDA	I/O	SMBus slave data input/output (open-drain) Note 2
SLVSALTB	Output	SMBus slave alert output (open-drain)
SLVADDR0	input	SMBus slave address bit [1] Note 2
SLVADDR1	input	SMBus slave address bit [2] Note 2
VBUSM	Input	VBUS voltage monitor input. The pin assignment is fixed to this function.
INTP0 to INTP7	Input	Interrupt detection input. The valid edge (rising edge, falling edge, or rising and falling edges) can be specified.
TOOL0	I/O	Data input/output for flash programming tool. The pin assignment is fixed to this function.

Note 1. The pin assignment is fixed to this function when SMBus Master is enabled.

Note 2. The pin assignment is fixed to this function when SMBus Slave is enabled.

3. ELECTRICAL SPECIFICATIONS

This chapter describes the following electrical specifications.

3.1 Absolute Maximum Ratings

Absolute Maximum Ratings (1/2)

Parameter	Symbols	Conditions	Ratings	Unit
Supply voltage	V_{DD}		-0.5 to +6.5	V
	V_{SS}		-0.5 to +0.3	V
REGC pin input voltage	V_{IREGC}	REGC	-0.3 to +2.8 and -0.3 to $V_{DD} + 0.3$ ^{Note 1}	V
	$V_{IREGCTX}$	REGCTX	-0.3 to +2.8	V
Input voltage	V_i	P16, P17, P20 to P22, P30 to P32, P40, P50, P51, P60 to P62, P70 to P73, P80 to P82, P121, P122, P137, RESETB	-0.3 to $V_{DD} + 0.3$ ^{Note 2}	V
Output voltage	V_o	P16, P17, P20 to P22, P30 to P32, P40, P50, P51, P60 to P62, P70 to P73, P80 to P82	-0.3 to $V_{DD} + 0.3$ ^{Note 2}	V
Analog input voltage	V_{AI1}	ANI8 to ANI10	-0.3 to $V_{DD} + 0.3$ ^{Note 2}	V
	V_{AI2}	CC1, CC2, RD1, RD2	-0.5 to +6.5	V

Notes 1. Connect the REGC pin to V_{SS} via a capacitor (0.47 to 1 μ F). This value regulates the absolute maximum rating of the REGC pin. Do not use this pin with voltage applied to it.

2. Must be 6.5 V or lower.

Caution Product quality may suffer if the absolute maximum rating is exceeded even momentarily for any parameter. That is, the absolute maximum ratings are rated values at which the product is on the verge of suffering physical damage, and therefore the product must be used under conditions that ensure that the absolute maximum ratings are not exceeded.

Remarks 1. Unless specified otherwise, the characteristics of alternate-function pins are the same as those of the port pins.

2. V_{SS} : Reference voltage

Absolute Maximum Ratings (2/2)

Absolute maximum ratings (2/2)					
Parameter	Symbols	Conditions		Ratings	Unit
Output current, high	I _{OH1}	Per pin	P16, P17, P20 to P22, P30 to P32, P40, P50, P51, P60 to P62, P70 to 73, P80 to P82	–40	mA
		Total of all pins		–170	mA
Output current, low	I _{OL1}	Per pin	P16, P17, P20 to P22, P30 to P32, P40, P50, P51, P60 to P62, P70 to 73, P80 to P82	40	mA
		Total of all pins		170	mA
Operating ambient temperature	T _A	In normal operation mode		–40 to +105: R9A02G011GNP –40 to +90: R9A02G011GBG	°C
		In flash memory programming mode			
Storage temperature	T _{stg}			–65 to +150: R9A02G011GNP –55 to +90: R9A02G011GBG	°C

Caution Product quality may suffer if the absolute maximum rating is exceeded even momentarily for any parameter. That is, the absolute maximum ratings are rated values at which the product is on the verge of suffering physical damage, and therefore the product must be used under conditions that ensure that the absolute maximum ratings are not exceeded.

Remark Unless specified otherwise, the characteristics of alternate-function pins are the same as those of the port pins.

3.2 Oscillator Characteristics

3.2.1 On-chip oscillator characteristics of R9A02G011GNP

($T_A = -40$ to $+105^\circ\text{C}$, $3.0\text{ V} \leq V_{DD} \leq 5.5\text{ V}$, $V_{SS} = 0\text{ V}$)

Oscillators	Parameters	Conditions		MIN.	TYP.	MAX.	Unit
High-speed on-chip oscillator clock frequency Notes 1	f_{IH}				24		MHz
High-speed on-chip oscillator clock frequency accuracy		-20 to $+85^\circ\text{C}$	$3.0\text{ V} \leq V_{DD} \leq 5.5\text{ V}$	-1		+1	%
		-40 to -20°C	$3.0\text{ V} \leq V_{DD} \leq 5.5\text{ V}$	-1.5		+1.5	%
		$+85$ to $+105^\circ\text{C}$	$3.0\text{ V} \leq V_{DD} \leq 5.5\text{ V}$	-2		+2	%

Notes 1. This indicates the oscillator characteristics only. Refer to AC Characteristics for instruction execution time.

3.2.2 On-chip oscillator characteristics of R9A02G011GBG

($T_A = -40$ to $+90^\circ\text{C}$, $2.7\text{ V} \leq V_{DD} \leq 5.5\text{ V}$, $V_{SS} = 0\text{ V}$)

Oscillators	Parameters	Conditions		MIN.	TYP.	MAX.	Unit
High-speed on-chip oscillator clock frequency Notes 2	f_{IH}				24		MHz
High-speed on-chip oscillator clock frequency accuracy		-20 to $+85^\circ\text{C}$	$2.7\text{ V} \leq V_{DD} \leq 5.5\text{ V}$	-1		+1	%
		-40 to -20°C	$2.7\text{ V} \leq V_{DD} \leq 5.5\text{ V}$	-1.5		+1.5	%
		$+85$ to $+90^\circ\text{C}$	$2.7\text{ V} \leq V_{DD} \leq 5.5\text{ V}$	-2		+2	%

Notes 2. This indicates the oscillator characteristics only. Refer to AC Characteristics for instruction execution time.

3.3 DC Characteristics

3.3.1 Pin characteristics of R9A02G011GNP

($T_A = -40$ to $+105^\circ\text{C}$, $3.0\text{ V} \leq V_{DD} \leq 5.5\text{ V}$, $V_{SS} = 0\text{ V}$) (1/3)

Items	Symbol	Conditions		MIN.	TYP.	MAX.	Unit
Input voltage, high	V _{IH1}	P16, P17, P20 to P22, P30 to P32, P50, P51, P60 to P62, P70 to P73, P80 to P82	TTL input buffer 4.0 V ≤ V _{DD} ≤ 5.5 V	2.2		V _{DD}	V
			TTL input buffer 3.3 V ≤ V _{DD} < 4.0 V	2.0		V _{DD}	V
			TTL input buffer 3.0 V ≤ V _{DD} < 3.3 V	1.5		V _{DD}	V
	V _{IH2}	P40, P121, P122, P137, RESETB		0.8 V _{DD}		V _{DD}	V
Input voltage, low	V _{IL1}	P16, P17, P20 to P22, P30 to P32, P50, P51, P60 to P62, P70 to P73, P80 to P82	TTL input buffer 4.0 V ≤ V _{DD} ≤ 5.5 V	0		0.8	V
			TTL input buffer 3.3 V ≤ V _{DD} < 4.0 V	0		0.5	V
			TTL input buffer 3.0 V ≤ V _{DD} < 3.3 V	0		0.32	V
	V _{IL2}	P40, P121, P122, P137, RESETB		0		0.2 V _{DD}	V

Caution The maximum value of all pins is V_{DD} , even in the N-ch open-drain mode.

Remark Unless specified otherwise, the characteristics of alternate-function pins are the same as those of the port pins.

(T_A = -40 to +105°C, 3.0 V ≤ V_{DD} ≤ 5.5 V, V_{SS} = 0 V) (2/3)

Items	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Output voltage, high	V _{OH1}	P16, P17, P20 to P22, P30 to P32, P40, P50, P51, P60 to P62, P70 to P73, P80 to P82	3.0 V ≤ V _{DD} ≤ 5.5 V, I _{OH1} = -1.5 mA	V _{DD} - 0.5		V
Output voltage, low	V _{OL1}	P16, P17, P20 to P22, P30 to P32, P40, P50, P51, P60 to P62, P70 to P73, P80 to P82	3.0 V ≤ V _{DD} ≤ 5.5 V, I _{OL1} = 1.5 mA		0.4	V

Caution All pins do not output high level in N-ch open-drain mode.**Remark** Unless specified otherwise, the characteristics of alternate-function pins are the same as those of the port pins.**(T_A = -40 to +105°C, 3.0 V ≤ V_{DD} ≤ 5.5 V, V_{SS} = 0 V) (3/3)**

Items	Symbol	Conditions		MIN.	TYP.	MAX.	Unit
Input leakage current, high	I _{LIH1}	P16, P17, P20 to P22, P30 to P32, P40, P50, P51, P60 to P62, P70 to P73, P80 to P82, P137, RESETB	V _I = V _{DD}			1	μA
	I _{LIH2}	P121, P122	V _I = V _{DD} , In input port			1	μA
Input leakage current, low	I _{LIL1}	P16, P17, P20 to P22, P30 to P32, P40, P50, P51, P60 to P62, P70 to P73, P80 to P82, P137, RESETB	V _I = V _{SS}			−1	μA
	I _{LIL2}	P121, P122	V _I = V _{SS} , In input port			−1	μA
On-chip pull-up resistance	R _U	P16, P17, P20 to P22, P30 to P32, P40, P50, P51, P60 to P62, P70 to P73, P80 to P82	V _I = V _{SS} , In input port	10	20	100	kΩ

Remark Unless specified otherwise, the characteristics of alternate-function pins are the same as those of the port pins.

3.3.2 Pin characteristics of R9A02G011GBG

(T_A = -40 to +90°C, 2.7 V ≤ V_{DD} ≤ 5.5 V, V_{SS} = 0 V) (1/3)

Items	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input voltage, high	V _{IH1}	P16, P17, P20 to P22, P30 to P32, P50, P51, P60 to P62, P70 to P73, P80 to P82	TTL input buffer 4.0 V ≤ V _{DD} ≤ 5.5 V	2.2	V _{DD}	V
			TTL input buffer 3.3 V ≤ V _{DD} < 4.0 V	2.0	V _{DD}	V
			TTL input buffer 2.7 V ≤ V _{DD} < 3.3 V	1.5	V _{DD}	V
	V _{IH2}	P40, P121, P122, P137, RESETB	0.8 V _{DD}		V _{DD}	V
Input voltage, low	V _{IL1}	P16, P17, P20 to P22, P30 to P32, P50, P51, P60 to P62, P70 to P73, P80 to P82	TTL input buffer 4.0 V ≤ V _{DD} ≤ 5.5 V	0	0.8	V
			TTL input buffer 3.3 V ≤ V _{DD} < 4.0 V	0	0.5	V
			TTL input buffer 2.7 V ≤ V _{DD} < 3.3 V	0	0.32	V
	V _{IL2}	P40, P121, P122, P137, RESETB	0		0.2 V _{DD}	V

Caution The maximum value of all pins is V_{DD}, even in N-ch open-drain mode.**Remark** Unless specified otherwise, the characteristics of alternate-function pins are the same as those of the port pins.

(T_A = –40 to +90°C, 2.7 V ≤ V_{DD} ≤ 5.5 V, V_{SS} = 0 V) (2/3)

Items	Symbol	Conditions		MIN.	TYP.	MAX.	Unit
Output voltage, high	V _{OH1}	P16, P17, P20 to P22, P30 to P32, P40, P50, P51, P60 to P62, P70 to P73, P80 to P82	2.7 V ≤ V _{DD} ≤ 5.5 V, I _{OH1} = –1.5 mA	V _{DD} – 0.5			V
Output voltage, low	V _{OL1}	P16, P17, P20 to P22, P30 to P32, P40, P50, P51, P60 to P62, P70 to P73, P80 to P82	2.7 V ≤ V _{DD} ≤ 5.5 V, I _{OL1} = 1.5 mA			0.4	V

Caution All pins do not output high level in N-ch open-drain mode.**Remark** Unless specified otherwise, the characteristics of alternate-function pins are the same as those of the port pins.**(T_A = –40 to +90°C, 2.7 V ≤ V_{DD} ≤ 5.5 V, V_{SS} = 0 V) (3/3)**

Items	Symbol	Conditions		MIN.	TYP.	MAX.	Unit
Input leakage current, high	I _{LIH1}	P16, P17, P20 to P22, P30 to P32, P40, P50, P51, P60 to P62, P70 to 73, P80 to P82, P137, RESETB	V _{I1} = V _{DD}			1	μA
	I _{LIH2}	P121, P122	V _{I1} = V _{DD} , In input port			1	μA
Input leakage current, low	I _{LIL1}	P16, P17, P20 to P22, P30 to P32, P40, P50, P51, P60 to P62, P70 to 73, P80 to P82, P137, RESETB	V _{I1} = V _{SS}			–1	μA
	I _{LIL2}	P121, P122	V _{I1} = V _{SS} , In input port			–1	μA
On-chip pull-up resistance	R _U	P16, P17, P20 to P22, P30 to P32, P40, P50, P51, P60 to P62, P70 to 73, P80 to P82	V _{I1} = V _{SS} , In input port	10	20	100	kΩ

Remark Unless specified otherwise, the characteristics of alternate-function pins are the same as those of the port pins.


3.4 AC Characteristics

R9A02G011GNP: ($T_A = -40$ to $+105^\circ\text{C}$, $3.0\text{ V} \leq V_{DD} \leq 5.5\text{ V}$, $V_{SS} = 0\text{ V}$)


R9A02G011GBG: ($T_A = -40$ to $+90^\circ\text{C}$, $2.7\text{ V} \leq V_{DD} \leq 5.5\text{ V}$, $V_{SS} = 0\text{ V}$)

Items	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
RESETB low-level width	t_{RSL}		10			μs

AC Timing Test Points



RESETB Input Timing

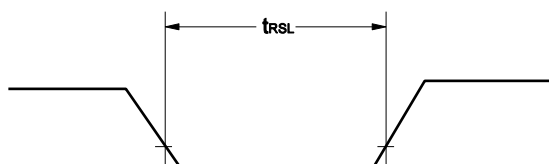

3.5 Peripheral Functions Characteristics


3.5.1 SMBus Interface

R9A02G011GNP: ($T_A = -40$ to $+105^\circ\text{C}$, $3.0\text{ V} \leq V_{DD} \leq 5.5\text{ V}$, $V_{SS} = 0\text{ V}$)

R9A02G011GBG: ($T_A = -40$ to $+90^\circ\text{C}$, $2.7\text{ V} \leq V_{DD} \leq 5.5\text{ V}$, $V_{SS} = 0\text{ V}$)

Parameter	Symbol	Condition	100 kHz Class		400 kHz Class		1 MHz Class		Units
			MIN	MAX	MIN	MAX	MIN	MAX	
SMBus operating frequency	F_{SMB}		10	100	10	400	10	1000	kHz
Bus free time between stop and start condition	T_{BUF}		4.7		1.3		0.5		μs
Hold time after (Repeated) start condition. After this period, the first clock is generated.	$T_{\text{HD:STA}}$		4.0		0.6		0.26		μs
Repeated start condition setup time	$T_{\text{SU:STA}}$		4.7		0.6		0.26		μs
Stop condition setup time	$T_{\text{SU:STO}}$		4.0		0.6		0.26		μs
Data hold time	$T_{\text{HD:DAT}}$		0		0		0		ns
Data setup time	$T_{\text{SU:DAT}}$		250		100		50		ns
Clock low period	T_{LOW}		4.7		1.3		0.5		μs
Clock high period	T_{HIGH}		4.0	50	0.6	50	0.26	50	μs
Cumulative clock low extend time (slave device)	$T_{\text{LOW:SEXT}}$			25		25		25	ms
Cumulative clock low extend time (master device)	$T_{\text{LOW:MEXT}}$			10		10		10	ms
Clock/Data fall time	T_{F}			300		300		120	ns
Clock/Data rise time	T_{R}			1000		300		120	ns
Noise spike suppression time	T_{spike}				0	50	0	50	ns
Operational time after power-on reset	T_{POR}			500		500		500	ms

Figure 3-1. SMBus Signal Timing

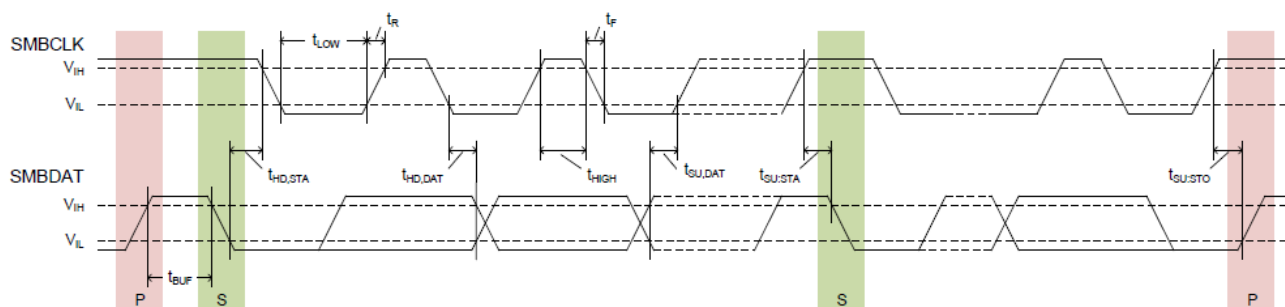

3.6 Analog Characteristics

3.6.1 A/D converter characteristics of R9A02G011GNP

($T_A = -40$ to $+105^\circ\text{C}$, $3.0\text{ V} \leq V_{DD} \leq 5.5\text{ V}$, $V_{SS} = 0\text{ V}$, Reference voltage (+) = V_{DD} , Reference voltage (–) = V_{SS})

Parameter	Symbol	Conditions		MIN.	TYP.	MAX.	Unit
Resolution	RES			8		10	bit
Overall error ^{Notes 1, 2}	AINL	10-bit resolution	$3.0\text{ V} \leq V_{DD} \leq 5.5\text{ V}$		1.2	± 7.0	LSB
Analog input voltage	V_{AIN}	ANI8 to ANI10		0		V_{DD}	V

3.6.2 A/D converter characteristics of R9A02G011GBG

($T_A = -40$ to $+90^\circ\text{C}$, $2.7\text{ V} \leq V_{DD} \leq 5.5\text{ V}$, $V_{SS} = 0\text{ V}$, Reference voltage (+) = V_{DD} , Reference voltage (–) = V_{SS})

Parameter	Symbol	Conditions		MIN.	TYP.	MAX.	Unit
Resolution	RES			8		10	bit
Overall error ^{Notes 1, 2}	AINL	10-bit resolution	$2.7\text{ V} \leq V_{DD} \leq 5.5\text{ V}$		1.2	± 7.0	LSB
Analog input voltage	V_{AIN}	ANI8 to ANI10		0		V_{DD}	V

Notes 1. Excludes quantization error ($\pm 1/2$ LSB).

2. This value is indicated as a ratio (%FSR) to the full-scale value.


3.6.3 POR circuit characteristics

R9A02G011GNP: ($T_A = -40$ to $+105^\circ\text{C}$, $V_{SS} = 0$ V)

R9A02G011GBG: ($T_A = -40$ to $+90^\circ\text{C}$, $V_{SS} = 0$ V)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Detection voltage	V_{POR}	Power supply rise time	1.43	1.51	1.59	V
	V_{PDR}	Power supply fall time	1.42	1.50	1.58	V
Minimum pulse width	T_{PW}		300			μs

Note Minimum time required for a POR reset when V_{DD} exceeds below V_{PDR} . This is also the minimum time required for a POR reset from when V_{DD} exceeds below 0.7 V to when V_{DD} exceeds V_{POR} while STOP mode is entered or the main system clock is stopped through setting bit 0 (HIOSTOP) and bit 7 (MSTOP) in the clock operation status control register (CSC).

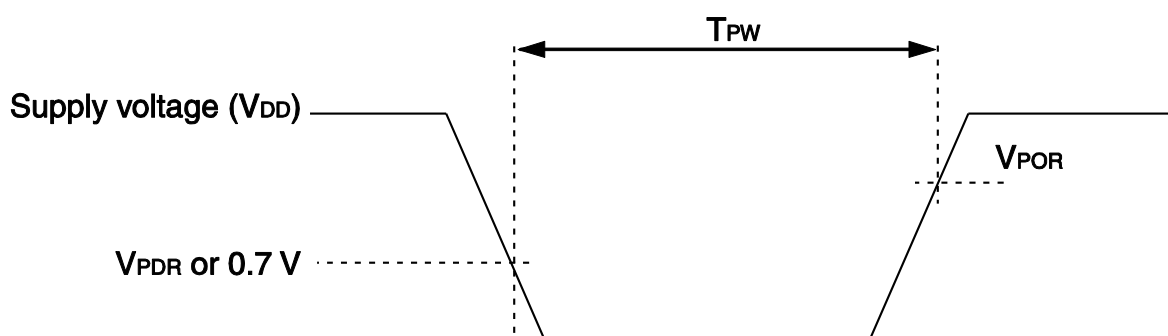

3.6.4 Power supply voltage rising slope characteristics

R9A02G011GNP: ($T_A = -40$ to $+105^\circ\text{C}$, $V_{SS} = 0$ V)

R9A02G011GBG: ($T_A = -40$ to $+90^\circ\text{C}$, $V_{SS} = 0$ V)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Power supply voltage rising slope	S_{VDD}				54	V/ms

Caution Make sure to keep the internal reset state by the LVD circuit or an external reset until V_{DD} reaches the operating voltage range.

3.6.5 CC-PHY characteristics

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
CC Current Source (Default)	I80u		64	80	96	μA
CC Current Source (1.5A)	I180u		166	180	194	μA
CC Current Source (3A)	I330u		304	330	356	μA
Transmitter Output Impedance	zDriver		33		75	Ω
Transmitter Rise Time	tRISE_TX		300			ns
Transmitter Fall Time	tFALL_TX		300			ns
Receiver Input Impedance	zBMCRX		1			MΩ

3.7 Flash Memory Programming Characteristics

3.7.1 Flash Memory Programming Characteristics of R9A02G011GNP

($T_A = -40$ to $+105^\circ\text{C}$, $3.0\text{ V} \leq V_{DD} \leq 5.5\text{ V}$, $V_{SS} = 0\text{ V}$)

Parameter	Symbol	Conditions		MIN.	TYP.	MAX.	Unit
System clock frequency	f_{CLK}	$3.0\text{ V} \leq V_{DD} \leq 5.5\text{ V}$		1		24	MHz
Number of code flash rewrites Notes 1,2,3	C_{erwr}	Retained for 20 years	$T_A = 85^\circ\text{C}$ Notes 4	1,000			Times

3.7.2 Flash Memory Programming Characteristics of R9A02G011GBG

($T_A = -40$ to $+90^\circ\text{C}$, $2.7\text{ V} \leq V_{DD} \leq 5.5\text{ V}$, $V_{SS} = 0\text{ V}$)

Parameter	Symbol	Conditions		MIN.	TYP.	MAX.	Unit
System clock frequency	f_{CLK}	$2.7\text{ V} \leq V_{DD} \leq 5.5\text{ V}$		1		24	MHz
Number of code flash rewrites Notes 1,2,3	C_{erwr}	Retained for 20 years	$T_A = 85^\circ\text{C}$ Notes 4	1,000			Times

- Notes**
- 1 erase + 1 write after the erase is regarded as 1 rewrite. The retaining years are until next rewrite after the rewrite.
 2. When using flash memory programmer and Renesas Electronics self-programming library.
 3. These are the characteristics of the flash memory and the results obtained from reliability testing by Renesas Electronics Corporation.
 4. This temperature is the average value at which data are retained.

3.8 Pin Capacitance

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
System Interface Pin capacitance	C_{SYS}				5	pF
I/O Port Pin capacitance	C_{IO}				5	pF

3.9 Power Consumption

3.9.1 Power Consumption for applications other than E-Marker

(T_A = 25° C, V_{DD} = 3.3 V, V_{SS} = 0 V)

Parameter	Conditions		TYP.	Unit
Operating current as Source role	Sink attached.	No PD Communication.	3.2	mA
		PD Communication.	4.1	mA
Operating current as Sink role	Source attached.	No PD Communication.	2.7	mA
		PD Communication.	3.6	mA
Supply current in sleep mode	Unplugged. SMBus, WAKEUP/INTP and CC enabled for wakeup. Source role.		205	μA
Supply current in deep sleep mode	Unplugged. SMBus and WAKEUP/INTP enabled for wakeup.		2.8	μA

(T_A = 25° C, V_{DD} = 5.0 V, V_{SS} = 0 V)

Parameter	Conditions		TYP.	Unit
Operating current as Source role	Sink attached.	No PD Communication.	3.9	mA
		PD Communication.	4.8	mA
Operating current as Sink role	Source attached.	No PD Communication.	3.4	mA
		PD Communication.	4.3	mA
Supply current in sleep mode	Unplugged. SMBus, WAKEUP/INTP and CC enabled for wakeup. Source role.		230	μA
Supply current in deep sleep mode	Unplugged. SMBus and WAKEUP/INTP enabled for wakeup.		3.2	μA

3.9.2 Power Consumption for E-Marker in a USB Type-C™ Cable

(T_A = 25° C, V_{DD} = 3.3 V, V_{SS} = 0 V)

Parameter	Conditions		TYP.	Unit
Operating current as Cable Plug	Attached between a Port Pair	No PD Communication	2.2	mA
		PD Communication	3.5	mA


(T_A = 25° C, V_{DD} = 5.0 V, V_{SS} = 0 V)

Parameter	Conditions		TYP.	Unit
Operating current as Cable Plug	Attached between a Port Pair	No PD Communication	2.5	mA
		PD Communication	4.0	mA

4. PACKAGE DRAWINGS


32-PIN QFN (5 x 5 mm)

JEITA Package code	RENESAS code	Previous code	MASS(TYP.)[g]
P-HVQFN32-5x5-0.50	PVQN0032KG-A	T32K8-50-BAP	0.07

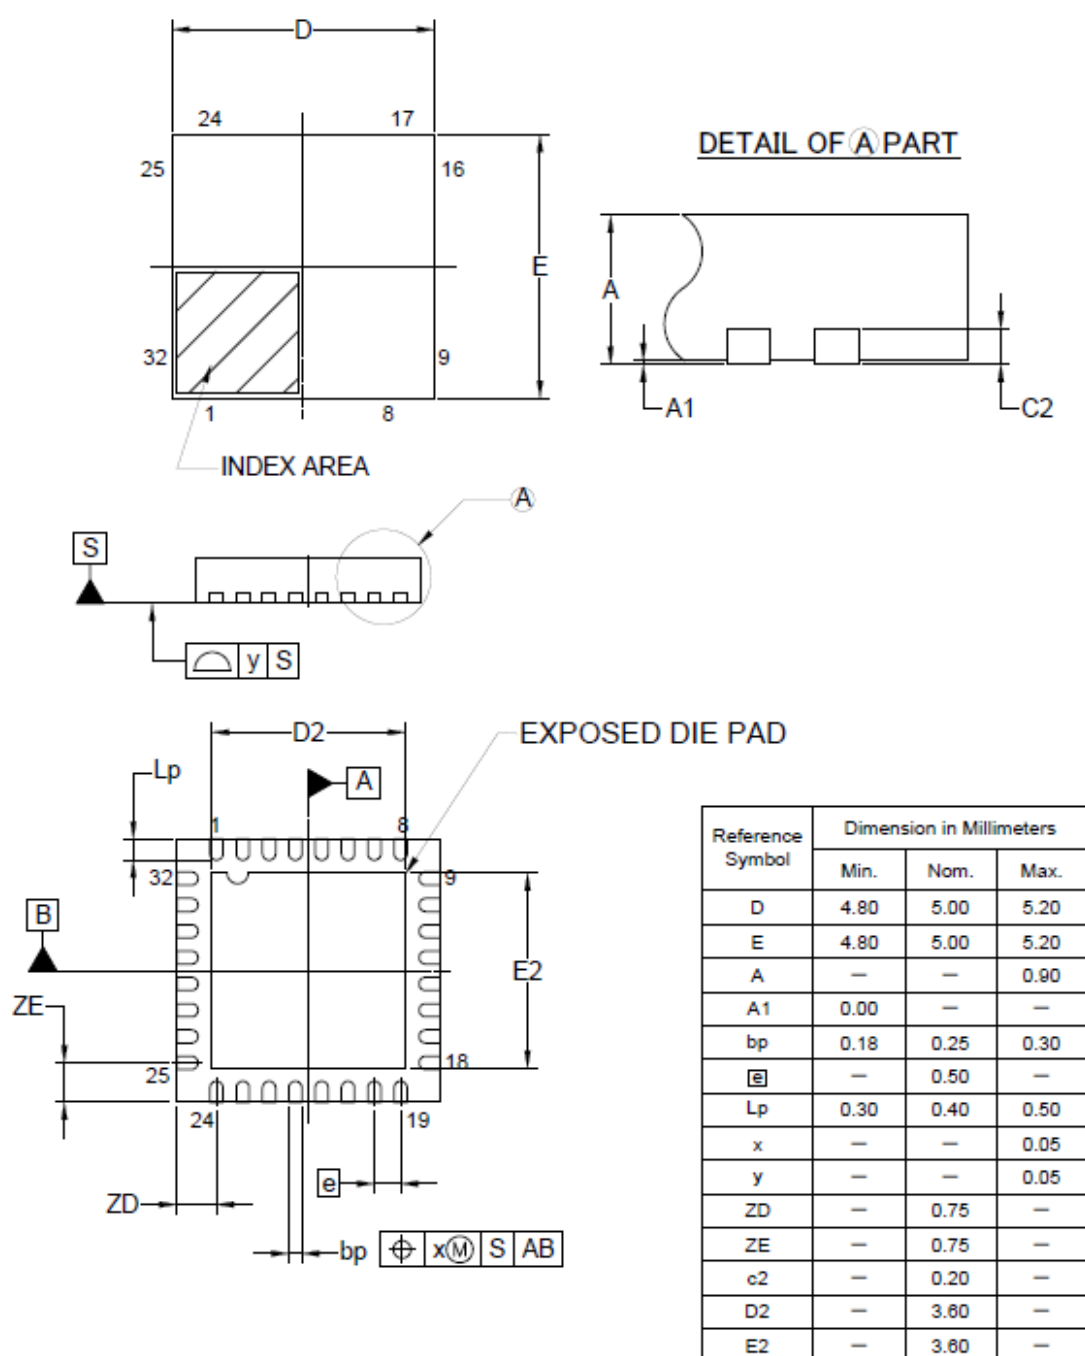

42-pin BGA (3.6 x 3.1 mm)

JEITA Package Code	RENESAS Code	MASS[Typ.]
P-VBGA42-3.6x3.1-0.40	PVBG0042LA-A	0.02g

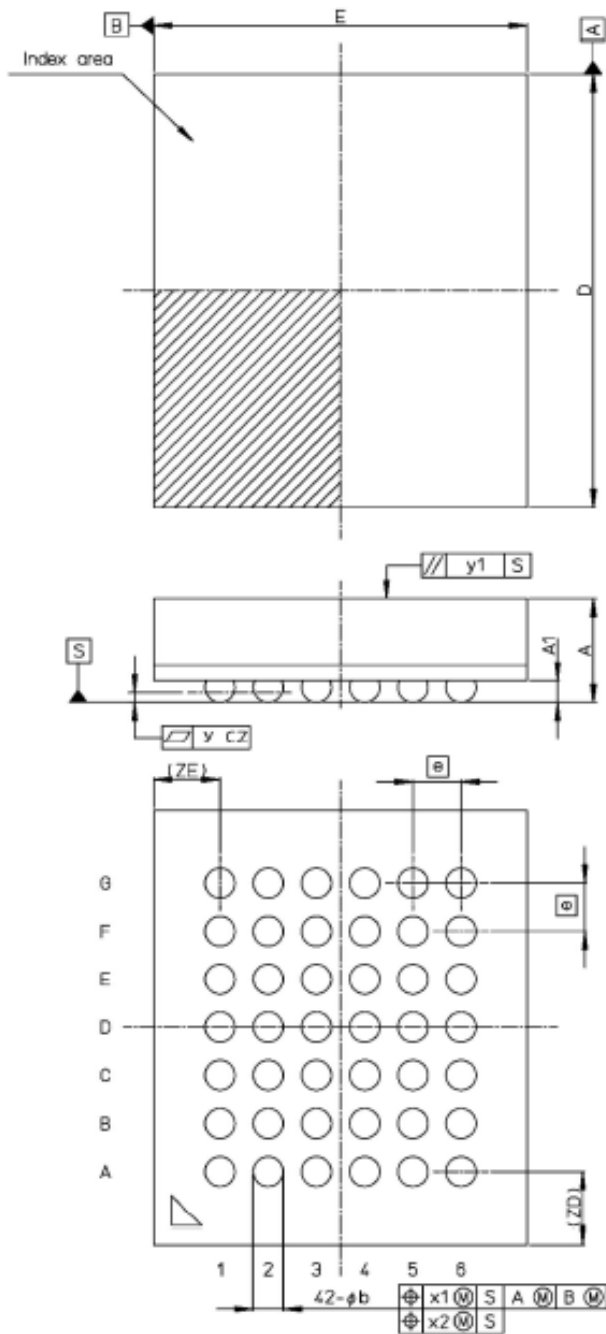

Reference Symbol	Dimension in Millimeters		
	Min	Nom	Max
D	3.5	3.6	3.7
E	3.0	3.1	3.2
A	—	—	1.00
A1	0.13	0.18	0.23
e	—	0.4	—
b	0.20	0.25	0.30
x1	—	—	0.15
x2	—	—	0.05
y	—	—	0.08
y1	—	—	0.20
ZD	—	0.60	—
ZE	—	0.55	—

Revision History	R9A02G011 Data Sheet
------------------	----------------------

Rev.	Date	Description	
		Page	Summary
1.0	Nov. 25, 2016	-	First Edition issued
1.01	Feb. 17, 2017	3	Updated Figure 1-2
		5	Updated section 2.4
		6	Updated section 2.5
1.02	Oct. 24, 2017	1	Updated section 1, section 1.1
		-	Corrected writing errors
1.10	Jan. 29, 2018	1	Updated section 1, section 1.1, section 1.3
		3	Updated section 1.5
		15	Updated section 3.6.2
		18	Updated section 3.9
		19	Updated section 4
1.20	Mar. 27, 2018	1	Updated section 1.1
1.30	Jan. 29, 2019	4-6	Updated section 2.4, section 2.6
2.00	Dec. 23, 2021	-	Completely revised with the addition of R9A02G011GBG.
		1	Updated section 1, section 1.1
2.10	Apr. 22, 2022	1	Updated section 1, section 1.1
2.20	Jan. 20, 2025	1-2	Updated section 1, section 1.1, section 1.4

SuperFlash(R) is a registered trademark of Silicon Storage Technology, Inc. in several countries including the United States and Japan.

NOTE) This product uses SuperFlash(R) technology licensed from Silicon Storage Technology, inc.

General Precautions in the Handling of Microprocessing Unit and Microcontroller Unit Products

The following usage notes are applicable to all Microprocessing unit and Microcontroller unit products from Renesas. For detailed usage notes on the products covered by this document, refer to the relevant sections of the document as well as any technical updates that have been issued for the products.

1. Precaution against Electrostatic Discharge (ESD)

A strong electrical field, when exposed to a CMOS device, can cause destruction of the gate oxide and ultimately degrade the device operation. Steps must be taken to stop the generation of static electricity as much as possible, and quickly dissipate it when it occurs. Environmental control must be adequate. When it is dry, a humidifier should be used. This is recommended to avoid using insulators that can easily build up static electricity. Semiconductor devices must be stored and transported in an anti-static container, static shielding bag or conductive material. All test and measurement tools including work benches and floors must be grounded. The operator must also be grounded using a wrist strap. Semiconductor devices must not be touched with bare hands. Similar precautions must be taken for printed circuit boards with mounted semiconductor devices.

2. Processing at power-on

The state of the product is undefined at the time when power is supplied. The states of internal circuits in the LSI are indeterminate and the states of register settings and pins are undefined at the time when power is supplied. In a finished product where the reset signal is applied to the external reset pin, the states of pins are not guaranteed from the time when power is supplied until the reset process is completed. In a similar way, the states of pins in a product that is reset by an on-chip power-on reset function are not guaranteed from the time when power is supplied until the power reaches the level at which resetting is specified.

3. Input of signal during power-off state

Do not input signals or an I/O pull-up power supply while the device is powered off. The current injection that results from input of such a signal or I/O pull-up power supply may cause malfunction and the abnormal current that passes in the device at this time may cause degradation of internal elements. Follow the guideline for input signal during power-off state as described in your product documentation.

4. Handling of unused pins

Handle unused pins in accordance with the directions given under handling of unused pins in the manual. The input pins of CMOS products are generally in the high-impedance state. In operation with an unused pin in the open-circuit state, extra electromagnetic noise is induced in the vicinity of the LSI, an associated shoot-through current flows internally, and malfunctions occur due to the false recognition of the pin state as an input signal become possible.

5. Clock signals

After applying a reset, only release the reset line after the operating clock signal becomes stable. When switching the clock signal during program execution, wait until the target clock signal is stabilized. When the clock signal is generated with an external resonator or from an external oscillator during a reset, ensure that the reset line is only released after full stabilization of the clock signal. Additionally, when switching to a clock signal produced with an external resonator or by an external oscillator while program execution is in progress, wait until the target clock signal is stable.

6. Voltage application waveform at input pin

Waveform distortion due to input noise or a reflected wave may cause malfunction. If the input of the CMOS device stays in the area between V_{IL} (Max.) and V_{IH} (Min.) due to noise, for example, the device may malfunction. Take care to prevent chattering noise from entering the device when the input level is fixed, and also in the transition period when the input level passes through the area between V_{IL} (Max.) and V_{IH} (Min.).

7. Prohibition of access to reserved addresses

Access to reserved addresses is prohibited. The reserved addresses are provided for possible future expansion of functions. Do not access these addresses as the correct operation of the LSI is not guaranteed.

8. Differences between products

Before changing from one product to another, for example to a product with a different part number, confirm that the change will not lead to problems. The characteristics of a microprocessing unit or microcontroller unit products in the same group but having a different part number might differ in terms of internal memory capacity, layout pattern, and other factors, which can affect the ranges of electrical characteristics, such as characteristic values, operating margins, immunity to noise, and amount of radiated noise. When changing to a product with a different part number, implement a system-evaluation test for the given product.

Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. Renesas Electronics disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, or information.
2. Renesas Electronics hereby expressly disclaims any warranties against and liability for infringement or any other claims involving patents, copyrights, or other intellectual property rights of third parties, by or arising from the use of Renesas Electronics products or technical information described in this document, including but not limited to, the product data, drawings, charts, programs, algorithms, and application examples.
3. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
4. You shall be responsible for determining what licenses are required from any third parties, and obtaining such licenses for the lawful import, export, manufacture, sales, utilization, distribution or other disposal of any products incorporating Renesas Electronics products, if required.
5. You shall not alter, modify, copy, or reverse engineer any Renesas Electronics product, whether in whole or in part. Renesas Electronics disclaims any and all liability for any losses or damages incurred by you or third parties arising from such alteration, modification, copying or reverse engineering.
6. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The intended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.

"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; industrial robots; etc.

"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control (traffic lights); large-scale communication equipment; key financial terminal systems; safety control equipment; etc.

Unless expressly designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not intended or authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems; surgical implantations; etc.), or may cause serious property damage (space system; undersea repeaters; nuclear power control systems; aircraft control systems; key plant systems; military equipment; etc.). Renesas Electronics disclaims any and all liability for any damages or losses incurred by you or any third parties arising from the use of any Renesas Electronics product that is inconsistent with any Renesas Electronics data sheet, user's manual or other Renesas Electronics document.

7. No semiconductor product is absolutely secure. Notwithstanding any security measures or features that may be implemented in Renesas Electronics hardware or software products, Renesas Electronics shall have absolutely no liability arising out of any vulnerability or security breach, including but not limited to any unauthorized access to or use of a Renesas Electronics product or a system that uses a Renesas Electronics product. RENESAS ELECTRONICS DOES NOT WARRANT OR GUARANTEE THAT RENESAS ELECTRONICS PRODUCTS, OR ANY SYSTEMS CREATED USING RENESAS ELECTRONICS PRODUCTS WILL BE INVULNERABLE OR FREE FROM CORRUPTION, ATTACK, VIRUSES, INTERFERENCE, HACKING, DATA LOSS OR THEFT, OR OTHER SECURITY INTRUSION ("Vulnerability Issues"). RENESAS ELECTRONICS DISCLAIMS ANY AND ALL RESPONSIBILITY OR LIABILITY ARISING FROM OR RELATED TO ANY VULNERABILITY ISSUES. FURTHERMORE, TO THE EXTENT PERMITTED BY APPLICABLE LAW, RENESAS ELECTRONICS DISCLAIMS ANY AND ALL WARRANTIES, EXPRESS OR IMPLIED, WITH RESPECT TO THIS DOCUMENT AND ANY RELATED OR ACCOMPANYING SOFTWARE OR HARDWARE, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY, OR FITNESS FOR A PARTICULAR PURPOSE.
8. When using Renesas Electronics products, refer to the latest product information (data sheets, user's manuals, application notes, "General Notes for Handling and Using Semiconductor Devices" in the reliability handbook, etc.), and ensure that usage conditions are within the ranges specified by Renesas Electronics with respect to maximum ratings, operating power supply voltage range, heat dissipation characteristics, installation, etc. Renesas Electronics disclaims any and all liability for any malfunctions, failure or accident arising out of the use of Renesas Electronics products outside of such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of Renesas Electronics products, semiconductor products have specific characteristics, such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Unless designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not subject to radiation resistance design. You are responsible for implementing safety measures to guard against the possibility of bodily injury, injury or damage caused by fire, and/or danger to the public in the event of a failure or malfunction of Renesas Electronics products, such as safety design for hardware and software, including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult and impractical, you are responsible for evaluating the safety of the final products or systems manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. You are responsible for carefully and sufficiently investigating applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive, and using Renesas Electronics products in compliance with all these applicable laws and regulations. Renesas Electronics disclaims any and all liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. Renesas Electronics products and technologies shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You shall comply with any applicable export control laws and regulations promulgated and administered by the governments of any countries asserting jurisdiction over the parties or transactions.
12. It is the responsibility of the buyer or distributor of Renesas Electronics products, or any other party who distributes, disposes of, or otherwise sells or transfers the product to a third party, to notify such third party in advance of the contents and conditions set forth in this document.
13. This document shall not be reprinted, reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
14. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products.

(Note1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its directly or indirectly controlled subsidiaries.

(Note2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

(Rev.5.0-1 October 2020)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,
Koto-ku, Tokyo 135-0061, Japan

www.renesas.com

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

Contact information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:
www.renesas.com/contact/.