




+ RELAYS, CONTACTORS & SWITCHES

HALF-SIZE RELAYS

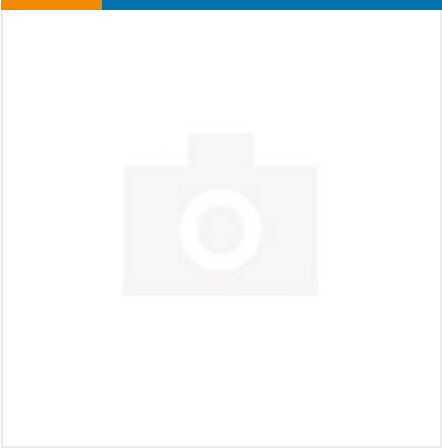

✓ Active

TE CONNECTIVITY (TE)
HFW1201F01M = M39016/6-123M
CII

HFW1201F01M
TE Internal Number: 2-1617030-1
Mil-Spec: M39016/6-123M

- Not EU RoHS Compliant
- Not EU ELV Compliant
- Contact Arrangement 2 Form C, DPDT, 2 C/O
- Input Voltage (VDC) 6
- Contact Current Rating (A) 2
- Coil Voltage Rating (VDC) 6
- Coil Resistance (Ω) 40

DOCUMENTATION

No documentation available.

FEATURES

Please review product documents or [contact us](#) for the latest agency approval information.

Product Type Features

- Coil Latching Without
- Product Type Relay
- MOSFET Driver Without
- Relay Type Military/Aerospace High Performance
- Enclosure Type Hermetically Sealed

Configuration Features

- Transistor Driver Without

Electrical Characteristics

Input Voltage (VDC) 6
Coil Voltage Rating (VDC) 6
Coil Resistance (Ω) 40
Coil Power Rating (DC) (mW) 900
Vibration 30G's, 10 – 3000Hz
Coil Polarity Protection Diode Without
Coil Power Measurement Milliwatts
Actuating System DC
Coil Suppression Diode Without
Shock 100G's, 6ms
Coil Magnetic System Non-Polarized, Monostable

Contact Features

Contact Arrangement 2 Form C, DPDT, 2 C/O
Contact Current Rating (A) 2

Termination Features

Termination Type PC Pins

Mechanical Attachment

Mounting Type Printed Circuit Board

Usage Conditions

Operating Temperature Range ($^{\circ}\text{C}$) -65 – 125

Statement of Compliance

Statement of Compliance
PDF