
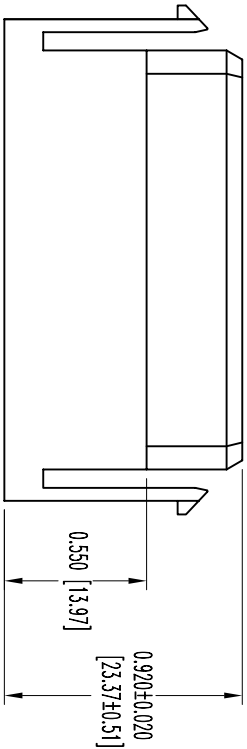


POSITRONIC INDUSTRIES RELEASES THE DATA ON THIS DRAWING TO BE RELIABLE SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE. THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION. POSITRONIC INDUSTRIES ASSUMES NO LIABILITY OR RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE/REV	REVISION RECORD	APP	DR	CK
1-28-02	NC	ECO	18893	RCM YK COLF
5-19-04	A	ECO	22443	YK

SK4146

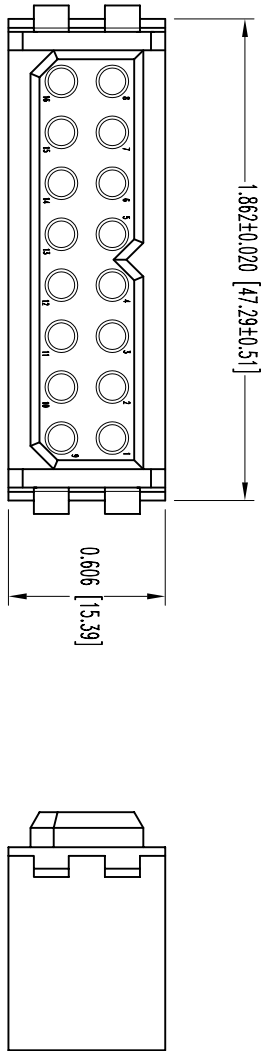

NOTES:

1. MATERIALS AND FINISHES:
INSULATOR: GLASS FILLED POLYESTER, UL 94V-0, COLOR BLUE.
2. ELECTRICAL CHARACTERISTICS:
INSULATION RESISTANCE: 5 G OHMS PER IEC 512-2, TEST 3a, METHOD A.
WORKING VOLTAGE: 600 VAC.
3. WORKING TEMPERATURE: -55°C TO +125°C.
4. DIMENSIONS ARE IN INCHES [MILLIMETERS].



POSITRONIC INDUSTRIES INC.
www.connectpositronic.com

DECIMAL TOL.	PCS SERIES	SCALE	DRAWN BY	APPROVED BY
± 0.015 [0.38]		N.T.S.	Y. KELLEYBREW	RCM
ANGULAR TOL.	TITLE	DATE	DRAWING NUMBER	REV.
$\pm 5^\circ$		1-28-02	SK4146	A