

Precision Potentiometer / Position Sensor

Features:

- Lead-free
- 7/8" diameter
- Single Turn
- Conductive Plastic



All parts are Pb-free and comply with EU Directive 2011/65/EU amended by (EU)2015/863

Applications:

- Pedal position
- Joystick controls
- Valve control
- Wind Vane
- Panel control
- Test and measurement
- Medical equipment
- Angular position

Model Styles Available

6181	1/8" shaft, 1/4" bushing
6184	6mm shaft, 3/8" bushing
6186	1/8" shaft, 3/8" bushing
6187	1/4" shaft, 3/8" bushing
6188 for side load applications	1/4" shaft, 3/8" bronze bushing

Electrical

Resistance range	1K to 100K Ω
Standard resistance tolerance	$\pm 10\%$
Minimum practical resistance tolerance	$\pm 5\%$
Independent linearity	$\pm 1\%$
Minimum practical independent linearity	$\pm 0.5\%$
Input voltage	400 VDC maximum, not to exceed power rating
Power rating	1.0 Watt at 70°C, derating to 0 at 125°C
Dielectric strength	750 Vrms
Insulation resistance	1,000 M Ω , minimum
Output smoothness	0.1% maximum
Actual electrical travel	340° nominal (300° with stop feature)
Electrical continuity travel	350° nominal (320° with stop feature)
End voltage	Maximum 0.5% of input voltage
Resolution	Essentially infinite
TCR	-400 ppm/°C typical
Temperature coefficient of output voltage	± 10 ppm/°C typical

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


Mechanical

Total Mechanical Travel	360° continuous (320° ±3° with stop feature)
Number of gangs	1 maximum
Weight	0.53 oz. nominal
Backlash	1° maximum
Static stop strength	40 oz.-in.
Panel nut tightening torque	25 lb.-in. maximum
Start/run torque	1.0 oz.-in.

Environmental (MIL-PRF-39023)

Operating temperature range	-40°C to +125°C dynamic -65°C to +125°C static
Temperature cycling	5 cycles, -65°C to +125°C, maximum 10% ΔR
Shock	6 ms Saw-tooth, 100 G's, 0.1 ms maximum discontinuity
Vibration	10 G's, 10 to 500 Hz, maximum 2% ΔR, 0.1 ms maximum discontinuity
Moisture resistance	Five 24 hour cycles, maximum 25% ΔR
High temperature exposure	1,000 hours at 125°C, maximum 0.5% ΔV _R
Rotational Life	5 million shaft revolutions (no sideload, 6188 up to 8 oz. sideload)
Rotational Load Life	5 million shaft revolutions, maximum 10% ΔR
Ingress protection rating (IP code)	IP50, IP66 available as option (feature code ES)

Ordering Information

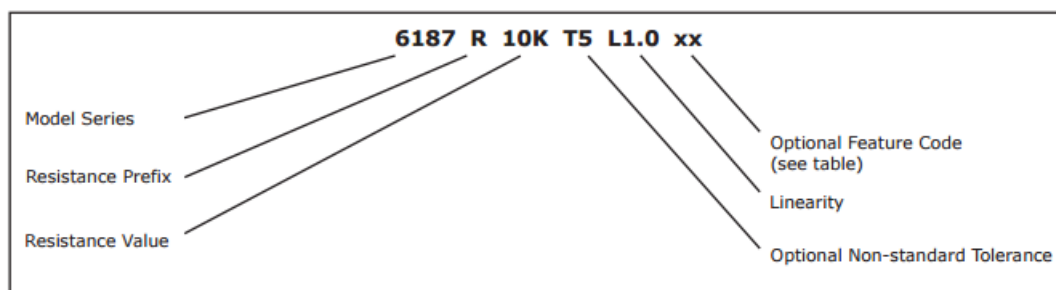

Feature Codes

Center Tap	CT
Linearity Taper Data Included	LT
Flatted Shaft, 6187 or 6188 only	FS
Shaft Lock, 6187 only	SL
Stop	ST
Seal (IP66) 6184, 6187, or 6188 only	ES

When multiple feature codes are used, the P/N shall be in the same sequence as listed in this table (top to bottom).


Standard Resistance Values

1K	2K	5K	10K	20K	50K	100K
----	----	----	-----	-----	-----	------

General Note


TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

Circuit Diagram

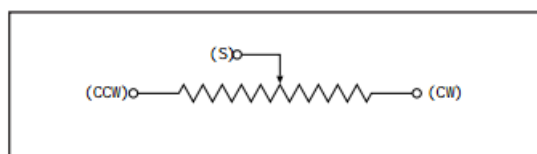


Outline Drawing


Model 6181

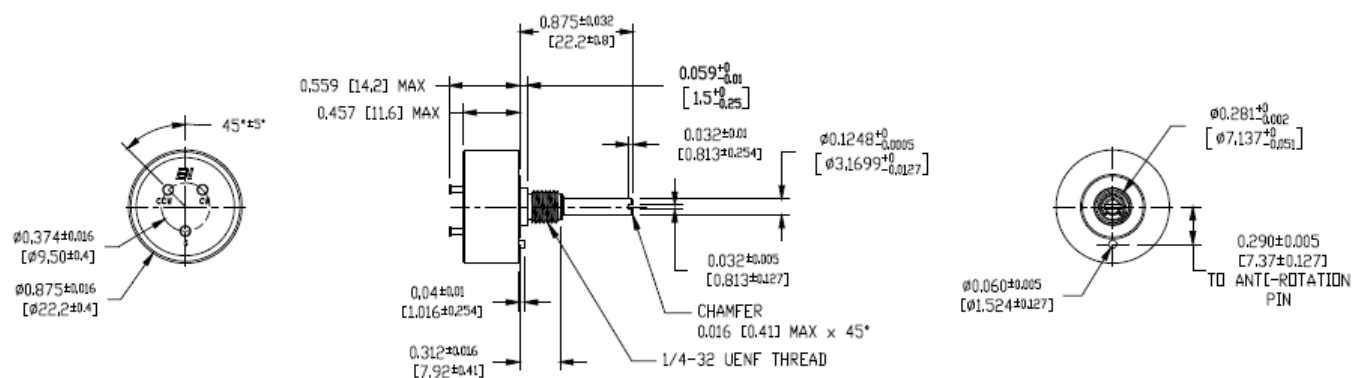

Model 6184

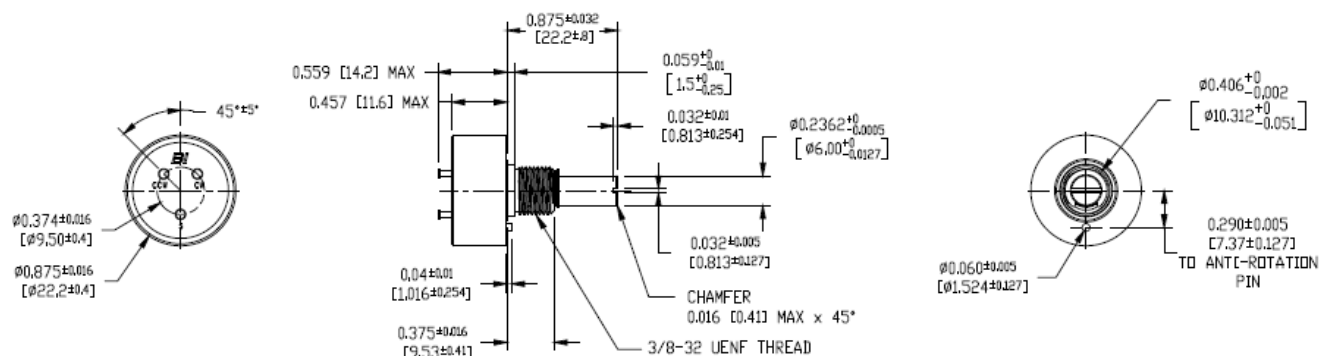

Model 6186

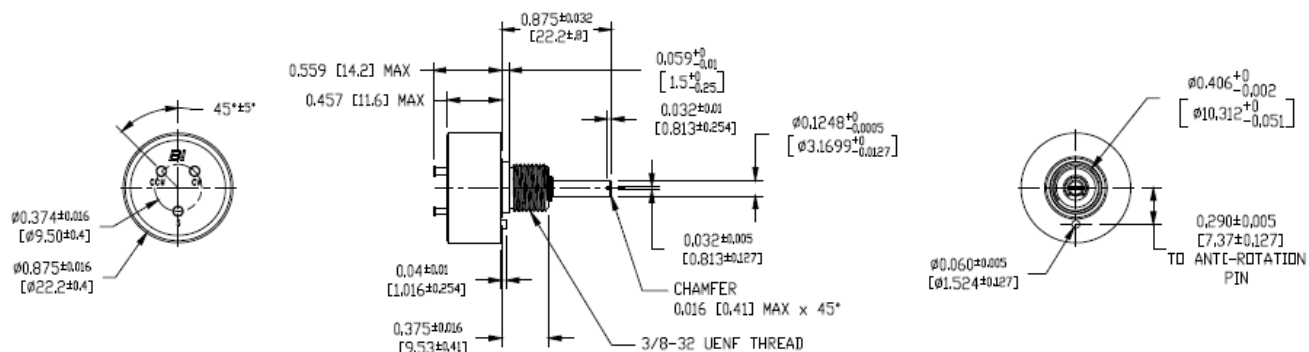

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


© TT Electronics plc

BI Technologies IRC Welwyn


www.ttelectronics.com/potentiometers
Issue E 03.26 Page 3

Outline Drawing

Model 6187 / 6188

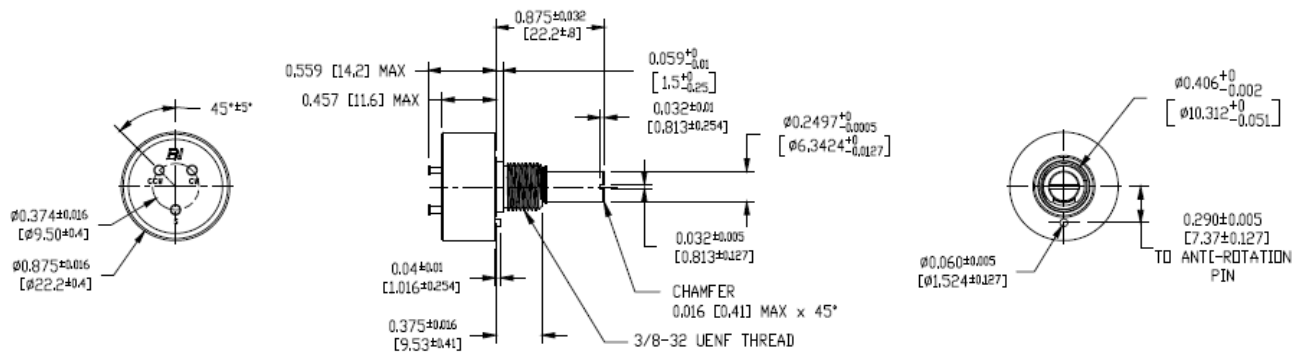

FS (Flatted Shaft) Option

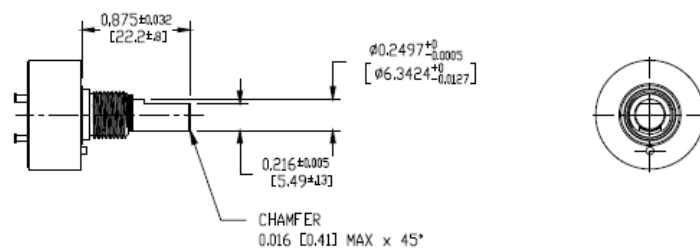

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.