



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN1350207	2013/05/16	Yulong	Change the Dimension
D	C200380	2020/03/30	JC Chen	Δ XI

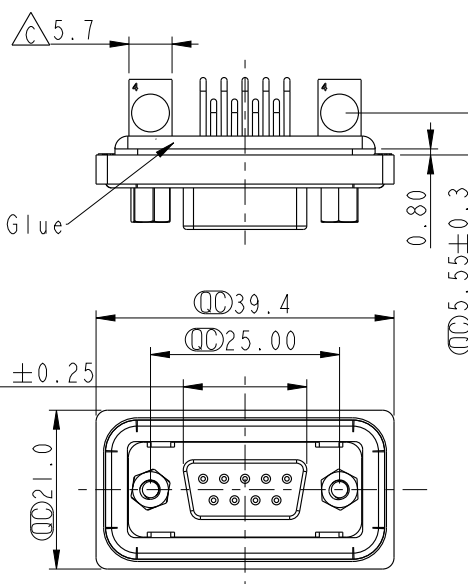


Note:

- * $\varnothing$ Important Dimension.
- * Waterproof Rate : IP68
IP68: 1M of depth of water 24 hours
(防水等級: IP68)
(IP68: 1米水深24小時)
- * Do Mating Test After Glued
點膠後, 須作對插測試
- * HD-SUB Conn. : Black Core, PBT
- * Plastic Jacket : Black, Nylon+GF
- * Pin: Copper Alloy, Gold Plated
- * Ring: Light Blue, Silicone
- * Screw: Copper Alloy, Nickel Plated, #4-40 UNC
- * The 90° Board Lock Needs To Connect The Iron Shell
L型支架需接鐵殼

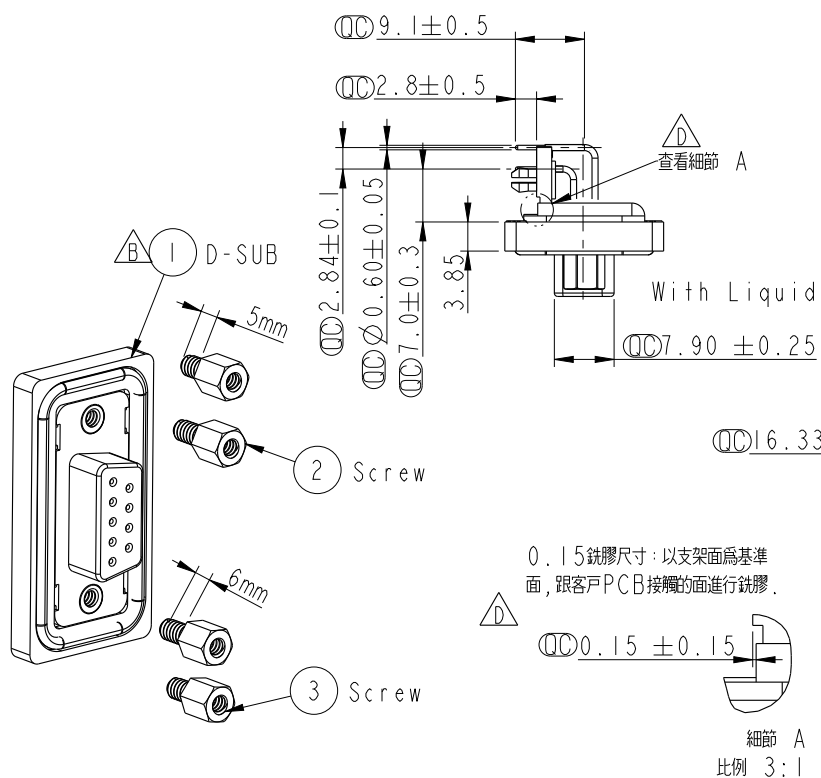

Screw L=5.0 For Panel Thickness
Under 1.2mm
適用板厚 1.2mm以下

Screw L=6.0 For Panel Thickness
Between 1.2~2.0mm
適用板厚 1.2~2.0mm以下

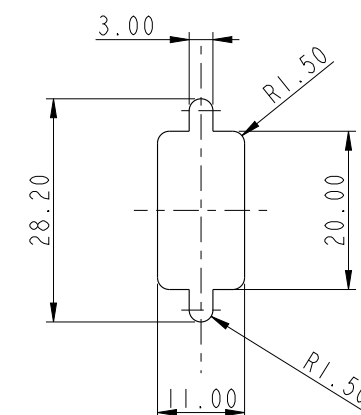

Recommended Panel Cut-Out
建議挖孔尺寸

9 Pin Female Connector
PCB Pin Layout

UNIT: mm		TITLE	DB9/F Conn, Panel, PCB 90° Add Board Lock
TOLERANCE		SCALE	1:1
.X	±0.25	SIZE	A4
.XX	±0.1	SHEET	1 OF 1
.XXX	±0.05	REV.	D
ANGLES	±1°	WC-REV.	A.4
			$\varnothing$: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	SDB-09PFFP-SB8001	DRAWN BY	Yulong_wang	DATE	2013/05/16
DWG NO	SDB-09PFFP-SB8001	CHECKED BY	Victor	DATE	2013/05/16
CUSTOMER	ALTW	APPROVED BY	Maslow	DATE	2013/05/16