
## UNCONTROLLED DOCUMENT


	PART	NUMBER	
SSL-L	X50	099IGW-	-02

 REV.
 E.C.N. NUMBER AND REVISION COMMENTS
 DATE

 A
 E.C.N. #11148
 11.06.06



ELECTRO-OPTICAL CHARACTE	RISTIC	S IA=25°C	If=20	mA	
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		635 (RED)		nm	
	565 (GREEN)		nm		
FORWARD VOLTAGE (R/G)		2.0/2.2	2.5/2.6	۷f	
reverse voltage	5.0			$V_r$	Ir=100µA
AXIAL INTENSITY (R/G)		55/45		mcd	lf=20mA
VIEWING ANGLE		60		2x theta	
EMITTED COLOR: RED/	CREEN				
EPOXY LENS FINISH: MILK	/ WHIT	E DIFFUSED			

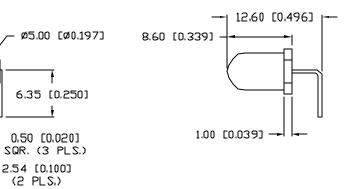

LIMITS OF SAFE OPERATION AT 25°C PER CHIP

DIENTRA ARTINAL OLIARIATERICTION T. ACIA

PARAMETER	CΩLORS	MAX	UNITS
PEAK FORWARD CURRENT*		150	mA
STEADY CURRENT	(R/G)	30/25	mΑ
POWER DISSIPATION		105	mW
DERATE FROM 25°C		-1.2	mW/⁺C
OPERATING, STORAGE TEMP.		-40 TO +85	Ċ
SOLDERING TEMP.		+ 260	<b>.</b> C
2.0mm FROM BODY			3 SEC. MAX

<sup>\*</sup> t<10µS



Pb

REV.

A SSL-LX5099IGW-02

COMMON CATHODE

T-5mm (T-1 3/4) LED,
RED/GREEN BI-COLOR, MILKY WHITE DIFFUSED LENS,
COMMON CATHODE, WITH BENT LEADS.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX NO. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLISSINE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTIE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT

SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.

PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com

US WEB: www.lumex.com.tw

DRAWN BY: CHECKED BY: APPROVED BY: DATE: 11.06.06

PAGE: 1 OF 1

JC SCALE: N/A

Ø5.90 [Ø0.232]