

LUMOTAST 75 IP65, signal lamps, rectangular collar, flat bezel,
Solder terminal

DISCONTINUED



Description

The LUMOTAST 75 IP 65 illuminated pushbuttons and signal lamps have been proven for decades and are the most successful monobloc pushbuttons in RAFI history. The versatile collar shapes in the classic design and the familiar connection and labeling concept make the LUMOTAST 75 IP 65 series your reliable component. These pushbuttons and signal lamps offer protection class IP 65 according to DIN.

technical data

> general

Collar shape	rectangular
Operating temperature, min.	-25 °C
Operating temperature, max.	55 °C
Storage temperature, min.	-40 °C
Storage temperature, max.	80 °C
illuminated	Yes
Lamp socket	T4.5
Packaging	Box
Packaging unit	10 pcs.
net weight	7.7 g
Degree of protection, front side, according to DIN EN 60529	IP65
Environment resistance	IEC 60068-2-14 IEC 60068-2-30 IEC 60068-2-33 IEC 60068-2-78
Minimum order quantity (MOQ)	20 pcs.
RoHS compliant	Yes
REACH compliant	Yes

direct links

> RAFI eCatalog

> mounting diameters

Outside dimension, length	25 mm
Outside dimension, width	19 mm
Mounting hole	16.2 mm
Mounting depth	33.5 mm
Installation height	10.5 mm

> mechanical data

Fixing	Threaded ring
Solderability	Yes
Terminal on the rear	Solder terminal


> electrical data

The information in this data sheet only contains general descriptions and / or performance features, which may not apply precisely as described to the respective application, and which may change due to further product enhancements. The technical data, illustrations and other information about our products are the mere results of individual technical testing. These descriptions and other product features are only binding if they expressly agreed upon at the time of the conclusion of a binding contract. In all other cases, we reserve the right to make technical changes as well as changes of availability. Pictures and other graphic illustrations are approximations only. All product names may be trademarks or brand names of the RAFI Group or any other sub-supplier of RAFI. The use of such by any third parties for their own purposes may infringe the rights of the respective entity holding those rights.
date: May 9, 2025 page: 1/3

Rated current, min. 0.05 A

drawings

Dimensioned drawing

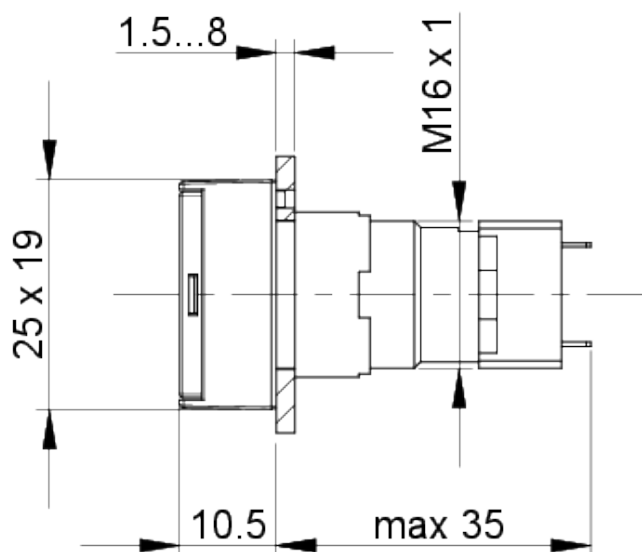

Mounting hole drawing

