
CGPT-6/2-2-SP Product Details

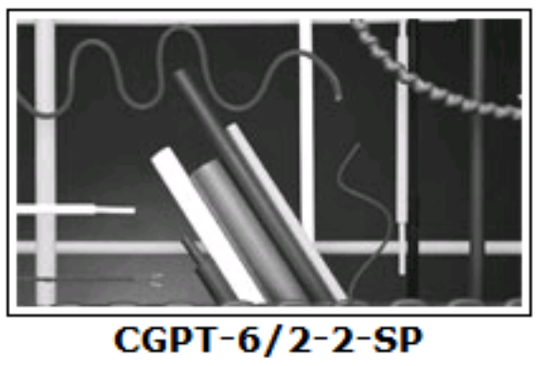

CGPT-6/2-2-SP

Heat Shrink Tubing

Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- Heat Shrinkable Tubing
- Product Name = CGPT
- Product Source = U.K.
- Flexible
- Thin Wall Style

View all Features

TE Internal Number: 6016734001

Active

Quick Links
- Pricing & Availability
- Search for Tooling
- Product Feature Selector
- Contact Us About This Product

Add to My Part List | Request Sample | Find Similar Products | Buy Product

Documentation & Additional Information

Product Drawings:
- None Available

Catalog Pages/Data Sheets:
- None Available

Product Specifications:
- None Available

Application Specifications:
- None Available

Instruction Sheets:
- None Available

CAD Files:
- None Available

Related Products:
- Tooling

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:
- Product Type = Heat Shrinkable Tubing
- Color = Red

Dimensions:
- Expanded ID, Min. (mm [in]) = 6.00 [0.236]
- Recovered ID, Max. (mm [in]) = 2.00 [0.079]

Body Features:
- Product Name = CGPT
- Pliancy = Flexible
- Wall Style = Thin
- Wall Type = Single
- Material = Crosslinked Polyolefin
- Shrink Ratio = 2:1
- Fluid Type = Brake Fluid, Chemicals/Solvents, Water
- Resistant To = Fluids, Mechanical Damage, Strain
- Wall Thickness - Full Recovery (Nominal) (mm [in]) = 0.64 [0.025]

Housing Features:
- Material Systems = No

Industry Standards:
- Government/Industry Qualification = No
- Flammability Rating Type = Flame-Retardant
- UL Rating = Recognized
- CSA Certified = Yes
- Approved Standards = CSA LR31929, UL E35586
- RoHS/ELV Compliance = RoHS compliant, ELV compliant
- Lead Free Solder Processes = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant

Environmental:
- Fluid Resistance = Splash Protection
- Operating Temperature (°C) = -40 – +135

Conditions for Usage:
- Full Recovery Temperature (°C) = 120
- Shrink Temperature, Min. (°C) = 80
- High Temperature Compatible = No

Operation/Application:
- Application = Cable Bundling, Cable Jacketing, Color Coding, Identification, Insulation and Protection
- Emission Free = No
- Product Use = Cables, Electronic Components, Pipes, Wires

Packaging Features:
- Packaging Method = Spool

Product Availability:
- Product Source = U.K.

Other:
- Brand = Raychem

© 2013 Tyco Electronics Corporation, a TE Connectivity Ltd. company. All Rights Reserved

Downloaded from Arrow.com.