APPROVAL SHEET

MULTILAYER CERAMIC CAPACITORS

Automotive Capacitors Series (MT)

Qualified to AEC-Q200

0201 to 1210 Sizes (6.3V to 1000V)

X8G, NP0, X7R & X6S Dielectrics

Halogen Free & RoHS Compliance

PASSIVE SYSTEM ALLIANCE
Walsin Technology Corporation
COPYRIGHT © WALSIN TECHNOLOGY CORPORATION. ALL RIGHTS RESERVED.

*Contents in this sheet are subject to change without prior notice.

Copyright © by Walsin Technology Corporation. | All rights reserved.
Downloaded from Arrow.com.

1. DESCRIPTION

MLCC consists of a conducting material and electrodes. To manufacture a chip-type SMT and achieve miniaturization, high density and high efficiency, ceramic condensers are used.

WTC's MT series MLCC is made by NP0,X7R,X6S dielectrics and which provides product with high electrical precision, stability and reliability. Besides, MT series MLCC is tighten controlling in quality in line to assure quality performance in automotive applications.

2. FEATURES

a. A wide selection of sizes is available (0201 to 0805).
b. High capacitance in given case size.
c. Capacitor with lead-free termination (pure Tin).
d. The MT series meet AEC-Q200 requirement.

3. APPLICATIONS

a. For Navigation & Information equipment's.
b. For entertainment equipment's
c. For comfortable equipment's.
d. For Automotive electronic equipment.

4. HOW TO ORDER

MT	15	S	105	K	6R3	C	T
Series	**Size**	**Dielectric**	**Capacitance**	**Tolerance**	**Rated voltage**	**Termination**	**Packaging style**
MT= Automotive safe concern (with AEC-Q200 qualification)	**03**=0201 (0603) **15**=0402 (1005) **18**=0603 (1608) **21**=0805 (2012) **31**=1206 (3216) **32**=1210 (3225)	**G**=X8G **N**=NP0 (C0G) **B**=X7R **S**=X6S	Two significant digits followed by no. of zeros. And R is in place of decimal point. eg.: 0R5=0.5pF 1R0=1.0pF 102=10x10^2 =1000pF	**A**=±0.05pF **B**=±0.1pF **C**=±0.25pF **D**=±0.5pF **F**=±1% **G**=±2% **J**=±5% **K**=±10% **M**=±20%	Two significant digits followed by no. of zeros. And R is in place of decimal point. **6R3**=6.3 VDC **100**=10 VDC **160**=16 VDC **250**=25 VDC **500**=50 VDC **101**=100 VDC **201**=200 VDC **251**=250 VDC **501**=500 VDC **631**=630 VDC **102**=1000 VDC **12E**=1250 VCD	**C**=Cu/Ni/Sn	**T**=7" reeled **G**=13" reeled

Copyright © by Walsin Technology Corporation. | All rights reserved.
Downloaded from Arrow.com.

5. EXTERNAL DIMENSIONS

Size Inch (mm)	L (mm)	W (mm)	T (mm)/Symbol		Remark	M_B (mm)
0201 (0603)	0.60±0.03	0.30±0.03	0.30±0.03	L	#	0.10~0.25
0402 (1005)	1.00±0.05	0.50±0.05	0.50±0.05	N	#	0.15~0.35
0603 (1608)	1.60±0.10	0.80±0.10	0.80±0.07	S		0.25~0.60
	1.60 +0.15/-0.10	0.80 +0.15/-0.10	0.80 +0.15/-0.10	X		
0805 (2012)	2.00±0.15	1.25±0.10	0.60±0.10	A		0.30~0.70
			0.80±0.10	B		
			1.25±0.10	D	#	
	2.00±0.20	1.25±0.20	1.25±0.20	I	#	
	2.00+0.25/-0.2#4					
1206 (3216)	3.20±0.15	1.60±0.15	0.80±0.10	B		0.25~1.00
			0.95±0.10	C		
			1.25±0.10	D	#	
	3.20±0.20		1.15±0.15	J	#	
		1.60±0.20	1.60±0.20	G	#	
	3.20+0.3/-0.1 3.30+0.3/-0.1#1	1.60+0.3/-0.1	1.60+0.30/-0.10	P	#	
1210 (3225)	3.20±0.30	2.50±0.20	0.95±0.10	C	#	0.50~1.00
			1.25±0.10	D	#	
	3.20±0.40	2.50±0.30	1.60±0.20	G	#	
			2.00±0.20	K	#	
	3.30±0.40#3		2.50±0.30	M	#	
	3.20±0.60#2	2.50±0.50**	2.50±0.50**			




Fig. 1 The outline of MLCC

Reflow soldering only is recommended.
#1 For 1206B274/100V;1206B275/25V&50V products.
#2 For 1210B474/200V & 250V
#3 For 1210N103/1250V
#4 For 0805B225/50V

6. GENERAL ELECTRICAL DATA*

Dielectric	X8G	NP0	X7R	X6S
Size	0201, 0402, 0603, 0805, 1206, 1210			
Capacitance range*	0.1pF to 0.015uF	0.1pF to 0.047uF	100pF to 10μF	1μF
Capacitance tolerance**	Cap≤5pF#1: A (±0.05pF), B (±0.1pF), C (±0.25pF) 5pF<Cap<10pF#1: A (±0.05pF),B (±0.1pF) , C (±0.25pF), D (±0.5pF) Cap≥10pF: F (±1%), G (±2%), J (±5%)		J (±5%), K (±10%), M (±20%)	K (±10%), M (±20%)
Rated voltage (WVDC)	10V, 16V, 25V, 50V, 100V	10V, 16V, 25V, 50V, 100V, 200V, 250, 500, 630, 1000 ,1250		6.3V
Operating temperature	-55 to +150°C	-55 to +125°C		-55 to +105°C
Capacitance characteristic	±30ppm/°C		±15%	±22%
Termination	Ni/Sn (lead-free termination)			

#1: X8G/NP0, 0.1pF product only provide B tolerance and 5pF<Cap<10pF products need to check with sales if it can supply A (±0.05pF).
* Measured at the condition of 30~70% related humidity.
X8G/NP0: Apply 1.0±0.2Vrms, 1.0MHz±10% for Cap≤1000pF and 1.0±0.2Vrms, 1.0kHz±10% for Cap>1000pF, 25°C at ambient temperature
X7R/X6S: Please refer to page 13 “Reliability test conditions and requirements” for detail.
** Preconditioning for Class II MLCC: Perform a heat treatment at 150±10°C for 1 hour, then leave in ambient condition for 24±2 hours before measurement.

Copyright © by Walsin Technology Corporation. | All rights reserved.
Downloaded from Arrow.com.

7. CAPACITANCE RANGE

X8G Dielectric

DIELECTRIC		X8G													
SIZE		0402				0603					0805				
RATED VOLTAGE (VDC)		10	16	25	50	10	16	25	50	100	10	16	25	50	100
Capacitance	0.1pF (0R1)	N	N	N	N										
	0.2pF (0R2)	N	N	N	N										
	0.3pF (0R3)	N	N	N	N										
	0.4pF (0R4)	N	N	N	N										
	0.5pF (0R5)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	1.0pF (1R0)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	1.2pF (1R2)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	1.5pF (1R5)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	1.8pF (1R8)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	2.0pF (2R0)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	2.2pF (2R2)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	2.7pF (2R7)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	3.0pF (3R0)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	3.3pF (3R3)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	3.9pF (3R9)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	4.0pF (4R0)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	4.7pF (4R7)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	5.0pF (5R0)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	5.6pF (5R6)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	6.0pF (6R0)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	6.8pF (6R8)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	7.0pF (7R0)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	8.0pF (8R0)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	8.2pF (8R2)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	9.0pF (9R0)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	10pF (100)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	12pF (120)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	15pF (150)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	18pF (180)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	22pF (220)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	27pF (270)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	33pF (330)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	39pF (390)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	47pF (470)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	56pF (560)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	68pF (680)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	82pF (820)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	100pF (101)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	120pF (121)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	150pF (151)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	180pF (181)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	220pF (221)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	270pF (271)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	330pF (331)	N	N	N	N	S	S	S	S	S	A	A	A	A	A
	390pF (391)	N	N	N	N	S	S	S	S	S	B	B	B	B	B
	470pF (471)	N	N	N	N	S	S	S	S	S	B	B	B	B	B
	560pF (561)	N	N	N	N	S	S	S	S	S	B	B	B	B	B
	680pF (681)	N	N	N	N	S	S	S	S	S	B	B	B	B	B
	820pF (821)	N	N	N	N	S	S	S	S	S	B	B	B	B	B
	1,000pF (102)	N	N	N	N	S	S	S	S	S	B	B	B	B	B
	1,200pF (122)					X	X	X	X		B	B	B	B	B
	1,500pF (152)					X	X	X	X		B	B	B	B	B
	1,800pF (182)					X	X	X	X		B	B	B	B	B
	2,200pF (222)					X	X	X	X		B	B	B	B	B
	2,700pF (272)					X	X	X	X		D	D	D	D	D
	3,300pF (332)					X	X	X	X		D	D	D	D	D
	3,900pF (392)										D	D	D	D	D
	4,700pF (472)										D	D	D	D	D
	5,600pF (562)										D	D	D	D	
	6,800pF (682)										D	D	D	D	
	8,200pF (822)										D	D	D	D	
	0.010uF (103)										D	D	D	D	

* X8G: 0.1pF product only provide B tolerance
1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

Copyright © by Walsin Technology Corporation. | All rights reserved.
Downloaded from Arrow.com.

X8G Dielectric

DIELECTRIC		X8G								
SIZE		1206				1210				
RATED VOLTAGE (VDC)		10	16	25	50	10	16	25	50	100
Capacitance	1.0pF (1R0)									
	1.2pF (1R2)	B	B	B	B					
	1.5pF (1R5)	B	B	B	B					
	1.8pF (1R8)	B	B	B	B					
	2.0pF (2R0)	B	B	B	B					
	2.2pF (2R2)	B	B	B	B					
	2.7pF (2R7)	B	B	B	B					
	3.0pF (3R0)	B	B	B	B					
	3.3pF (3R3)	B	B	B	B					
	3.9pF (3R9)	B	B	B	B					
	4.0pF (4R0)	B	B	B	B					
	4.7pF (4R7)	B	B	B	B					
	5.0pF (5R0)	B	B	B	B					
	5.6pF (5R6)	B	B	B	B					
	6.0pF (6R0)	B	B	B	B					
	6.8pF (6R8)	B	B	B	B					
	7.0pF (7R0)	B	B	B	B					
	8.0pF (8R0)	B	B	B	B					
	8.2pF (8R2)	B	B	B	B					
	9.0pF (9R0)	B	B	B	B					
	10pF (100)	B	B	B	B	C	C	C	C	C
	12pF (120)	B	B	B	B	C	C	C	C	C
	15pF (150)	B	B	B	B	C	C	C	C	C
	18pF (180)	B	B	B	B	C	C	C	C	C
	22pF (220)	B	B	B	B	C	C	C	C	C
	27pF (270)	B	B	B	B	C	C	C	C	C
	33pF (330)	B	B	B	B	C	C	C	C	C
	39pF (390)	B	B	B	B	C	C	C	C	C
	47pF (470)	B	B	B	B	C	C	C	C	C
	56pF (560)	B	B	B	B	C	C	C	C	C
	68pF (680)	B	B	B	B	C	C	C	C	C
	82pF (820)	B	B	B	B	C	C	C	C	C
	100pF (101)	B	B	B	B	C	C	C	C	C
	120pF (121)	B	B	B	B	C	C	C	C	C
	150pF (151)	B	B	B	B	C	C	C	C	C
	180pF (181)	B	B	B	B	C	C	C	C	C
	220pF (221)	B	B	B	B	C	C	C	C	C
	270pF (271)	B	B	B	B	C	C	C	C	C
	330pF (331)	B	B	B	B	C	C	C	C	C
	390pF (391)	B	B	B	B	C	C	C	C	C
	470pF (471)	B	B	B	B	C	C	C	C	C
	560pF (561)	B	B	B	B	C	C	C	C	C
	680pF (681)	B	B	B	B	C	C	C	C	C
	820pF (821)	B	B	B	B	C	C	C	C	C
	1,000pF (102)	B	B	B	B	C	C	C	C	C
	1,200pF (122)	B	B	B	B	C	C	C	C	C
	1,500pF (152)	B	B	B	B	C	C	C	C	C
	1,800pF (182)	B	B	B	B	C	C	C	C	C
	2,200pF (222)	B	B	B	B	C	C	C	C	C
	2,700pF (272)	B	B	B	B	C	C	C	C	C
	3,300pF (332)	B	B	B	B	C	C	C	C	C
	3,900pF (392)	B	B	B	B	C	C	C	C	C
	4,700pF (472)	B	B	B	B	C	C	C	C	C
	5,600pF (562)	B	B	B	B	C	C	C	C	C
	6,800pF (682)	C	C	C	C	C	C	C	C	C
	8,200pF (822)	D	D	D	D	C	C	C	C	C
	0.010μF (103)	D	D	D	D	C	C	C	C	C
	0.012μF (123)					D	D	D	D	D
	0.015μF (153)					D	D	D	D	D

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

Copyright © by Walsin Technology Corporation. | All rights reserved.
Downloaded from Arrow.com.

NP0 Dielectric

DIELECTRIC		NP0																
SIZE		0201					0402					0603						
RATED VOLTAGE		10	16	25	50	100	10	16	25	50	100	10	16	25	50	100	200	250
Capacitance	0.1pF (0R1)	L	L	L	L	L	N	N	N	N	N							
	0.2pF (0R2)	L	L	L	L	L	N	N	N	N	N							
	0.3pF (0R3)	L	L	L	L	L	N	N	N	N	N							
	0.4pF (0R4)	L	L	L	L	L	N	N	N	N	N							
	0.5pF (0R5)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	0.6pF (0R6)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	0.7pF (0R7)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	0.8pF (0R8)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	0.9pF (0R9)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	1.0pF (1R0)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	1.2pF (1R2)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	1.5pF (1R5)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	1.8pF (1R8)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	2.0pF (2R0)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	2.2pF (2R2)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	2.7pF (2R7)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	3.0pF (3R0)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	3.3pF (3R3)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	3.9pF (3R9)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	4.0pF (4R0)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	4.7pF (4R7)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	5.0pF (5R0)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	5.6pF (5R6)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	6.0pF (6R0)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	6.8pF (6R8)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	7.0pF (7R0)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	8.0pF (8R0)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	8.2pF (8R2)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	9.0pF (9R0)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	10pF (100)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	12pF (120)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	15pF (150)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	18pF (180)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	22pF (220)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	27pF (270)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	33pF (330)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	39pF (390)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	47pF (470)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	56pF (560)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	68pF (680)	L	L	L	L		N	N	N	N	N	S	S	S	S	S	S	S
	82pF (820)	L	L	L	L		N	N	N	N	N	S	S	S	S	S	S	S
	100pF (101)	L	L	L	L		N	N	N	N	N	S	S	S	S	S	S	S
	120pF (121)	L	L	L	L		N	N	N	N	N	S	S	S	S	S	S	S
	150pF (151)						N	N	N	N	N	S	S	S	S	S	S	S
	180pF (181)						N	N	N	N	N	S	S	S	S	S	S	S
	220pF (221)						N	N	N	N	N	S	S	S	S	S	S	S
	270pF (271)						N	N	N	N		S	S	S	S	S	X	X
	330pF (331)						N	N	N	N		S	S	S	S	S	X	X
	390pF (391)						N	N	N	N		S	S	S	S	S	X	X
	470pF (471)						N	N	N	N		S	S	S	S	S	X	X
	560pF (561)						N	N	N	N		S	S	S	S	S	X	X
	680pF (681)						N	N	N	N		S	S	S	S	S	X	X
	820pF (821)						N	N	N	N		S	S	S	S	S	X	X
	1,000pF (102)						N	N	N	N		S	S	S	S	S	X	X
	1,200pF (122)											X	X	X	X	X	X	X
	1,500pF (152)											X	X	X	X	X	X	X
	1,800pF (182)											X	X	X	X	X	X	X
	2,200pF (222)											X	X	X	X	X		
	2,700pF (272)											X	X	X	X	X		
	3,300pF (332)											X	X	X	X	X		
	3,900pF (392)											X	X	X	X	X		
	4,700pF (472)											X	X	X	X	X		
	5,600pF (562)											X	X	X	X	X		
	6,800pF (682)											X	X	X	X	X		
	8,200pF (822)											X	X	X	X	X		
	0.01μF (103)											X	X	X	X	X		

* NP0, 0.1pF product only provide B tolerance.

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

Copyright © by Walsin Technology Corporation. | All rights reserved.

Downloaded from Arrow.com.

NP0 Dielectric

DIELECTRIC		NP0								
SIZE		0805								
RATED VOLTAGE		10	16	25	50	100	200	250	500	630
Capacitance	0.5pF (0R5)	A	A	A	A	A	A	A	A	A
	0.6pF (0R6)	A	A	A	A	A	A	A	A	A
	0.7pF (0R7)	A	A	A	A	A	A	A	A	A
	0.8pF (0R8)	A	A	A	A	A	A	A	A	A
	0.9pF (0R9)	A	A	A	A	A	A	A	A	A
	1.0pF (1R0)	A	A	A	A	A	A	A	A	A
	1.2pF (1R2)	A	A	A	A	A	A	A	A	A
	1.5pF (1R5)	A	A	A	A	A	A	A	A	A
	1.8pF (1R8)	A	A	A	A	A	A	A	A	A
	2.2pF (2R2)	A	A	A	A	A	A	A	A	A
	2.7pF (2R7)	A	A	A	A	A	A	A	A	A
	3.3pF (3R3)	A	A	A	A	A	A	A	A	A
	3.9pF (3R9)	A	A	A	A	A	A	A	A	A
	4.7pF (4R7)	A	A	A	A	A	A	A	A	A
	5.6pF (5R6)	A	A	A	A	A	A	A	A	A
	6.8pF (6R8)	A	A	A	A	A	A	A	A	A
	8.2pF (8R2)	A	A	A	A	A	A	A	A	A
	10pF (100)	A	A	A	A	A	A	A	A	A
	12pF (120)	A	A	A	A	A	A	A	A	A
	15pF (150)	A	A	A	A	A	A	A	A	A
	18pF (180)	A	A	A	A	A	A	A	A	A
	22pF (220)	A	A	A	A	A	A	A	A	A
	27pF (270)	A	A	A	A	A	A	A	A	A
	33pF (330)	A	A	A	A	A	A	A	A	A
	39pF (390)	A	A	A	A	A	A	A	A	A
	47pF (470)	A	A	A	A	A	A	A	A	A
	56pF (560)	A	A	A	A	A	A	A	A	A
	68pF (680)	A	A	A	A	A	A	A	A	A
	82pF (820)	A	A	A	A	A	A	A	B	B
	100pF (101)	A	A	A	A	A	B	B	B	B
	120pF (121)	A	A	A	A	A	B	B	D	D
	150pF (151)	A	A	A	A	A	D	D	D	D
	180pF (181)	A	A	A	A	A	D	D	D	D
	220pF (221)	A	A	A	A	A	D	D	D	D
	270pF (271)	A	A	A	A	A	D	D	D	D
	330pF (331)	A	A	A	A	A	D	D	D	D
	390pF (391)	B	B	B	B	B	D	D	D	D
	470pF (471)	B	B	B	B	B	D	D	I	I
	560pF (561)	B	B	B	B	B	D	D	I	I
	680pF (681)	B	B	B	B	B	D	D	I	I
	820pF (821)	B	B	B	B	B	D	D	I	I
	1,000pF (102)	B	B	B	B	B	D	D	I	I
	1,200pF (122)	B	B	B	B	B	D	D	I	I
	1,500pF (152)	B	B	B	B	B	D	D	I	I
	1,800pF (182)	B	B	B	B	B	D	D	I	I
	2,200pF (222)	B	B	B	B	B	D	D	I	I
	2,700pF (272)	D	D	D	D	D	I	I		
	3,300pF (332)	D	D	D	D	D	I	I		
	3,900pF (392)	D	D	D	D	D	I	I		
	4,700pF (472)	D	D	D	D	D	I	I		
	5,600pF (562)	D	D	D	D	D				
	6,800pF (682)	D	D	D	D	D				
	8,200pF (822)	D	D	D	D	D				
	0.01μF (103)	D	D	D	D	D				
	0.012μF (123)	D	D	D	D	D				
	0.015μF (153)	D	D	D	D	D				
	0.018μF (183)	D	D	D	D	D				
	0.022μF (223)	D	D	D	D	D				

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

Copyright © by Walsin Technology Corporation. | All rights reserved.
Downloaded from Arrow.com.

NP0 Dielectric

DIELECTRIC		NP0									
SIZE		1206									
RATED VOLTAGE		10	16	25	50	100	200	250	500	630	1000
Capacitance	1.0pF (1R0)										
	1.2pF (1R2)	B	B	B	B	B	B	B	B	B	
	1.5pF (1R5)	B	B	B	B	B	B	B	B	B	B
	1.8pF (1R8)	B	B	B	B	B	B	B	B	B	B
	2.2pF (2R2)	B	B	B	B	B	B	B	B	B	B
	2.7pF (2R7)	B	B	B	B	B	B	B	B	B	B
	3.3pF (3R3)	B	B	B	B	B	B	B	B	B	B
	3.9pF (3R9)	B	B	B	B	B	B	B	B	B	B
	4.7pF (4R7)	B	B	B	B	B	B	B	B	B	B
	5.6pF (5R6)	B	B	B	B	B	B	B	B	B	B
	6.8pF (6R8)	B	B	B	B	B	B	B	B	B	B
	8.2pF (8R2)	B	B	B	B	B	B	B	B	B	B
	10pF (100)	B	B	B	B	B	B	B	B	B	B
	12pF (120)	B	B	B	B	B	B	B	B	B	B
	15pF (150)	B	B	B	B	B	B	B	B	B	B
	18pF (180)	B	B	B	B	B	B	B	B	B	B
	22pF (220)	B	B	B	B	B	B	B	B	B	D
	27pF (270)	B	B	B	B	B	B	B	B	B	D
	33pF (330)	B	B	B	B	B	B	B	B	B	D
	39pF (390)	B	B	B	B	B	B	B	B	B	D
	47pF (470)	B	B	B	B	B	B	B	B	B	D
	56pF (560)	B	B	B	B	B	B	B	B	B	D
	68pF (680)	B	B	B	B	B	B	B	B	B	D
	82pF (820)	B	B	B	B	B	B	B	B	B	D
	100pF (101)	B	B	B	B	B	B	B	B	B	D
	120pF (121)	B	B	B	B	B	B	B	B	B	D
	150pF (151)	B	B	B	B	B	B	B	B	B	D
	180pF (181)	B	B	B	B	B	B	B	B	B	G
	220pF (221)	B	B	B	B	B	B	B	B	B	G
	270pF (271)	B	B	B	B	B	B	C	C	C	G
	330pF (331)	B	B	B	B	B	B	C	C	C	G
	390pF (391)	B	B	B	B	B	B	C	C	C	G
	470pF (471)	B	B	B	B	B	C	C	C	C	G
	560pF (561)	B	B	B	B	B	C	D	D	D	G
	680pF (681)	B	B	B	B	B	C	D	D	D	G
	820pF (821)	B	B	B	B	B	C	G	G	G	G
	1,000pF (102)	B	B	B	B	B	C	G	G	G	G
	1,200pF (122)	B	B	B	B	B	C	G	G	G	
	1,500pF (152)	B	B	B	B	B	D	G	G	G	
	1,800pF (182)	B	B	B	B	B	D	G	G	G	
	2,200pF (222)	B	B	B	B	B	D	G	G	G	
	2,700pF (272)	B	B	B	B	B	D	G	G	G	
	3,300pF (332)	B	B	B	B	B	D	G	G	G	
	3,900pF (392)	B	B	B	B	B	D	G	G	G	
	4,700pF (472)	B	B	B	B	B	D	G	G	G	
	5,600pF (562)	B	B	B	B	B	G	G	G	G	
	6,800pF (682)	C	C	C	C	C	G	G	G	G	
	8,200pF (822)	D	D	D	D	D	G	G	G	G	
	0.01μF (103)	D	D	D	D	D	G	G	G	G	

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

Copyright © by Walsin Technology Corporation. | All rights reserved.
Downloaded from Arrow.com.

NP0 Dielectric

DIELECTRIC		NP0										
SIZE		1210										
RATED VOLTAGE		10	16	25	50	100	200	250	500	630	1000	1250
Capacitance	10pF (100)	C	C	C	C	C	C	C	C	C	C	
	12pF (120)	C	C	C	C	C	C	C	C	C	C	
	15pF (150)	C	C	C	C	C	C	C	C	C	C	
	18pF (180)	C	C	C	C	C	C	C	C	C	C	
	22pF (220)	C	C	C	C	C	C	C	C	C	C	
	27pF (270)	C	C	C	C	C	C	C	C	C	C	
	33pF (330)	C	C	C	C	C	C	C	C	C	C	
	39pF (390)	C	C	C	C	C	C	C	C	C	C	
	47pF (470)	C	C	C	C	C	C	C	C	C	C	
	56pF (560)	C	C	C	C	C	C	C	C	C	C	
	68pF (680)	C	C	C	C	C	C	C	C	C	C	
	82pF (820)	C	C	C	C	C	C	C	C	C	C	
	100pF (101)	C	C	C	C	C	C	C	C	C	D	
	120pF (121)	C	C	C	C	C	C	C	C	C	D	
	150pF (151)	C	C	C	C	C	C	C	C	C	D	
	180pF (181)	C	C	C	C	C	C	C	C	C	D	
	220pF (221)	C	C	C	C	C	C	C	C	C	G	
	270pF (271)	C	C	C	C	C	C	C	C	C	G	
	330pF (331)	C	C	C	C	C	C	C	C	C	G	
	390pF (391)	C	C	C	C	C	C	C	C	C	G	
	470pF (471)	C	C	C	C	C	C	C	C	C	G	
	560pF (561)	C	C	C	C	C	C	C	C	C	G	
	680pF (681)	C	C	C	C	C	C	C	C	C	G	
	820pF (821)	C	C	C	C	C	C	C	C	C	G	
	1,000pF (102)	C	C	C	C	C	D	D	D	D	G	
	1,200pF (122)	C	C	C	C	C	D	D	D	D	K	
	1,500pF (152)	C	C	C	C	C	D	D	D	D	K	
	1,800pF (182)	C	C	C	C	C	D	D	D	D	K	
	2,200pF (222)	C	C	C	C	C	D	D	D	D	K	
	2,700pF (272)	C	C	C	C	C	D	D	D	D	K	
	3,300pF (332)	C	C	C	C	C	D	D	D	D	K	
	3,900pF (392)	C	C	C	C	C	D	D	D	D	K	
	4,700pF (472)	C	C	C	C	C	G	G	G	G	K	
	5,600pF (562)	C	C	C	C	C	G	G	G	G	K	
	6,800pF (682)	C	C	C	C	C	G	G	G	G	K	
	8,200pF (822)	C	C	C	C	C	G	G	G	G	K	
	0.010μF (103)	C	C	C	C	C	G	G	K	K	M	M
	0.012μF (123)	D	D	D	D	D	K	K	M	M	M	
	0.015μF (153)	D	D	D	D	D	K	K	M	M	M	
	0.018μF (183)	K	K	K	K	K			M	M		
	0.022μF (223)	K	K	K	K	K			M	M		
	0.027μF (273)	K	K	K	K	K			M	M		
	0.033μF (333)	K	K	K	K	K			M	M		
	0.039μF (393)	K	K	K	K	K						
	0.047μF (473)	K	K	K	K	K						

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

Copyright © by Walsin Technology Corporation. | All rights reserved.
Downloaded from Arrow.com.

X7R Dielectric

DIELECTRIC		X7R													
SIZE		0201				0402					0603				
RATED VOLTAGE		10	16	25	50	10	16	25	50	100	10	16	25	50	100
Capacitance	100pF (101)	L	L	L	L	N	N	N	N	N	S	S	S	S	S
	120pF (121)	L	L	L	L	N	N	N	N	N	S	S	S	S	S
	150pF (151)	L	L	L	L	N	N	N	N	N	S	S	S	S	S
	180pF (181)	L	L	L	L	N	N	N	N	N	S	S	S	S	S
	220pF (221)	L	L	L	L	N	N	N	N	N	S	S	S	S	S
	270pF (271)	L	L	L	L	N	N	N	N	N	S	S	S	S	S
	330pF (331)	L	L	L	L	N	N	N	N	N	S	S	S	S	S
	390pF (391)	L	L	L	L	N	N	N	N	N	S	S	S	S	S
	470pF (471)	L	L	L	L	N	N	N	N	N	S	S	S	S	S
	560pF (561)	L	L	L	L	N	N	N	N	N	S	S	S	S	S
	680pF (681)	L	L	L	L	N	N	N	N	N	S	S	S	S	S
	820pF (821)	L	L	L	L	N	N	N	N	N	S	S	S	S	S
	1,000pF (102)	L	L	L	L	N	N	N	N	N	S	S	S	S	S
	1,200pF (122)	L	L	L		N	N	N	N		S	S	S	S	S
	1,500pF (152)	L	L	L		N	N	N	N		S	S	S	S	S
	1,800pF (182)	L	L	L		N	N	N	N		S	S	S	S	S
	2,200pF (222)	L	L	L		N	N	N	N		S	S	S	S	S
	2,700pF (272)	L	L	L		N	N	N	N		S	S	S	S	S
	3,300pF (332)	L	L	L		N	N	N	N		S	S	S	S	S
	3,900pF (392)	L	L	L		N	N	N	N		S	S	S	S	S
	4,700pF (472)	L	L	L		N	N	N	N		S	S	S	S	S
	5,600pF (562)	L	L	L		N	N	N	N		S	S	S	S	S
	6,800pF (682)	L				N	N	N	N		S	S	S	S	S
	8,200pF (822)	L				N	N	N	N		S	S	S	S	S
	0.010μF (103)	L				N	N	N	N		S	S	S	S	S
	0.012μF (123)					N	N	N			S	S	S	S	X
	0.015μF (153)					N	N	N			S	S	S	S	X
	0.018μF (183)					N	N	N	N		S	S	S	S	X
	0.022μF (223)					N	N	N	N		S	S	S	S	X
	0.027μF (273)					N	N	N	N		S	S	S	S	X
	0.033μF (333)					N	N	N	N		S	S	S	X	X
	0.039μF (393)					N	N	N	N		S	S	S	X	X
	0.047μF (473)					N	N	N	N		S	S	S	X	X
	0.056μF (563)					N	N	N	N		S	S	S	X	
	0.068μF (683)					N	N	N	N		S	S	S	X	
	0.082μF (823)					N	N	N	N		S	S	S	X	
	0.10μF (104)					N	N	N	N		S	S	S	X	X
	0.12μF (124)										X	X	X		
	0.15μF (154)										X	X	X	X	
	0.18μF (184)										X	X	X		
	0.22μF (224)										X	X	X	X	
	0.33μF (334)										X	X	X	X	
	0.47μF (474)														
	0.68μF (684)														
	0.82μF (824)														
	1.0μF (105)											X			

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

Copyright © by Walsin Technology Corporation. | All rights reserved.
Downloaded from Arrow.com.

X7R Dielectric

DIELECTRIC		X7R																		
SIZE		0805									1206									
RATED VOLTAGE (VDC)		10	16	25	50	100	200	250	500	630	10	16	25	50	100	200	250	500	630
Capacitance	100pF (101)	B	B	B	B	B	B	B	B	B						D	D	D	D
	120pF (121)	B	B	B	B	B	B	B	B	B						D	D	D	D
	150pF (151)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	D	D	D	D
	180pF (181)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	D	D	D	D
	220pF (221)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	D	D	D	D
	270pF (271)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	D	D	D	D
	330pF (331)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	D	D	D	D
	390pF (391)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	D	D	D	D
	470pF (471)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	D	D	D	D
	560pF (561)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	D	D	D	D
	680pF (681)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	D	D	D	D
	820pF (821)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	D	D	D	D
	1,000pF (102)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	D	D	D	D
	1,200pF (122)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	D	D	D	D
	1,500pF (152)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	D	D	D	D
	1,800pF (182)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	D	D	D	D
	2,200pF (222)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	D	D	D	D
	2,700pF (272)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	D	D	D	D
	3,300pF (332)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	D	D	D	D
	3,900pF (392)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	D	D	D	D
	4,700pF (472)	B	B	B	B	B	B	B	D	D	B	B	B	B	B	D	D	D	D
	5,600pF (562)	B	B	B	B	B	D	D	D	D	B	B	B	B	B	D	D	D	D
	6,800pF (682)	B	B	B	B	B	D	D	D	D	B	B	B	B	B	D	D	D	D
	8,200pF (822)	B	B	B	B	B	D	D	D	D	B	B	B	B	B	D	D	D	D
	0.010μF (103)	B	B	B	B	B	D	D	D	D	B	B	B	B	B	D	D	D	D
	0.012μF (123)	B	B	B	B	B	D	D			B	B	B	B	B	D	D		
	0.015μF (153)	B	B	B	B	B	D	D			B	B	B	B	B	D	D		
	0.018μF (183)	B	B	B	B	B	D	D			B	B	B	B	B	D	D		
	0.022μF (223)	B	B	B	B	B	D	D			B	B	B	B	B	D	D		
	0.027μF (273)	B	B	B	B	D					B	B	B	B	B				
	0.033μF (333)	B	B	B	B	D					B	B	B	B	B				
	0.039μF (393)	B	B	B	B	D					B	B	B	B	B				
	0.047μF (473)	B	B	B	B	D					B	B	B	B	B				
	0.056μF (563)	B	B	B	B	D					B	B	B	B	B				
	0.068μF (683)	B	B	B	B	D					B	B	B	B	B				
	0.082μF (823)	B	B	B	B	D					B	B	B	B	D				
	0.10μF (104)	B	B	B	B	D					B	B	B	B	D				
	0.12μF (124)	B	B	B	D						B	B	B	B	D				
	0.15μF (154)	D	D	D	D						C	C	C	C	G				
	0.18μF (184)	D	D	D	D						C	C	C	C	G				
	0.22μF (224)	D	D	D	D						C	C	C	C	G				
	0.27μF (274)	D	D	D	I						C	C	C	D	P				
	0.33μF (334)	D	D	D	I						C	C	C	D	P				
	0.39μF (394)	D	D	D	I						C	C	J	P	P				
	0.47μF (474)	D	D	D	I						J	J	J	P	P				
	0.56μF (564)	D	D	D							J	J	J	P	P				
	0.68μF (684)	D	D	D	I						J	J	J	P	P				
	0.82μF (824)	D	D	D							J	J	J	P	P				
	1.0μF (105)	D	D	D	I						J	J	J	P	P				
	2.2μF (225)				I									P	P				
	4.7μF (475)																		
	10μF (106)											P							

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

Copyright © by Walsin Technology Corporation. | All rights reserved.
Downloaded from Arrow.com.

X7R Dielectric

DIELECTRIC		X7R							
SIZE		1210							
RATED VOLTAGE (VDC)		10	16	25	50	100	250	500	1000
Capacitance	100pF (101)						D	D	D
	120pF (121)						D	D	D
	150pF (151)						D	D	D
	180pF (181)						D	D	D
	220pF (221)						D	D	D
	270pF (271)						D	D	D
	330pF (331)						D	D	D
	390pF (391)						D	D	D
	470pF (471)						D	D	D
	560pF (561)						D	D	D
	680pF (681)						C	D	D
	820pF (821)						C	D	D
	1,000pF (102)	C	C	C	C	C	C	D	D
	1,200pF (122)	C	C	C	C	C	C	D	D
	1,500pF (152)	C	C	C	C	C	C	D	D
	1,800pF (182)	C	C	C	C	C	C	D	D
	2,200pF (222)	C	C	C	C	C	C	D	D
	2,700pF (272)	C	C	C	C	C	C	D	D
	3,300pF (332)	C	C	C	C	C	C	D	D
	3,900pF (392)	C	C	C	C	C	C	D	G
	4,700pF (472)	C	C	C	C	C	C	D	G
	5,600pF (562)	C	C	C	C	C	C	D	G
	6,800pF (682)	C	C	C	C	C	C	D	G
	8,200pF (822)	C	C	C	C	C	C	D	G
	0.010μF (103)	C	C	C	C	C	C	D	G
	0.012μF (123)	C	C	C	C	C	C	D	
	0.015μF (153)	C	C	C	C	C	C	D	
	0.018μF (183)	C	C	C	C	C	C	D	
	0.022μF (223)	C	C	C	C	C	C	D	
	0.027μF (273)	C	C	C	C	C	C		
	0.033μF (333)	C	C	C	C	C	C		
	0.039μF (393)	C	C	C	C	C	C		
	0.047μF (473)	C	C	C	C	C	D		
	0.056μF (563)	C	C	C	C	C			
	0.068μF (683)	C	C	C	C	C			
	0.082μF (823)	C	C	C	C	C			
	0.10μF (104)	C	C	C	C	C			
	0.12μF (124)	C	C	C	C				
	0.15μF (154)	C	C	C	C				
	0.18μF (184)	C	C	C	C				
	0.22μF (224)	C	C	C	C				
	0.27μF (274)	C	C	C	C				
	0.33μF (334)	C	C	C	D				
	0.39μF (394)	C	C	C	D				
	0.47μF (474)	C	C	C	D				
	0.56μF (564)	D	D	D	D				
	0.68μF (684)	D	D	D	D				
	0.82μF (824)	D	D	D	D				
	1.0μF (105)	D	D	D	D				
	1.5μF (155)		K						
	2.2μF (225)		K		M	M			
	4.7μF (475)				M	M			
	10μF (106)			M	M				

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

Copyright © by Walsin Technology Corporation. | All rights reserved.
Downloaded from Arrow.com.

X6S Dielectric

Dielectric		X6S	
Size		0402	
Rated Voltage (VDC)		6.3	10V
Capacitance	0.1μF (104)		
	1.0μF (105)	N	
	1.5μF (155)		
	2.2μF (225)		
	3.3μF (335)		
	4.7μF (475)		
	6.8uF (685)		
	10μF (106)		
	22μF (226)		
	47μF (476)		
	100μF (107)		

著作權所有 侵害必究
華新科技股份有限公司
PSA
PASSIVE SYSTEM ALLIANCE
Walsin Technology Corporation
COPYRIGHT © WALSIN TECHNOLOGY CORPORATION. ALL RIGHTS RESERVED.

Copyright © by Walsin Technology Corporation. | All rights reserved.
Downloaded from Arrow.com.

8. PACKAGING STYLE AND QUANTITY

Size	Thickness (mm)/Symbol		Paper tape		Plastic tape	
			7" reel	13" reel	7" reel	13" reel
0201 (0603)	0.30±0.03	L	15k	70k	-	-
0402 (1005)	0.50±0.05	N	10k	50k	-	-
0603 (1608)	0.80±0.07	S	4k	15k	-	-
	0.80+0.15/-0.10	X	4k	15k	-	-
0805 (2012)	0.60±0.10	A	4k	15k	-	-
	0.80±0.10	B	4k	15k	-	-
	1.25±0.10	D	-	-	3k	10k
	1.25±0.20	I	-	-	3k	10k
1206 (3216)	0.80±0.10	B	4k	15k	-	-
	0.95±0.10	C	-	-	3k	10k
	1.15±0.15	J	-	-	3k	10k
	1.25±0.10	D	-	-	3k	10k
	1.60±0.20	G	-	-	2k	10k
	1.60+0.30/-0.10	P	-	-	2k	9k
1210 (3225)	0.95±0.10	C	-	-	3k	10k
	1.25±0.10	D	-	-	3k	10k
	1.60±0.20	G	-	-	2k	8k
	2.00±0.20	K	-	-	1k	6k
	2.50±0.30	M	-	-	1k	6k

Unit: pieces

著作權所有 侵害必究
華新科技股份有限公司
PSA
PASSIVE SYSTEM ALLIANCE
Walsin Technology Corporation
COPYRIGHT © WALSIN TECHNOLOGY CORPORATION. ALL RIGHTS RESERVED.

Copyright © by Walsin Technology Corporation. | All rights reserved.
Downloaded from Arrow.com.

9. RELIABILITY TEST CONDITIONS AND REQUIREMENTS

<table>
<tr><th>No.</th><th>AEC-Q200 Test Item</th><th>AEC-Q200 Test Condition</th><th>Requirements</th></tr>
<tr><td>1.</td><td>Pre-and Post-Stress Electrical Test</td><td>---</td><td></td></tr>
<tr><td>2.</td><td>High Temperature Exposure (Storage)
MIL-STD-202
Method 108</td><td>* Test temp.: 150±3°C(X6S:105±3°C)
* Unpowered.
* Test time: 1000+24/-0 hrs.
* Measurement to be made after keeping at room temp. for 24±2 hrs.
X6S: Before initial & After measurement: Perform 150+0/-10°C for 1 hr and then set for 24±2 hrs at room temp.</td><td> No remarkable damage.
* Cap change：X8G/NPO: within ±2.5% or ±0.25pF whichever is larger.
X7R: within ±10.00%; X6S: within ±12.5%.
* Q/D.F. value:
X8G/NPO: Cap≥30pF, Q≥1000 ; Cap<30pF, Q≥400+20C.
X7R/X6S:
<table>
<tr><th>Rated vol.</th><th>D.F.≦</th><th colspan="2">Exception of D.F.≦</th></tr>
<tr><td rowspan="4">≧100V</td><td rowspan="4">≦3%</td><td>≦6%</td><td>1206≧0.47μF</td></tr>
<tr><td>≦7%</td><td>1812≧4.7μF;1825≥4.7μF; 2220≥4.7μF; 2225≥4.7μF</td></tr>
<tr><td>≦7.5%</td><td>0603≧0.068μF;0805＞0.1μF;1206≧1μF;1210≧2.2μF</td></tr>
<tr><td>≦20%</td><td>0805＞0.22μF;1210≧3.3μF</td></tr>
<tr><td rowspan="4">50V</td><td rowspan="4">≦3%</td><td>≦6%</td><td>0201(50V);0603≧0.047μF;0805≧0.18μF;1206≧0.47μF</td></tr>
<tr><td>≦7%</td><td>1812≧4.7μF;1825≥4.7μF; 2220≥4.7μF; 2225≥4.7μF</td></tr>
<tr><td>≦10%</td><td>0201≧0.01uF; 0402≧0.012μF;1210≧3.3μF</td></tr>
<tr><td>≦20%</td><td>0402≧0.047μF;0603>0.1μF;0805≧1μF(0805/X7R>0.47μF);
1206≧2.2μF;1210≧10μF;</td></tr>
<tr><td>35V</td><td>≦5%</td><td>≦20%</td><td>0603≧1μF;0805≥2.2μF;1206≧2.2μF;1210≧10μF</td></tr>
<tr><td rowspan="4">25V</td><td rowspan="4">≦5%</td><td>≦10%</td><td>0201≧0.01μF;0805≧1μF;1210≧10μF</td></tr>
<tr><td>≦14%</td><td>0603≧0.33μF</td></tr>
<tr><td>≦15%</td><td>0201≧0.1μF;0603≧0.47μF;
0402≧0.10μF(0402/X7R≧0.056μF);0805≧2.2μF;
1206≧4.7μF;1210≧22μF</td></tr>
<tr><td>≦20%</td><td>0402≧0.33μF</td></tr>
<tr><td rowspan="2">16V</td><td rowspan="2">≦5%</td><td>≦10%</td><td>0603≧0.15μF;0805≧0.68μF;1206≧2.2μF;1210≧4.7μF</td></tr>
<tr><td>≦15%</td><td>0201≧0.01μF(0201/X7R≧0.022μF);0402≧0.033μF;
0603>0.47μF;0805≧2.2μF;1206≧4.7μF;1210≧22μF</td></tr>
<tr><td rowspan="2">10V</td><td rowspan="2">≦7.5%</td><td>≦15%</td><td>0201≧0.012μF;0402≧0.22μF (0402/X7R≧0.15μF);
0603≧0.33μF;0805≧2.2μF;1206≧2.2μF;1210≧22μF</td></tr>
<tr><td>≦20%</td><td>0201≧0.1μF;0402≧1μF;</td></tr>
<tr><td>6.3V</td><td>≦15%</td><td>≦30%</td><td>0201≧0.1μF;0402≧1μF(0402/X6S≧0.47μF);
0603≧10μF;0805≧4.7μF;1206≧47μF;1210≧100μF</td></tr>
<tr><td>4V</td><td>≦20%</td><td>---</td><td>---</td></tr>
</table>
* I.R.: ≥10GΩ or RxC≥500Ω-F whichever is smaller.
Class II (X7R/X6S)
<table>
<tr><th>Rated voltage</th><th>Insulation Resistance</th></tr>
<tr><td>100V: All X7R;1210≥3.3μF</td><td rowspan="6">1GΩ or RxC≧10 Ω-F whichever is smaller.</td></tr>
<tr><td>50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF</td></tr>
<tr><td>35V: 0603≥1μF;0805≥2.2μF;1206≥2.2μF;1210≥10μF</td></tr>
<tr><td>25V: 0201≥0.1uF;0402≥0.22μF;0603≥2.2μF;0805≥2.2μF;
1206≥10μF;1210≥10μF</td></tr>
<tr><td>16V: 0201≥0.1uF;0402≥0.22μF;0603≥1μF;0805≥2.2μF;
1206≥10μF;1210≥47μF</td></tr>
<tr><td>10V: 0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF;
1206≥4.7μF;1210≥47μF</td></tr>
<tr><td>6.3V; 4V; Size≥1812</td><td></td></tr>
</table></td></tr>
</table>

* "Room condition" Temperature: 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

Copyright © by Walsin Technology Corporation. | All rights reserved.
Downloaded from Arrow.com.

<table>
<tr><th>No.</th><th>AEC-Q200 Test Item</th><th>AEC-Q200 Test Condition</th><th>Requirements</th></tr>
<tr><td>3.</td><td>Temperature Cycling
JESD22
Method JA-104</td><td>* Conduct 1000 cycles according to the temperatures and time.
<table>
<tr><th>Step</th><th>Temp. (°C)</th><th>Time (min.)</th></tr>
<tr><td>1</td><td>Min. operating temp +0/-3</td><td>30±3</td></tr>
<tr><td>2</td><td>Max. operating temp +3/-0</td><td>30±3</td></tr>
</table>
* Before initial measurement (X7R):
Perform 150+0/-10°C for 1 hr and then set for 24±2 hrs at room temp.
*X6S: Before initial measurement:
Perform 150+0/-10°C for 1 hr and then set for 24±2 hrs at room temp.

*Measurement to be made after keeping at room temp. for 24±2 hrs.
*X6S- Post-treatment: Non treatment:
Let sit for 24+/-2hours at room temperature, then measure.</td><td>* No remarkable damage.
* Cap change：X8G/NPO: within ±2.5% or 0.25pF whichever is larger.
X7R: within ±10.0%; X6S: within ±30%;
* Q/D.F. value:
X8G/NPO: Cap≥30pF, Q≥1000 ; Cap<30pF, Q≥400+20C.
X7R/X6S:
<table>
<tr><th>Rated vol.</th><th>D.F.≦</th><th colspan="2">Exception of D.F.≦</th></tr>
<tr><td rowspan="4">≧ 100V</td><td rowspan="4">≦3%</td><td>≦6%</td><td>1206≧0.47μF</td></tr>
<tr><td>≦7%</td><td>1812≧4.7μF;1825≥4.7μF; 2220≥4.7μF; 2225≥4.7μF</td></tr>
<tr><td>≦7.5%</td><td>0603≧0.068μF;0805＞0.1μF;1206≧1μF;1210≧2.2μF</td></tr>
<tr><td>≦20%</td><td>0805＞0.22μF;1210≧3.3μF</td></tr>
<tr><td rowspan="4">50V</td><td rowspan="4">≦3%</td><td>≦6%</td><td>0201(50V);0603≧0.047μF;0805≧0.18μF;1206≧0.47μF</td></tr>
<tr><td>≦7%</td><td>1812≧4.7μF;1825≥4.7μF; 2220≥4.7μF; 2225≥4.7μF</td></tr>
<tr><td>≦10%</td><td>0201≧0.01uF; 0402≧0.012μF;1210≧3.3μF</td></tr>
<tr><td>≦20%</td><td>0402≧0.047μF;0603>0.1μF;0805≧1μF(0805/X7R>0.47μF);
1206≧2.2μF;1210≧10μF;</td></tr>
<tr><td>35V</td><td>≦5%</td><td>≦20%</td><td>0603≧1μF;0805≥2.2μF;1206≧2.2μF;1210≧10μF</td></tr>
<tr><td rowspan="4">25V</td><td rowspan="4">≦5%</td><td>≦10%</td><td>0201≧0.01μF;0805≧1μF;1210≧10μF</td></tr>
<tr><td>≦14%</td><td>0603≧0.33μF</td></tr>
<tr><td>≦15%</td><td>0201≧0.1μF;0603≧0.47μF;
0402≧0.10μF(0402/X7R≧0.056μF);0805≧2.2μF;
1206≧4.7μF;1210≧22μF</td></tr>
<tr><td>≦20%</td><td>0402≧0.33μF</td></tr>
<tr><td rowspan="2">16V</td><td rowspan="2">≦5%</td><td>≦10%</td><td>0603≧0.15μF;0805≧0.68μF;1206≧2.2μF;1210≧4.7μF</td></tr>
<tr><td>≦15%</td><td>0201≧0.01μF(0201/X7R≧0.022μF);0402≧0.033μF;
0603>0.47μF;0805≧2.2μF;1206≧4.7μF;1210≧22μF</td></tr>
<tr><td>10V</td><td>≦7.5%</td><td>≦15%</td><td>0201≧0.012μF;0402≧0.22μF (0402/X7R≧0.15μF);
0603≧0.33μF;0805≧2.2μF;1206≧2.2μF;1210≧22μF</td></tr>
<tr><td rowspan="2">6.3V</td><td rowspan="2">≦15%</td><td>≦20%</td><td>0201≧0.1μF;0402≧1μF;</td></tr>
<tr><td>≦30%</td><td>0201≧0.1μF;0402≧1μF(0402/X6S≧0.47μF);
0603≧10μF;0805≧4.7μF;1206≧47μF;1210≧100μF</td></tr>
<tr><td>4V</td><td>≦20%</td><td>---</td><td>---</td></tr>
</table>
* I.R.: ≥10GΩ or RxC≥500Ω-F whichever is smaller.
Class II (X7R/X6S)
<table>
<tr><th>Rated voltage</th><th>Insulation Resistance</th></tr>
<tr><td>100V: All X7R;1210≥3.3μF</td><td rowspan="7">1GΩ or RxC≧10 Ω-F whichever is smaller.</td></tr>
<tr><td>50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF</td></tr>
<tr><td>35V: 0603≥1μF;0805≥2.2μF;1206≥2.2μF;1210≥10μF</td></tr>
<tr><td>25V: 0201≥0.1uF;0402≥0.22μF;0603≥2.2μF;0805≥2.2μF;
1206≥10μF;1210≥10μF</td></tr>
<tr><td>16V: 0201≥0.1uF;0402≥0.22μF;0603≥1μF;0805≥2.2μF;
1206≥10μF;1210≥47μF</td></tr>
<tr><td>10V: 0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF;
1206≥4.7μF;1210≥47μF</td></tr>
<tr><td>6.3V; 4V; Size≥1812</td></tr>
</table></td></tr>
</table>

* "Room condition" Temperature: 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

Copyright © by Walsin Technology Corporation. | All rights reserved.
Downloaded from Arrow.com.

<table>
<tr><th>No.</th><th>AEC-Q200 Test Item</th><th>AEC-Q200 Test Condition</th><th>Requirements</th></tr>
<tr><td>4.</td><td>Destructive Physical Analysis
EIA-469</td><td>Per EIA-469</td><td>No defects or abnormalities</td></tr>
<tr><td>5.</td><td>Moisture Resistance
MIL-STD-202
Method 106</td><td>* Test temp.: 25~65°C
* Humidity: 80~100% RH
* Test time: 10 cycles, t=24hrs/cycle.
* Measurement to be made after keeping at room temp. for 24±2 hrs.</td><td>* No remarkable damage.
* Cap change : X8G/NPO: within ±3.0% or 0.30pF whichever is larger
X7R/X6S: within ±12.5%.
* Q/D.F. value:
X8G/NPO: More than 30pF Q≥350 ; 10pF≤C<30pF, Q≥275+2.5C
Less than 10pF Q≥200+10C
X7R/X6S:
<table>
<tr><th>Rated vol.</th><th>D.F.≦</th><th colspan="2">Exception of D.F.≦</th></tr>
<tr><td rowspan="4">≧ 100V</td><td rowspan="4">≦3%</td><td>≦6%</td><td>1206≧0.47μF</td></tr>
<tr><td>≦7%</td><td>1812≧4.7μF;1825≥4.7μF; 2220≥4.7μF; 2225≥4.7μF</td></tr>
<tr><td>≦7.5%</td><td>0603≧0.068μF;0805＞0.1μF;1206≧1μF;1210≧2.2μF</td></tr>
<tr><td>≦20%</td><td>0805＞0.22μF;1210≧3.3μF</td></tr>
<tr><td rowspan="4">50V</td><td rowspan="4">≦3%</td><td>≦6%</td><td>0201(50V);0603≧0.047μF;0805≧0.18μF;1206≧0.47μF</td></tr>
<tr><td>≦7%</td><td>1812≧4.7μF;1825≥4.7μF; 2220≥4.7μF; 2225≥4.7μF</td></tr>
<tr><td>≦10%</td><td>0201≧0.01uF; 0402≧0.012μF;1210≧3.3μF</td></tr>
<tr><td>≦20%</td><td>0402≧0.047μF;0603>0.1μF;0805≧1μF(0805/X7R>0.47μF);
1206≧2.2μF;1210≧10μF;</td></tr>
<tr><td>35V</td><td>≦5%</td><td>≦20%</td><td>0603≧1μF;0805≥2.2μF;1206≧2.2μF;1210≧10μF</td></tr>
<tr><td rowspan="4">25V</td><td rowspan="4">≦5%</td><td>≦10%</td><td>0201≧0.01μF;0805≧1μF;1210≧10μF</td></tr>
<tr><td>≦14%</td><td>0603≧0.33μF</td></tr>
<tr><td>≦15%</td><td>0201≧0.1μF;0603≧0.47μF;
0402≧0.10μF(0402/X7R≧0.056μF);0805≧2.2μF;
1206≧4.7μF;1210≧22μF</td></tr>
<tr><td>≦20%</td><td>0402≧0.33μF</td></tr>
<tr><td rowspan="2">16V</td><td rowspan="2">≦5%</td><td>≦10%</td><td>0603≧0.15μF;0805≧0.68μF;1206≧2.2μF;1210≧4.7μF</td></tr>
<tr><td>≦15%</td><td>0201≧0.01μF(0201/X7R≧0.022μF);0402≧0.033μF;
0603>0.47μF;0805≧2.2μF;1206≧4.7μF;1210≧22μF</td></tr>
<tr><td rowspan="2">10V</td><td rowspan="2">≦7.5%</td><td>≦15%</td><td>0201≧0.012μF;0402≧0.22μF (0402/X7R≧0.15μF);
0603≧0.33μF;0805≧2.2μF;1206≧2.2μF;1210≧22μF</td></tr>
<tr><td>≦20%</td><td>0201≧0.1μF;0402≧1μF;</td></tr>
<tr><td>6.3V</td><td>≦15%</td><td>≦30%</td><td>0201≧0.1μF;0402≧1μF(0402/X6S≧0.47μF);
0603≧10μF;0805≧4.7μF;1206≧47μF;1210≧100μF</td></tr>
<tr><td>4V</td><td>≦20%</td><td>---</td><td>---</td></tr>
</table>
* I.R.: ≥10GΩ or RxC≥500Ω-F whichever is smaller.
Class II (X7R/X6S)
<table>
<tr><th>Rated voltage</th><th>Insulation Resistance</th></tr>
<tr><td>100V: All X7R;1210≥3.3μF</td><td rowspan="7">1GΩ or RxC≧10 Ω-F whichever is smaller.</td></tr>
<tr><td>50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF</td></tr>
<tr><td>35V: 0603≥1μF;0805≥2.2μF;1206≥2.2μF;1210≥10μF</td></tr>
<tr><td>25V: 0201≥0.1uF;0402≥0.22μF;0603≥2.2μF;0805≥2.2μF;
1206≥10μF;1210≥10μF</td></tr>
<tr><td>16V: 0201≥0.1uF;0402≥0.22μF;0603≥1μF;0805≥2.2μF;
1206≥10μF;1210≥47μF</td></tr>
<tr><td>10V: 0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF;
1206≥4.7μF;1210≥47μF</td></tr>
<tr><td>6.3V; 4V; Size≥1812</td></tr>
</table></td></tr>
</table>

* "Room condition" Temperature: 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

Copyright © by Walsin Technology Corporation. | All rights reserved.
Downloaded from Arrow.com.

<table>
<tr><th>No.</th><th>AEC-Q200 Test Item</th><th>AEC-Q200 Test Condition</th><th>Requirements</th></tr>
<tr><td>6.</td><td>Biased Humidity
MIL-STD-202
Method 103</td><td>* Test temp.: 85±3°C
* Humidity: 85%RH
* Test time: 1000+24/-0 hrs.
* To apply voltage：rated voltage and 1.3~1.5Vdc.
(add 100k ohm resistor)
* Before initial measurement (Class II only) : To apply test voltage for 1hr at test temp. and then set for 24±2 hrs at room temp.
* Measurement to be made after keeping at room temp. for 24±2 hrs.</td><td>* No remarkable damage.
* Cap change: X8G/NPO: within ±3.0% or 0.30pF whichever is larger.
X7R/X6S: within ±12.5%
* Q/D.F. value:
X8G/NPO: C≥30pF , Q≥200 ; C<30pF , Q≥100+10/3C
X7R/X6S:
<table>
<tr><th>Rated vol.</th><th>D.F.≦</th><th colspan="2">Exception of D.F.≦</th></tr>
<tr><td rowspan="4">≧ 100V</td><td rowspan="4">≦3%</td><td>≦6%</td><td>1206≧0.47μF</td></tr>
<tr><td>≦7%</td><td>1812≧4.7μF;1825≥4.7μF; 2220≥4.7μF; 2225≥4.7μF</td></tr>
<tr><td>≦7.5%</td><td>0603≧0.068μF;0805＞0.1μF;1206≧1μF;1210≧2.2μF</td></tr>
<tr><td>≦20%</td><td>0805＞0.22μF;1210≧3.3μF</td></tr>
<tr><td rowspan="4">50V</td><td rowspan="4">≦3%</td><td>≦6%</td><td>0201(50V);0603≧0.047μF;0805≧0.18μF;1206≧0.47μF</td></tr>
<tr><td>≦7%</td><td>1812≧4.7μF;1825≥4.7μF; 2220≥4.7μF; 2225≥4.7μF</td></tr>
<tr><td>≦10%</td><td>0201≧0.01uF; 0402≧0.012μF;1210≧3.3μF</td></tr>
<tr><td>≦20%</td><td>0402≧0.047μF;0603>0.1μF;0805≧1μF(0805/X7R>0.47μF);
1206≧2.2μF;1210≧10μF;</td></tr>
<tr><td>35V</td><td>≦5%</td><td>≦20%</td><td>0603≧1μF;0805≥2.2μF;1206≧2.2μF;1210≧10μF</td></tr>
<tr><td rowspan="4">25V</td><td rowspan="4">≦5%</td><td>≦10%</td><td>0201≧0.01μF;0805≧1μF;1210≧10μF</td></tr>
<tr><td>≦14%</td><td>0603≧0.33μF</td></tr>
<tr><td>≦15%</td><td>0201≧0.1μF;0603≧0.47μF;
0402≧0.10μF(0402/X7R≧0.056μF);0805≧2.2μF;
1206≧4.7μF;1210≧22μF</td></tr>
<tr><td>≦20%</td><td>0402≧0.33μF</td></tr>
<tr><td rowspan="2">16V</td><td rowspan="2">≦5%</td><td>≦10%</td><td>0603≧0.15μF;0805≧0.68μF;1206≧2.2μF;1210≧4.7μF</td></tr>
<tr><td>≦15%</td><td>0201≧0.01μF(0201/X7R≧0.022μF);0402≧0.033μF;
0603>0.47μF;0805≧2.2μF;1206≧4.7μF;1210≧22μF</td></tr>
<tr><td rowspan="2">10V</td><td rowspan="2">≦7.5%</td><td>≦15%</td><td>0201≧0.012μF;0402≧0.22μF (0402/X7R≧0.15μF);
0603≧0.33μF;0805≧2.2μF;1206≧2.2μF;1210≧22μF</td></tr>
<tr><td>≦20%</td><td>0201≧0.1μF;0402≧1μF;</td></tr>
<tr><td>6.3V</td><td>≦15%</td><td>≦30%</td><td>0201≧0.1μF;0402≧1μF(0402/X6S≧0.47μF);
0603≧10μF;0805≧4.7μF;1206≧47μF;1210≧100μF</td></tr>
<tr><td>4V</td><td>≦20%</td><td>---</td><td>---</td></tr>
</table>
* I.R.: ≥1GΩ or RxC≥50Ω-F whichever is smaller.
Class II (X7R/X6S) for rated voltage test
<table>
<tr><th>Rated voltage</th><th>Insulation Resistance</th></tr>
<tr><td>100V: All X7R;1210≥3.3μF</td><td rowspan="7">500MΩ or RxC≧5 Ω-F whichever is smaller.</td></tr>
<tr><td>50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF</td></tr>
<tr><td>35V: 0603≥1μF;0805≥2.2μF;1206≥2.2μF;1210≥10μF</td></tr>
<tr><td>25V: 0201≥0.1uF;0402≥0.22μF;0603≥2.2μF;0805≥2.2μF;
1206≥10μF;1210≥10μF</td></tr>
<tr><td>16V: 0201≥0.1uF;0402≥0.22μF;0603≥1μF;0805≥2.2μF;
1206≥10μF;1210≥47μF</td></tr>
<tr><td>10V: 0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF;
1206≥4.7μF;1210≥47μF</td></tr>
<tr><td>6.3V; 4V; Size≥1812</td></tr>
</table>
Class II (X7R/X6S) for 1.3~1.5Vdc
<table>
<tr><th>Rated voltage</th><th>Insulation Resistance</th></tr>
<tr><td>100V: All X7R;1210≥3.3μF</td><td rowspan="7">1GΩ or RxC≧10 Ω-F whichever is smaller.</td></tr>
<tr><td>50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF</td></tr>
<tr><td>35V: 0603≥1μF;0805≥2.2μF;1206≥2.2μF;1210≥10μF</td></tr>
<tr><td>25V: 0201≥0.1uF;0402≥0.22μF;0603≥2.2μF;0805≥2.2μF;
1206≥10μF;1210≥10μF</td></tr>
<tr><td>16V: 0201≥0.1uF;0402≥0.22μF;0603≥1μF;0805≥2.2μF;
1206≥10μF;1210≥47μF</td></tr>
<tr><td>10V: 0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF;
1206≥4.7μF;1210≥47μF</td></tr>
<tr><td>6.3V; 4V; Size≥1812</td></tr>
</table></td></tr>
</table>

* "Room condition" Temperature: 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

Copyright © by Walsin Technology Corporation. | All rights reserved.
Downloaded from Arrow.com.

<table>
<tr><th>No.</th><th>AEC-Q200
Test Item</th><th>AEC-Q200 Test Condition</th><th>Requirements</th></tr>
<tr><td>7.</td><td>Operational Life
MIL-STD-202
Method 108</td><td>* Test temp.:
Maximum Operating Temperature ±3°C
* To apply voltage:
(1) 10V≤Ur≤250V:200% of rated voltage.
(2) 150% of rated voltage:
a) 500V
b) ≤ 6.3V or C ≥10μF*
Excluding 0402S105/6.3V:100% of rated voltage.
c)
<table>
<tr><th>Size</th><th>Dielectric</th><th>Rated Voltage</th><th>Capacitance</th></tr>
<tr><td>0402</td><td>X7R</td><td>50V</td><td>C>0.01μF</td></tr>
<tr><td rowspan="2">0603</td><td rowspan="2">X7R</td><td>≤25V</td><td>C≥1.0μF</td></tr>
<tr><td>50V</td><td>C>0.1μF</td></tr>
<tr><td rowspan="2">0805</td><td rowspan="2">X7R</td><td>50V</td><td>C≥0.68μF</td></tr>
<tr><td>≥100V</td><td>C≥0.12μF</td></tr>
<tr><td rowspan="2">1206</td><td rowspan="2">X7R</td><td>≤50V</td><td>C>1.0μF</td></tr>
<tr><td>100V</td><td>C≥1.0μF</td></tr>
<tr><td rowspan="3">1210</td><td rowspan="3">X7R</td><td>≤50V</td><td>C>1.0μF</td></tr>
<tr><td>100V</td><td>C≥1.0μF</td></tr>
<tr><td>>100V</td><td>C≥0.22μF</td></tr>
<tr><td rowspan="2">1812</td><td rowspan="2">X7R</td><td>≤50V</td><td>C≥4.7μF</td></tr>
<tr><td>100V</td><td>C≥1.0μF</td></tr>
<tr><td>1825
2220
2225</td><td>X7R</td><td>≥100V</td><td>C≥1.0μF</td></tr>
<tr><td>ALL</td><td>X7R</td><td>ALL</td><td>C≥10μF</td></tr>
</table>
(3) 400V/450V/630V:120% of rated voltage.
(4) Ur≥1000V : 110% of rated voltage.
Excluding 1206N/Cap≦102/1kV&
1210N/Cap≦153/1kV & 1210B/Cap≦103/1kV
:120% of rated voltage.
* Test time: 1000+24/-0 hrs.
* Before initial measurement (X7R only):
Apply test voltage for 1 hr at 125℃.
Remove and let set for 24±2 hrs at room temp.
* Measurement to be made after keeping at room temp. for 24±2 hrs.
*X6S: Before initial & After measurement:
Perform 150+0/-10°C for 1 hr and then set for 24±2 hrs at room temp.</td><td>* No remarkable damage.
* Cap change: X8G/NPO: within ±3.0% or ±0.3pF whichever is larger
X7R/X6S: within ±12.5%.
* Q/D.F. value:
X8G/NPO: More than 30pF, Q≥350 ; 10pF≤C<30pF, Q≥275+2.5C
Less than 10pF, Q≥200+10C
X7R/X6S:
<table>
<tr><th>Rated vol.</th><th>D.F.≦</th><th colspan="2">Exception of D.F.≦</th></tr>
<tr><td rowspan="4">≧
100V</td><td rowspan="4">≦3%</td><td>≦6%</td><td>1206≧0.47μF</td></tr>
<tr><td>≦7%</td><td>1812≧4.7μF;1825≥4.7μF; 2220≥4.7μF; 2225≥4.7μF</td></tr>
<tr><td>≦7.5%</td><td>0603≧0.068μF;0805＞0.1μF;1206≧1μF;1210≧2.2μF</td></tr>
<tr><td>≦20%</td><td>0805＞0.22μF;1210≧3.3μF</td></tr>
<tr><td rowspan="4">50V</td><td rowspan="4">≦3%</td><td>≦6%</td><td>0201(50V);0603≧0.047μF;0805≧0.18μF;1206≧0.47μF</td></tr>
<tr><td>≦7%</td><td>1812≧4.7μF;1825≥4.7μF; 2220≥4.7μF; 2225≥4.7μF</td></tr>
<tr><td>≦10%</td><td>0201≧0.01uF; 0402≧0.012μF;1210≧3.3μF</td></tr>
<tr><td>≦20%</td><td>0402≧0.047μF;0603>0.1μF;0805≧1μF(0805/X7R>0.47μF);
1206≧2.2μF;1210≧10μF;</td></tr>
<tr><td>35V</td><td>≦5%</td><td>≦20%</td><td>0603≧1μF;0805≥2.2μF;1206≧2.2μF;1210≧10μF</td></tr>
<tr><td rowspan="4">25V</td><td rowspan="4">≦5%</td><td>≦10%</td><td>0201≧0.01μF;0805≧1μF;1210≧10μF</td></tr>
<tr><td>≦14%</td><td>0603≧0.33μF</td></tr>
<tr><td>≦15%</td><td>0201≧0.1μF;0603≧0.47μF;
0402≧0.10μF(0402/X7R≧0.056μF);0805≧2.2μF;
1206≧4.7μF;1210≧22μF</td></tr>
<tr><td>≦20%</td><td>0402≧0.33μF</td></tr>
<tr><td rowspan="2">16V</td><td rowspan="2">≦5%</td><td>≦10%</td><td>0603≧0.15μF;0805≧0.68μF;1206≧2.2μF;1210≧4.7μF</td></tr>
<tr><td>≦15%</td><td>0201≧0.01μF(0201/X7R≧0.022μF);0402≧0.033μF;
0603>0.47μF;0805≧2.2μF;1206≧4.7μF;1210≧22μF</td></tr>
<tr><td rowspan="2">10V</td><td rowspan="2">≦7.5%</td><td>≦15%</td><td>0201≧0.012μF;0402≧0.22μF (0402/X7R≧0.15μF);
0603≧0.33μF;0805≧2.2μF;1206≧2.2μF;1210≧22μF</td></tr>
<tr><td>≦20%</td><td>0201≧0.1μF;0402≧1μF;</td></tr>
<tr><td>6.3V</td><td>≦15%</td><td>≦30%</td><td>0201≧0.1μF;0402≧1μF(0402/X6S≧0.47μF);
0603≧10μF;0805≧4.7μF;1206≧47μF;1210≧100μF</td></tr>
<tr><td>4V</td><td>≦20%</td><td>---</td><td>---</td></tr>
</table>
* I.R.: ≥1GΩ or RxC≥50Ω-F whichever is smaller.
Class II (X7R/X6S)
<table>
<tr><th>Rated voltage</th><th>Insulation Resistance</th></tr>
<tr><td>100V: All X7R;1210≥3.3μF</td><td rowspan="7">1GΩ or RxC≧10 Ω-F whichever is smaller.</td></tr>
<tr><td>50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF</td></tr>
<tr><td>35V: 0603≥1μF;0805≥2.2μF;1206≥2.2μF;1210≥10μF</td></tr>
<tr><td>25V: 0201≥0.1uF;0402≥0.22μF;0603≥2.2μF;0805≥2.2μF;
1206≥10μF;1210≥10μF</td></tr>
<tr><td>16V: 0201≥0.1uF;0402≥0.22μF;0603≥1μF;0805≥2.2μF;
1206≥10μF;1210≥47μF</td></tr>
<tr><td>10V: 0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF;
1206≥4.7μF;1210≥47μF</td></tr>
<tr><td>6.3V; 4V; Size≥1812</td></tr>
</table></td></tr>
<tr><td>8.</td><td>External Visual
MIL-STD-883
Method 2009</td><td>Visual inspection</td><td>No remarkable defect.</td></tr>
<tr><td>9.</td><td>Physical Dimension
JESD22
Method JB-100</td><td>Using by calipers</td><td>Within the specified dimensions</td></tr>
</table>

* "Room condition" Temperature: 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

Copyright © by Walsin Technology Corporation. | All rights reserved.
Downloaded from Arrow.com.

<table>
<tr><th>No.</th><th>AEC-Q200 Test Item</th><th>AEC-Q200 Test Condition</th><th>Requirements</th></tr>
<tr><td>10.</td><td>Resistance to Solvents
MIL-STD-202
Method 215</td><td>* Temperature: 25±5°C
* Time: 3+0.5/-0 min.
* Solvent: Iso-propyl alcohol.</td><td>* No remarkable damage.
* Cap.: within the specified tolerance.
* Q/D.F. value:
X8G/NPO: Cap≥30pF, Q≥1000 ; Cap<30pF, Q≥400+20C.
X7R/X6S:
<table>
<tr><th>Rated vol.</th><th>D.F.≦</th><th colspan="2">Exception of D.F. ≦</th></tr>
<tr><td rowspan="4">≧100V</td><td rowspan="4">≦2.5%</td><td>≦3%</td><td>1206≧0.47μF</td></tr>
<tr><td>≦3.5%</td><td>1812≧4.7μF;1825≥4.7μF;2220≥4.7μF;2225≥4.7μF</td></tr>
<tr><td>≦5%</td><td>0603≧0.068μF; 0805＞0.1μF; 1206≧1μF; 1210≧2.2μF;</td></tr>
<tr><td>≦10%</td><td>0805＞0.22μF; 1210≧3.3μF</td></tr>
<tr><td rowspan="4">50V</td><td rowspan="4">≦2.5%</td><td>≦3%</td><td>0201(50V); 0603≧0.047μF; 0805≧0.18μF; 1206≧0.47μF</td></tr>
<tr><td>≦3.5%</td><td>1812≧4.7μF;1825≥4.7μF;2220≥4.7μF;2225≥4.7μF</td></tr>
<tr><td>≦5%</td><td>0201≧0.01uF; 0402≥0.012μF; 1210≧3.3μF</td></tr>
<tr><td>≦10%</td><td>0402>0.047μF; 0603>0.1μF; 0805/X7R>0.47μF;
1206≧2.2μF; 1210≧10μF</td></tr>
<tr><td>35V</td><td>≦3.5%</td><td>≦10%</td><td>0603≧1μF; 0805≥2.2μF; 1206≧2.2μF; 1210≧10μF</td></tr>
<tr><td rowspan="4">25V</td><td rowspan="4">≦3.5%</td><td>≦5%</td><td>0201≧0.01μF; 0805≧1μF; 1210≧10μF</td></tr>
<tr><td>≦7%</td><td>0603≧0.33μF</td></tr>
<tr><td>≦10%</td><td>0201≧0.1μF; 0402≧0.056μF; 0603≧0.47μF;
0805≧2.2μF; 1206≧4.7μF; 1210≧22μF</td></tr>
<tr><td>≦12.5%</td><td>0402≧0.33μF</td></tr>
<tr><td rowspan="2">16V</td><td rowspan="2">≦3.5%</td><td>≦5%</td><td>0201≧0.01μF; 0402≧0.033μF; 0603≧0.15μF;
0805≧0.68μF; 1206≧2.2μF; 1210≧4.7μF</td></tr>
<tr><td>≦10%</td><td>0201/X7R≧0.022μF; 0402≧0.15uF;
0603>0.47μF; 0805≧2.2μF; 1206≧4.7μF; 1210≧22μF</td></tr>
<tr><td rowspan="2">10V</td><td rowspan="2">≦5%</td><td>≦10%</td><td>0201≧0.012μF; 0402≧0.15μF;
0603≧0.33μF; 0805≧2.2μF; 1206≧2.2μF; 1210≧22μF</td></tr>
<tr><td>≦15%</td><td>0201≧0.1μF; 0402≧1μF</td></tr>
<tr><td rowspan="2">6.3V</td><td rowspan="2">≦10%</td><td>≦15%</td><td>0201≧0.1μF; 0402≧1μF; 0603≧10μF;
0805≧4.7μF; 1206≧47μF; 1210≧100μF</td></tr>
<tr><td>≦20%</td><td>0402≧2.2μF</td></tr>
<tr><td>4V</td><td>≦15%</td><td>---</td><td>---</td></tr>
</table>
* I.R.: ≥10GΩ or RxC≥500Ω-F whichever is smaller.
Class II (X7R/X6S)
<table>
<tr><th>Rated voltage</th><th>Insulation Resistance</th></tr>
<tr><td>100V: All X7R</td><td rowspan="7">10GΩ or RxC≥100 Ω-F whichever is smaller.</td></tr>
<tr><td>50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF</td></tr>
<tr><td>35V: 0805≥2.2μF;1206≥2.2μF;1210≥10μF</td></tr>
<tr><td>25V: 0402≥1μF;0603≥2.2μF;0805≥2.2μF;1206≥10μF;1210≥10μF</td></tr>
<tr><td>16V: 0201≥0.1μF,0402≥0.22μF;0603≥1μF;
0805≥2.2μF;1206≥10μF;1210≥47μF</td></tr>
<tr><td>10V: 0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF;
1206≥4.7μF;1210≥47μF</td></tr>
<tr><td>6.3V; 4V; Size≥1812</td></tr>
<tr><th>Rated voltage</th><th>Insulation Resistance</th></tr>
<tr><td>100V: 1210≥3.3μF</td><td rowspan="9">RxC≥50 Ω-F</td></tr>
<tr><td>50V: 0402≥0.1μF;0603≥2.2μF;0805≥10μF;1206≥10μF</td></tr>
<tr><td>35V: 0603≥1μF;</td></tr>
<tr><td>25V: 0201≥0.1μF;0402≥2.2μF;0603≥10μF;0805≥10μF;1206≥22μF</td></tr>
<tr><td>16V: 0603≥10μF;0402≥1μF;0201≥0.22μF</td></tr>
<tr><td>10V: 0201>0.1μF;0402≥1μF;0603≥10μF;0805≥47μF</td></tr>
<tr><td>6.3V: 0201≥0.1μF;0402≥1μF;0603>4.7μF;0805≥47μF;1206≥10μF</td></tr>
<tr><td>4V: 0603≥22μF;0805≥47μF;1206≥100μF</td></tr>
</table></td></tr>
</table>

* "Room condition" Temperature: 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

Copyright © by Walsin Technology Corporation. | All rights reserved.
Downloaded from Arrow.com.

<table>
<tr><th>No.</th><th>AEC-Q200 Test Item</th><th>AEC-Q200 Test Condition</th><th>Requirements</th></tr>
<tr><td>11.</td><td>Mechanical Shock
MIL-STD-202
Method 213</td><td>* Peak value: 1500g's.
* Wave: 1/2 sine.
* Velocity: 15.4 ft/sec
* Three shocks in each direction should be applied along
3 mutually perpendicular axes of the test specimen
(18 shocks)</td><td>* No remarkable damage.
* Cap.: within the specified tolerance.
* Q/D.F. value:
X8G/NPO: Cap≥30pF, Q≥1000 ; Cap<30pF, Q≥400+20C.
X7R/X6S:
<table>
<tr><th>Rated vol.</th><th>D.F.≦</th><th colspan="2">Exception of D.F. ≦</th></tr>
<tr><td rowspan="4">≧100V</td><td rowspan="4">≦2.5%</td><td>≦3%</td><td>1206≧0.47μF</td></tr>
<tr><td>≦3.5%</td><td>1812≧4.7μF;1825≥4.7μF;2220≥4.7μF;2225≥4.7μF</td></tr>
<tr><td>≦5%</td><td>0603≧0.068μF; 0805＞0.1μF; 1206≧1μF; 1210≧2.2μF;</td></tr>
<tr><td>≦10%</td><td>0805＞0.22μF; 1210≧3.3μF</td></tr>
<tr><td rowspan="4">50V</td><td rowspan="4">≦2.5%</td><td>≦3%</td><td>0201(50V); 0603≧0.047μF; 0805≧0.18μF; 1206≧0.47μF</td></tr>
<tr><td>≦3.5%</td><td>1812≧4.7μF;1825≥4.7μF;2220≥4.7μF;2225≥4.7μF</td></tr>
<tr><td>≦5%</td><td>0201≧0.01uF; 0402≥0.012μF; 1210≧3.3μF</td></tr>
<tr><td>≦10%</td><td>0402>0.047μF; 0603>0.1μF; 0805/X7R>0.47μF;
1206≧2.2μF; 1210≧10μF</td></tr>
<tr><td>35V</td><td>≦3.5%</td><td>≦10%</td><td>0603≧1μF; 0805≥2.2μF; 1206≧2.2μF; 1210≧10μF</td></tr>
<tr><td rowspan="4">25V</td><td rowspan="4">≦3.5%</td><td>≦5%</td><td>0201≧0.01μF; 0805≧1μF; 1210≧10μF</td></tr>
<tr><td>≦7%</td><td>0603≧0.33μF</td></tr>
<tr><td>≦10%</td><td>0201≧0.1μF; 0402≧0.056μF; 0603≧0.47μF;
0805≧2.2μF; 1206≧4.7μF; 1210≧22μF</td></tr>
<tr><td>≦12.5%</td><td>0402≧0.33μF</td></tr>
<tr><td rowspan="2">16V</td><td rowspan="2">≦3.5%</td><td>≦5%</td><td>0201≧0.01μF; 0402≧0.033μF; 0603≧0.15μF;
0805≧0.68μF; 1206≧2.2μF; 1210≧4.7μF</td></tr>
<tr><td>≦10%</td><td>0201/X7R≧0.022μF; 0402≧0.15uF;
0603>0.47μF; 0805≧2.2μF; 1206≧4.7μF; 1210≧22μF</td></tr>
<tr><td rowspan="2">10V</td><td rowspan="2">≦5%</td><td>≦10%</td><td>0201≧0.012μF; 0402≧0.15μF;
0603≧0.33μF; 0805≧2.2μF; 1206≧2.2μF; 1210≧22μF</td></tr>
<tr><td>≦15%</td><td>0201≧0.1μF; 0402≧1μF</td></tr>
<tr><td rowspan="3">6.3V</td><td rowspan="3">≦10%</td><td>≦15%</td><td>0201≧0.1μF; 0402≧1μF; 0603≧10μF;
0805≧4.7μF; 1206≧47μF; 1210≧100μF</td></tr>
<tr><td>≦20%</td><td>0402≧2.2μF</td></tr>
<tr><td>4V</td><td>≦15%</td><td>---</td><td>---</td></tr>
</table>
* I.R.: ≥10GΩ or RxC≥500Ω-F whichever is smaller.
Class II (X7R/X6S)
<table>
<tr><th>Rated voltage</th><th>Insulation Resistance</th></tr>
<tr><td>100V: All X7R</td><td rowspan="8">10GΩ or RxC≥100 Ω-F whichever is smaller.</td></tr>
<tr><td>50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF</td></tr>
<tr><td>35V: 0805≥2.2μF;1206≥2.2μF;1210≥10μF</td></tr>
<tr><td>25V: 0402≥1μF;0603≥2.2μF;0805≥2.2μF;1206≥10μF;1210≥10μF</td></tr>
<tr><td>16V: 0201≥0.1μF,0402≥0.22μF;0603≥1μF;
0805≥2.2μF;1206≥10μF;1210≥47μF</td></tr>
<tr><td>10V: 0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF;
1206≥4.7μF;1210≥47μF</td></tr>
<tr><td>6.3V; 4V; Size≥1812</td></tr>
<tr><td></td></tr>
<tr><th>Rated voltage</th><th>Insulation Resistance</th></tr>
<tr><td>100V: 1210≥3.3μF</td><td rowspan="8">RxC≥50 Ω-F</td></tr>
<tr><td>50V: 0402≥0.1μF;0603≥2.2μF;0805≥10μF;1206≥10μF</td></tr>
<tr><td>35V: 0603≥1μF;</td></tr>
<tr><td>25V: 0201≥0.1μF;0402≥2.2μF;0603≥10μF;0805≥10μF;1206≥22μF</td></tr>
<tr><td>16V: 0603≥10μF;0402≥1μF;0201≥0.22μF</td></tr>
<tr><td>10V: 0201>0.1μF;0402≥1μF;0603≥10μF;0805≥47μF</td></tr>
<tr><td>6.3V: 0201≥0.1μF;0402≥1μF;0603>4.7μF;0805≥47μF;1206≥10μF</td></tr>
<tr><td>4V: 0603≥22μF;0805≥47μF;1206≥100μF</td></tr>
</table></td></tr>
</table>

* "Room condition" Temperature: 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

Copyright © by Walsin Technology Corporation. | All rights reserved.
Downloaded from Arrow.com.

<table>
<tr><th>No.</th><th>AEC-Q200 Test Item</th><th>AEC-Q200 Test Condition</th><th>Requirements</th></tr>
<tr><td>12.</td><td>Vibration
MIL-STD-202
Method 204</td><td>* Vibration frequency: 10~2000 Hz/min.
(5g's for 20 min)
* Total amplitude: 1.5mm
* 12 cycles each of 3 orientations (36 times)</td><td>* No remarkable damage.
* Cap.: within the specified tolerance.
* Q/D.F. value:
X8G/NPO:Cap≥30pF, Q≥1000 ; Cap<30pF, Q≥400+20C.
X7R/X6S:
<table>
<tr><th>Rated vol.</th><th>D.F.≦</th><th colspan="2">Exception of D.F. ≦</th></tr>
<tr><td rowspan="4">≧100V</td><td rowspan="4">≦2.5%</td><td>≦3%</td><td>1206≧0.47μF</td></tr>
<tr><td>≦3.5%</td><td>1812≧4.7μF;1825≥4.7μF;2220≥4.7μF;2225≥4.7μF</td></tr>
<tr><td>≦5%</td><td>0603≧0.068μF; 0805＞0.1μF; 1206≧1μF; 1210≧2.2μF;</td></tr>
<tr><td>≦10%</td><td>0805＞0.22μF; 1210≧3.3μF</td></tr>
<tr><td rowspan="4">50V</td><td rowspan="4">≦2.5%</td><td>≦3%</td><td>0201(50V); 0603≧0.047μF; 0805≧0.18μF; 1206≧0.47μF</td></tr>
<tr><td>≦3.5%</td><td>1812≧4.7μF;1825≥4.7μF;2220≥4.7μF;2225≥4.7μF</td></tr>
<tr><td>≦5%</td><td>0201≧0.01uF; 0402≥0.012μF; 1210≧3.3μF</td></tr>
<tr><td>≦10%</td><td>0402>0.047μF; 0603>0.1μF; 0805/X7R>0.47μF;
1206≧2.2μF; 1210≧10μF</td></tr>
<tr><td>35V</td><td>≦3.5%</td><td>≦10%</td><td>0603≧1μF; 0805≥2.2μF; 1206≧2.2μF; 1210≧10μF</td></tr>
<tr><td rowspan="4">25V</td><td rowspan="4">≦3.5%</td><td>≦5%</td><td>0201≧0.01μF; 0805≧1μF; 1210≧10μF</td></tr>
<tr><td>≦7%</td><td>0603≧0.33μF</td></tr>
<tr><td>≦10%</td><td>0201≧0.1μF; 0402≧0.056μF; 0603≧0.47μF;
0805≧2.2μF; 1206≧4.7μF; 1210≧22μF</td></tr>
<tr><td>≦12.5%</td><td>0402≧0.33μF</td></tr>
<tr><td rowspan="2">16V</td><td rowspan="2">≦3.5%</td><td>≦5%</td><td>0201≧0.01μF; 0402≧0.033μF; 0603≧0.15μF;
0805≧0.68μF; 1206≧2.2μF; 1210≧4.7μF</td></tr>
<tr><td>≦10%</td><td>0201/X7R≧0.022μF; 0402≧0.15uF;
0603>0.47μF; 0805≧2.2μF; 1206≧4.7μF; 1210≧22μF</td></tr>
<tr><td rowspan="2">10V</td><td rowspan="2">≦5%</td><td>≦10%</td><td>0201≧0.012μF; 0402≧0.15μF;
0603≧0.33μF; 0805≧2.2μF; 1206≧2.2μF; 1210≧22μF</td></tr>
<tr><td>≦15%</td><td>0201≧0.1μF; 0402≧1μF</td></tr>
<tr><td rowspan="2">6.3V</td><td rowspan="2">≦10%</td><td>≦15%</td><td>0201≧0.1μF; 0402≧1μF; 0603≧10μF;
0805≧4.7μF; 1206≧47μF; 1210≧100μF</td></tr>
<tr><td>≦20%</td><td>0402≧2.2μF</td></tr>
<tr><td>4V</td><td>≦15%</td><td>---</td><td>---</td></tr>
</table>
* I.R.: ≥10GΩ or RxC≥500Ω-F whichever is smaller.
Class II (X7R/X6S)
<table>
<tr><th>Rated voltage</th><th>Insulation Resistance</th></tr>
<tr><td>100V: All X7R</td><td rowspan="8">10GΩ or RxC≥100 Ω-F whichever is smaller.</td></tr>
<tr><td>50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF</td></tr>
<tr><td>35V: 0805≥2.2μF;1206≥2.2μF;1210≥10μF</td></tr>
<tr><td>25V: 0402≥1μF;0603≥2.2μF;0805≥2.2μF;1206≥10μF;1210≥10μF</td></tr>
<tr><td>16V: 0201≥0.1μF,0402≥0.22μF;0603≥1μF;
0805≥2.2μF;1206≥10μF;1210≥47μF</td></tr>
<tr><td>10V: 0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF;
1206≥4.7μF;1210≥47μF</td></tr>
<tr><td>6.3V; 4V; Size≥1812</td></tr>
<tr><td></td></tr>
<tr><th>Rated voltage</th><th>Insulation Resistance</th></tr>
<tr><td>100V: 1210≥3.3μF</td><td rowspan="9">RxC≥50 Ω-F</td></tr>
<tr><td>50V: 0402≥0.1μF;0603≥2.2μF;0805≥10μF;1206≥10μF</td></tr>
<tr><td>35V: 0603≥1μF;</td></tr>
<tr><td>25V: 0201≥0.1μF;0402≥2.2μF;0603≥10μF;0805≥10μF;1206≥22μF</td></tr>
<tr><td>16V: 0603≥10μF;0402≥1μF;0201≥0.22μF</td></tr>
<tr><td>10V: 0201>0.1μF;0402≥1μF;0603≥10μF;0805≥47μF</td></tr>
<tr><td>6.3V: 0201≥0.1μF;0402≥1μF;0603>4.7μF;0805≥47μF;1206≥10μF</td></tr>
<tr><td>4V: 0603≥22μF;0805≥47μF;1206≥100μF</td></tr>
</table></td></tr>
</table>

* "Room condition" Temperature: 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

Copyright © by Walsin Technology Corporation. | All rights reserved.
Downloaded from Arrow.com.

<table>
<tr><th>No.</th><th>AEC-Q200 Test Item</th><th>AEC-Q200 Test Condition</th><th>Requirements</th></tr>
<tr><td>13.</td><td>Resistance to Soldering Heat
MIL-STD-202
Method 210</td><td>* Solder temperature: 260±5°C
* Dipping time: 10±1 sec
* Before initial measurement (X7R/X6S): Perform 150+0/-10°C for 1 hr and then set for 24±2 hrs at room temp.
* Measurement to be made after keeping at room temp. for 24±2 hrs.</td><td>* No remarkable damage.
* Cap change: X8G/NPO: within ±2.5% or 0.25pF whichever is larger
X7R/X6S: within ±7.5%
* Q/D.F. value:
X8G/NPO: Cap≥30pF, Q≥1000 ; Cap<30pF, Q≥400+20C.
X7R/X6S:
<table>
<tr><th>Rated vol.</th><th>D.F.≦</th><th colspan="2">Exception of D.F. ≦</th></tr>
<tr><td rowspan="4">≧100V</td><td rowspan="4">≦2.5%</td><td>≦3%</td><td>1206≧0.47μF</td></tr>
<tr><td>≦3.5%</td><td>1812≧4.7μF;1825≥4.7μF;2220≥4.7μF;2225≥4.7μF</td></tr>
<tr><td>≦5%</td><td>0603≧0.068μF; 0805＞0.1μF; 1206≧1μF; 1210≧2.2μF;</td></tr>
<tr><td>≦10%</td><td>0805＞0.22μF; 1210≧3.3μF</td></tr>
<tr><td rowspan="4">50V</td><td rowspan="4">≦2.5%</td><td>≦3%</td><td>0201(50V); 0603≧0.047μF; 0805≧0.18μF; 1206≧0.47μF</td></tr>
<tr><td>≦3.5%</td><td>1812≧4.7μF;1825≥4.7μF;2220≥4.7μF;2225≥4.7μF</td></tr>
<tr><td>≦5%</td><td>0201≧0.01uF; 0402≥0.012μF; 1210≧3.3μF</td></tr>
<tr><td>≦10%</td><td>0402>0.047μF; 0603>0.1μF; 0805/X7R>0.47μF;
1206≧2.2μF; 1210≧10μF</td></tr>
<tr><td>35V</td><td>≦3.5%</td><td>≦10%</td><td>0603≧1μF; 0805≥2.2μF; 1206≧2.2μF; 1210≧10μF</td></tr>
<tr><td rowspan="4">25V</td><td rowspan="4">≦3.5%</td><td>≦5%</td><td>0201≧0.01μF; 0805≧1μF; 1210≧10μF</td></tr>
<tr><td>≦7%</td><td>0603≧0.33μF</td></tr>
<tr><td>≦10%</td><td>0201≧0.1μF; 0402≧0.056μF; 0603≧0.47μF;
0805≧2.2μF; 1206≧4.7μF; 1210≧22μF</td></tr>
<tr><td>≦12.5%</td><td>0402≧0.33μF</td></tr>
<tr><td rowspan="2">16V</td><td rowspan="2">≦3.5%</td><td>≦5%</td><td>0201≧0.01μF; 0402≧0.033μF; 0603≧0.15μF;
0805≧0.68μF; 1206≧2.2μF; 1210≧4.7μF</td></tr>
<tr><td>≦10%</td><td>0201/X7R≧0.022μF; 0402≧0.15uF;
0603>0.47μF; 0805≧2.2μF; 1206≧4.7μF; 1210≧22μF</td></tr>
<tr><td rowspan="2">10V</td><td rowspan="2">≦5%</td><td>≦10%</td><td>0201≧0.012μF; 0402≧0.15μF;
0603≧0.33μF; 0805≧2.2μF; 1206≧2.2μF; 1210≧22μF</td></tr>
<tr><td>≦15%</td><td>0201≧0.1μF; 0402≧1μF</td></tr>
<tr><td rowspan="2">6.3V</td><td rowspan="2">≦10%</td><td>≦15%</td><td>0201≧0.1μF; 0402≧1μF; 0603≧10μF;
0805≧4.7μF; 1206≧47μF; 1210≧100μF</td></tr>
<tr><td>≦20%</td><td>0402≧2.2μF</td></tr>
<tr><td>4V</td><td>≦15%</td><td>---</td><td>---</td></tr>
</table>
* I.R.: ≥10GΩ or RxC≥500Ω-F whichever is smaller.
Class II (X7R/X6S)
<table>
<tr><th>Rated voltage</th><th>Insulation Resistance</th></tr>
<tr><td>100V: All X7R</td><td rowspan="7">10GΩ or RxC≥100 Ω-F whichever is smaller.</td></tr>
<tr><td>50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF</td></tr>
<tr><td>35V: 0805≥2.2μF;1206≥2.2μF;1210≥10μF</td></tr>
<tr><td>25V: 0402≥1μF;0603≥2.2μF;0805≥2.2μF;1206≥10μF;1210≥10μF</td></tr>
<tr><td>16V: 0201≥0.1μF;0402≥0.22μF;0603≥1μF;
0805≥2.2μF;1206≥10μF;1210≥47μF</td></tr>
<tr><td>10V: 0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF;
1206≥4.7μF;1210≥47μF</td></tr>
<tr><td>6.3V; 4V; Size≥1812</td></tr>
</table>
<table>
<tr><th>Rated voltage</th><th>Insulation Resistance</th></tr>
<tr><td>100V: 1210≥3.3μF</td><td rowspan="9">RxC≥50 Ω-F</td></tr>
<tr><td>50V: 0402≥0.1μF;0603≥2.2μF;0805≥10μF;1206≥10μF</td></tr>
<tr><td>35V: 0603≥1μF;</td></tr>
<tr><td>25V: 0201≥0.1μF;0402≥2.2μF;0603≥10μF;0805≥10μF;1206≥22μF</td></tr>
<tr><td>16V: 0603≥10μF;0402≥1μF;0201≥0.22μF</td></tr>
<tr><td>10V: 0201>0.1μF;0402≥1μF;0603≥10μF;0805≥47μF</td></tr>
<tr><td>6.3V: 0201≥0.1μF;0402≥1μF;0603>4.7μF;0805≥47μF;1206≥10μF</td></tr>
<tr><td>4V: 0603≥22μF;0805≥47μF;1206≥100μF</td></tr>
</table></td></tr>
</table>

* "Room condition" Temperature: 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

Copyright © by Walsin Technology Corporation. | All rights reserved.
Downloaded from Arrow.com.

<table>
<tr><th>No.</th><th>AEC-Q200
Test Item</th><th>AEC-Q200 Test Condition</th><th>Requirements</th></tr>
<tr><td>14</td><td>Thermal Shock
MIL-STD-202
Method 107</td><td>* Conduct 300 cycles according to the temperatures and time.
<table>
<tr><th>Step</th><th>Temp. (°C)</th><th>Time (min.)</th></tr>
<tr><td>1</td><td>Min. operating temp +0/-3</td><td>15±3</td></tr>
<tr><td>2</td><td>Max. operating temp +3/-0</td><td>15±3</td></tr>
</table>
* Max. transfer time: 20 sec.
* Before initial measurement (X7R/X6S): Perform 150+0/-10°C for 1 hr and then set for 24±2 hrs at room temp.
* Measurement to be made after keeping at room temp. for 24±2 hrs.</td><td>* No remarkable damage.
* Cap change：X8G/NPO: within ±2.5% or 0.25pF whichever is larger
X7R/X6S: within ±10.0%
* Q/D.F. value:
X8G/NPO: Cap≥30pF, Q≥1000 ; Cap<30pF, Q≥400+20C.
X7R/X6S:
<table>
<tr><th>Rated vol.</th><th>D.F.≦</th><th colspan="2">Exception of D.F. ≦</th></tr>
<tr><td rowspan="4">≧100V</td><td rowspan="4">≦2.5%</td><td>≦3%</td><td>1206≧0.47μF</td></tr>
<tr><td>≦3.5%</td><td>1812≧4.7μF;1825≥4.7μF;2220≥4.7μF;2225≥4.7μF</td></tr>
<tr><td>≦5%</td><td>0603≧0.068μF; 0805＞0.1μF; 1206≧1μF; 1210≧2.2μF;</td></tr>
<tr><td>≦10%</td><td>0805＞0.22μF; 1210≧3.3μF</td></tr>
<tr><td rowspan="4">50V</td><td rowspan="4">≦2.5%</td><td>≦3%</td><td>0201(50V); 0603≧0.047μF; 0805≧0.18μF; 1206≧0.47μF</td></tr>
<tr><td>≦3.5%</td><td>1812≧4.7μF;1825≥4.7μF;2220≥4.7μF;2225≥4.7μF</td></tr>
<tr><td>≦5%</td><td>0201≧0.01uF; 0402≥0.012μF; 1210≧3.3μF</td></tr>
<tr><td>≦10%</td><td>0402>0.047μF; 0603>0.1μF; 0805/X7R>0.47μF;
1206≧2.2μF; 1210≧10μF</td></tr>
<tr><td>35V</td><td>≦3.5%</td><td>≦10%</td><td>0603≧1μF; 0805≥2.2μF; 1206≧2.2μF; 1210≧10μF</td></tr>
<tr><td rowspan="4">25V</td><td rowspan="4">≦3.5%</td><td>≦5%</td><td>0201≧0.01μF; 0805≧1μF; 1210≧10μF</td></tr>
<tr><td>≦7%</td><td>0603≧0.33μF</td></tr>
<tr><td>≦10%</td><td>0201≧0.1μF; 0402≧0.056μF; 0603≧0.47μF;
0805≧2.2μF; 1206≧4.7μF; 1210≧22μF</td></tr>
<tr><td>≦12.5%</td><td>0402≧0.33μF</td></tr>
<tr><td rowspan="2">16V</td><td rowspan="2">≦3.5%</td><td>≦5%</td><td>0201≧0.01μF; 0402≧0.033μF; 0603≧0.15μF;
0805≧0.68μF; 1206≧2.2μF; 1210≧4.7μF</td></tr>
<tr><td>≦10%</td><td>0201/X7R≧0.022μF; 0402≧0.15uF;
0603>0.47μF; 0805≧2.2μF; 1206≧4.7μF; 1210≧22μF</td></tr>
<tr><td rowspan="2">10V</td><td rowspan="2">≦5%</td><td>≦10%</td><td>0201≧0.012μF; 0402≧0.15μF;
0603≧0.33μF; 0805≧2.2μF; 1206≧2.2μF; 1210≧22μF</td></tr>
<tr><td>≦15%</td><td>0201≧0.1μF; 0402≧1μF</td></tr>
<tr><td rowspan="2">6.3V</td><td rowspan="2">≦10%</td><td>≦15%</td><td>0201≧0.1μF; 0402≧1μF; 0603≧10μF;
0805≧4.7μF; 1206≧47μF; 1210≧100μF</td></tr>
<tr><td>≦20%</td><td>0402≧2.2μF</td></tr>
<tr><td>4V</td><td>≦15%</td><td>---</td><td>---</td></tr>
</table>
* I.R.: ≥10GΩ or RxC≥500Ω-F whichever is smaller.
Class II (X7R/X6S)
<table>
<tr><th>Rated voltage</th><th>Insulation Resistance</th></tr>
<tr><td>100V: All X7R;1210≥3.3μF</td><td rowspan="6">1GΩ or RxC≥10 Ω-F whichever is smaller.</td></tr>
<tr><td>50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF</td></tr>
<tr><td>35V: 0603≥1μF;0805≥2.2μF;1206≥2.2μF;1210≥10μF</td></tr>
<tr><td>25V: 0201≥0.1uF;0402≥0.22μF;0603≥2.2μF;0805≥2.2μF;
1206≥10μF;1210≥10μF</td></tr>
<tr><td>16V: 0201≥0.1uF;0402≥0.22μF;0603≥1μF;0805≥2.2μF;
1206≥10μF;1210≥47μF</td></tr>
<tr><td>10V: 0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF;
1206≥4.7μF;1210≥47μF</td></tr>
<tr><td>6.3V; 4V; Size≥1812</td><td></td></tr>
</table></td></tr>
</table>

* "Room condition" Temperature: 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

Copyright © by Walsin Technology Corporation. | All rights reserved.
Downloaded from Arrow.com.

<table>
<tr><th>No.</th><th>AEC-Q200 Test Item</th><th>AEC-Q200 Test Condition</th><th>Requirements</th></tr>
<tr><td>15.</td><td>ESD
AEC-Q200-002</td><td>Per AEC-Q200-002</td><td>
* No remarkable damage.
* Cap.: within the specified tolerance.
* Q/D.F. value:
X8G/NPO: Cap≥30pF, Q≥1000 ; Cap<30pF, Q≥400+20C.
X7R/X6S:
<table>
<tr><th>Rated vol.</th><th>D.F.≦</th><th colspan="2">Exception of D.F. ≦</th></tr>
<tr><td rowspan="4">≧100V</td><td rowspan="4">≦2.5%</td><td>≦3%</td><td>1206≧0.47μF</td></tr>
<tr><td>≦3.5%</td><td>1812≧4.7μF;1825≥4.7μF;2220≥4.7μF;2225≥4.7μF</td></tr>
<tr><td>≦5%</td><td>0603≧0.068μF; 0805＞0.1μF; 1206≧1μF; 1210≧2.2μF;</td></tr>
<tr><td>≦10%</td><td>0805＞0.22μF; 1210≧3.3μF</td></tr>
<tr><td rowspan="4">50V</td><td rowspan="4">≦2.5%</td><td>≦3%</td><td>0201(50V); 0603≧0.047μF; 0805≧0.18μF; 1206≧0.47μF</td></tr>
<tr><td>≦3.5%</td><td>1812≧4.7μF;1825≥4.7μF;2220≥4.7μF;2225≥4.7μF</td></tr>
<tr><td>≦5%</td><td>0201≧0.01uF; 0402≥0.012μF; 1210≧3.3μF</td></tr>
<tr><td>≦10%</td><td>0402>0.047μF; 0603>0.1μF; 0805/X7R>0.47μF;
1206≧2.2μF; 1210≧10μF</td></tr>
<tr><td>35V</td><td>≦3.5%</td><td>≦10%</td><td>0603≧1μF; 0805≥2.2μF; 1206≧2.2μF; 1210≧10μF</td></tr>
<tr><td rowspan="4">25V</td><td rowspan="4">≦3.5%</td><td>≦5%</td><td>0201≧0.01μF; 0805≧1μF; 1210≧10μF</td></tr>
<tr><td>≦7%</td><td>0603≧0.33μF</td></tr>
<tr><td>≦10%</td><td>0201≧0.1μF; 0402≧0.056μF; 0603≧0.47μF;
0805≧2.2μF; 1206≧4.7μF; 1210≧22μF</td></tr>
<tr><td>≦12.5%</td><td>0402≧0.33μF</td></tr>
<tr><td rowspan="2">16V</td><td rowspan="2">≦3.5%</td><td>≦5%</td><td>0201≧0.01μF; 0402≧0.033μF; 0603≧0.15μF;
0805≧0.68μF; 1206≧2.2μF; 1210≧4.7μF</td></tr>
<tr><td>≦10%</td><td>0201/X7R≧0.022μF; 0402≧0.15uF;
0603>0.47μF; 0805≧2.2μF; 1206≧4.7μF; 1210≧22μF</td></tr>
<tr><td rowspan="2">10V</td><td rowspan="2">≦5%</td><td>≦10%</td><td>0201≧0.012μF; 0402≧0.15μF;
0603≧0.33μF; 0805≧2.2μF; 1206≧2.2μF; 1210≧22μF</td></tr>
<tr><td>≦15%</td><td>0201≧0.1μF; 0402≧1μF</td></tr>
<tr><td rowspan="2">6.3V</td><td rowspan="2">≦10%</td><td>≦15%</td><td>0201≧0.1μF; 0402≧1μF; 0603≧10μF;
0805≧4.7μF; 1206≧47μF; 1210≧100μF</td></tr>
<tr><td>≦20%</td><td>0402≧2.2μF</td></tr>
<tr><td>4V</td><td>≦15%</td><td>---</td><td>---</td></tr>
</table>
* I.R.: ≥10GΩ or RxC≥500Ω-F whichever is smaller.
Class II (X7R/X6S)
<table>
<tr><th>Rated voltage</th><th>Insulation Resistance</th></tr>
<tr><td>100V: All X7R</td><td rowspan="7">10GΩ or RxC≥100 Ω-F whichever is smaller.</td></tr>
<tr><td>50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF</td></tr>
<tr><td>35V: 0805≥2.2μF;1206≥2.2μF;1210≥10μF</td></tr>
<tr><td>25V: 0402≥1μF;0603≥2.2μF;0805≥2.2μF;1206≥10μF;1210≥10μF</td></tr>
<tr><td>16V: 0201≥0.1μF,0402≥0.22μF;0603≥1μF;
0805≥2.2μF;1206≥10μF;1210≥47μF</td></tr>
<tr><td>10V: 0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF;
1206≥4.7μF;1210≥47μF</td></tr>
<tr><td>6.3V; 4V; Size≥1812</td></tr>
<tr><th>Rated voltage</th><th>Insulation Resistance</th></tr>
<tr><td>100V: 1210≥3.3μF</td><td rowspan="9">RxC≥50 Ω-F</td></tr>
<tr><td>50V: 0402≥0.1μF;0603≥2.2μF;0805≥10μF;1206≥10μF</td></tr>
<tr><td>35V: 0603≥1μF;</td></tr>
<tr><td>25V: 0201≥0.1μF;0402≥2.2μF;0603≥10μF;0805≥10μF;1206≥22μF</td></tr>
<tr><td>16V: 0603≥10μF;0402≥1μF;0201≥0.22μF</td></tr>
<tr><td>10V: 0201>0.1μF;0402≥1μF;0603≥10μF;0805≥47μF</td></tr>
<tr><td>6.3V: 0201≥0.1μF;0402≥1μF;0603>4.7μF;0805≥47μF;1206≥10μF</td></tr>
<tr><td>4V: 0603≥22μF;0805≥47μF;1206≥100μF</td></tr>
</table>
</td></tr>
<tr><td>16.</td><td>Solderability
J-STD-002
JESD22-B102E</td><td>
* Condition A
Un-mounted chips 4hrs / 155°C*dry then completely immersed for 5±0.5 sec in solder bath at 235±5°C.
* Condition B
Un-mounted chips steam 8 hrs then completely immersed for 10±1sec in solder bath at 215+5/-0°C.
* Condition C
Un-mounted chips steam 8 hrs then completely immersed for 10±1 sec. in solder bath at 260+0/-5°C.
</td><td>All terminations shall exhibit a continuous solder coating free from defects from a minimum of 95% of the critical surface area of any individual termination.</td></tr>
</table>

* "Room condition" Temperature: 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

Copyright © by Walsin Technology Corporation. | All rights reserved.
Downloaded from Arrow.com.

<table>
<tr><th>No.</th><th>AEC-Q200 Test Item</th><th>AEC-Q200 Test Condition</th><th>Requirements</th></tr>
<tr><td>17.</td><td>Electrical Characterization</td><td>* Capacitance
* Q/ D.F. (Dissipation Factor)
*Test temp.: Room Temperature.
Class I: (X8G/NP0)
Cap≤1000pF 1.0±0.2Vrms, 1MHz±10%
Cap>1000pF 1.0±0.2Vrms, 1KHz±10%
Class II: (X7R/X6S)
Cap ≤10μF, 1.0±0.2Vrms，1KHz±10%**
Cap＞10μF, 0.5±0.2Vrms，120Hz±20%</td><td>* Capacitance within the specified tolerance.
* Q/D.F. value:
X8G/NPO: Cap≥30pF, Q≥1000 ; Cap<30pF, Q≥400+20C.
X7R/X6S:
<table>
<tr><th>Rated vol.</th><th>D.F.≦</th><th colspan="2">Exception of D.F. ≦</th></tr>
<tr><td rowspan="4">≧100V</td><td rowspan="4">≦2.5%</td><td>≦3%</td><td>1206≧0.47μF</td></tr>
<tr><td>≦3.5%</td><td>1812≧4.7μF;1825≥4.7μF;2220≥4.7μF;2225≥4.7μF</td></tr>
<tr><td>≦5%</td><td>0603≧0.068μF; 0805＞0.1μF; 1206≧1μF; 1210≧2.2μF;</td></tr>
<tr><td>≦10%</td><td>0805＞0.22μF; 1210≧3.3μF</td></tr>
<tr><td rowspan="4">50V</td><td rowspan="4">≦2.5%</td><td>≦3%</td><td>0201(50V); 0603≧0.047μF; 0805≧0.18μF; 1206≧0.47μF</td></tr>
<tr><td>≦3.5%</td><td>1812≧4.7μF;1825≥4.7μF;2220≥4.7μF;2225≥4.7μF</td></tr>
<tr><td>≦5%</td><td>0201≧0.01uF; 0402≥0.012μF; 1210≧3.3μF</td></tr>
<tr><td>≦10%</td><td>0402>0.047μF; 0603>0.1μF; 0805/X7R>0.47μF;
1206≧2.2μF; 1210≧10μF</td></tr>
<tr><td>35V</td><td>≦3.5%</td><td>≦10%</td><td>0603≧1μF; 0805≥2.2μF; 1206≧2.2μF; 1210≧10μF</td></tr>
<tr><td rowspan="4">25V</td><td rowspan="4">≦3.5%</td><td>≦5%</td><td>0201≧0.01μF; 0805≧1μF; 1210≧10μF</td></tr>
<tr><td>≦7%</td><td>0603≧0.33μF</td></tr>
<tr><td>≦10%</td><td>0201≧0.1μF; 0402≧0.056μF; 0603≧0.47μF;
0805≧2.2μF; 1206≧4.7μF; 1210≧22μF</td></tr>
<tr><td>≦12.5%</td><td>0402≧0.33μF</td></tr>
<tr><td rowspan="2">16V</td><td rowspan="2">≦3.5%</td><td>≦5%</td><td>0201≧0.01μF; 0402≧0.033μF; 0603≧0.15μF;
0805≧0.68μF; 1206≧2.2μF; 1210≧4.7μF</td></tr>
<tr><td>≦10%</td><td>0201/X7R≧0.022μF; 0402≧0.15uF;
0603>0.47μF; 0805≧2.2μF; 1206≧4.7μF; 1210≧22μF</td></tr>
<tr><td rowspan="2">10V</td><td rowspan="2">≦5%</td><td>≦10%</td><td>0201≧0.012μF; 0402≧0.15μF;
0603≧0.33μF; 0805≧2.2μF; 1206≧2.2μF; 1210≧22μF</td></tr>
<tr><td>≦15%</td><td>0201≧0.1μF; 0402≧1μF</td></tr>
<tr><td rowspan="2">6.3V</td><td rowspan="2">≦10%</td><td>≦15%</td><td>0201≧0.1μF; 0402≧1μF; 0603≧10μF;
0805≧4.7μF; 1206≧47μF; 1210≧100μF</td></tr>
<tr><td>≦20%</td><td>0402≧2.2μF</td></tr>
<tr><td>4V</td><td>≦15%</td><td>---</td><td>---</td></tr>
</table>
* Insulation Resistance
*Test temp.: Room Temperature.
100V:To apply rated voltage for max. 120 sec.
≥200V:To apply rated voltage (Max.500V) for 60 sec.
* Dielectric Strength
To apply voltage:
≦100 ≥2.5 times VDC
200V~300V ≥2 times VDC
400V~450V ≥1.2 times VDC
500V~999V ≥1.5 times VDC
1000V~3000V ≥1.2 times VDC
, duration 1~5 sec,
charge and discharge current less than 50mA.
* For high voltage product over 1000 Vdc, it is required to immerse the chip in an isolation fluid to prevent possible arcing while testing.
* Temperature Coefficient (with no electrical load)
Operation temperature: Min. operating temp. to Max. operating temp. at 25°C</td><td>* IR. ≥10GΩ or RxC≥500Ω-F whichever is smaller.
Class II (X7R/X6S)
<table>
<tr><th>Rated voltage</th><th>Insulation Resistance</th></tr>
<tr><td>100V: All X7R</td><td rowspan="7">10GΩ or RxC≥100 Ω-F whichever is smaller.</td></tr>
<tr><td>50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF</td></tr>
<tr><td>35V: 0805≥2.2μF;1206≥2.2μF;1210≥10μF</td></tr>
<tr><td>25V: 0402≥1μF;0603≥2.2μF;0805≥2.2μF;1206≥10μF;1210≥10μF</td></tr>
<tr><td>16V: 0201≥0.1μF;0402≥0.22μF;0603≥1μF;
0805≥2.2μF;1206≥10μF;1210≥47μF</td></tr>
<tr><td>10V: 0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF;
1206≥4.7μF;1210≥47μF</td></tr>
<tr><td>6.3V; 4V; Size≥1812</td></tr>
</table>
<table>
<tr><th>Rated voltage</th><th>Insulation Resistance</th></tr>
<tr><td>100V: 1210≥3.3μF</td><td rowspan="8">RxC≥50 Ω-F</td></tr>
<tr><td>50V: 0402≥0.1μF;0603≥2.2μF;0805≥10μF;1206≥10μF</td></tr>
<tr><td>35V: 0603≥1μF;</td></tr>
<tr><td>25V: 0201≥0.1μF;0402≥2.2μF;0603≥10μF;0805≥10μF;1206≥22μF</td></tr>
<tr><td>16V: 0603≥10μF;0402≥1μF;0201≥0.22μF</td></tr>
<tr><td>10V: 0201>0.1μF;0402≥1μF;0603≥10μF;0805≥47μF</td></tr>
<tr><td>6.3V: 0201≥0.1μF;0402≥1μF;0603>4.7μF;0805≥47μF;1206≥10μF</td></tr>
<tr><td>4V: 0603≥22μF;0805≥47μF;1206≥100μF</td></tr>
</table>
* Dielectric strength
No evidence of damage or flash over during test.
* Temperature Coefficient
Capacitance Change: NPO: Within ±30ppm/°C
X7R: Within ±15%; X6S: Within ±22%</td></tr>
</table>

* "Room condition" Temperature: 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

Copyright © by Walsin Technology Corporation. | All rights reserved.
Downloaded from Arrow.com.

<table>
<tr><th>No.</th><th>AEC-Q200
Test Item</th><th>AEC-Q200 Test Condition</th><th>Requirements</th></tr>
<tr><td>18.</td><td>Board Flex
AEC-Q200-005</td><td>* The middle part of substrate shall be pressurized by means of the pressurizing rod at a rate of about 1 mm per second until the deflection becomes 3mm (2mm for X7R/X6S) and then the pressure shall be maintained for 60±1 sec.
* Measurement to be made after keeping at room temp. for 24±2 hrs.</td><td>* No remarkable damage.
* Cap change： X8G/NPO: within ±5% or 0.5pF whichever is larger
X7R/X6S: within ±12.5%
(This capacitance change means the change of capacitance under specified flexure of substrate from the capacitance measured before the test.)</td></tr>
<tr><td>19.</td><td>Terminal Strength
AEC-Q200-006</td><td>* Pressurizing force：2N (0201 & 0402), 10N(0603), 18N(≥0805).
* Test time: 60±1 sec.</td><td>* No remarkable damage or removal of the terminations.
* Capacitance within the specified tolerance.
* Q/D.F. value:
X8G/NPO: Cap≥30pF, Q≥1000 ; Cap<30pF, Q≥400+20C.
X7R/X6S:
<table>
<tr><th>Rated vol.</th><th>D.F.≦</th><th colspan="2">Exception of D.F. ≦</th></tr>
<tr><td rowspan="4">≧100V</td><td rowspan="4">≦2.5%</td><td>≦3%</td><td>1206≧0.47μF</td></tr>
<tr><td>≦3.5%</td><td>1812≧4.7μF;1825≥4.7μF;2220≥4.7μF;2225≥4.7μF</td></tr>
<tr><td>≦5%</td><td>0603≧0.068μF; 0805＞0.1μF; 1206≧1μF; 1210≧2.2μF;</td></tr>
<tr><td>≦10%</td><td>0805＞0.22μF; 1210≧3.3μF</td></tr>
<tr><td rowspan="4">50V</td><td rowspan="4">≦2.5%</td><td>≦3%</td><td>0201(50V); 0603≧0.047μF; 0805≧0.18μF; 1206≧0.47μF</td></tr>
<tr><td>≦3.5%</td><td>1812≧4.7μF;1825≥4.7μF;2220≥4.7μF;2225≥4.7μF</td></tr>
<tr><td>≦5%</td><td>0201≧0.01uF; 0402≥0.012μF; 1210≧3.3μF</td></tr>
<tr><td>≦10%</td><td>0402>0.047μF; 0603>0.1μF; 0805/X7R>0.47μF;
1206≧2.2μF; 1210≧10μF</td></tr>
<tr><td>35V</td><td>≦3.5%</td><td>≦10%</td><td>0603≧1μF; 0805≥2.2μF; 1206≧2.2μF; 1210≧10μF</td></tr>
<tr><td rowspan="4">25V</td><td rowspan="4">≦3.5%</td><td>≦5%</td><td>0201≧0.01μF; 0805≧1μF; 1210≧10μF</td></tr>
<tr><td>≦7%</td><td>0603≧0.33μF</td></tr>
<tr><td>≦10%</td><td>0201≧0.1μF; 0402≧0.056μF; 0603≧0.47μF;
0805≧2.2μF; 1206≧4.7μF; 1210≧22μF</td></tr>
<tr><td>≦12.5%</td><td>0402≧0.33μF</td></tr>
<tr><td rowspan="2">16V</td><td rowspan="2">≦3.5%</td><td>≦5%</td><td>0201≧0.01μF; 0402≧0.033μF; 0603≧0.15μF;
0805≧0.68μF; 1206≧2.2μF; 1210≧4.7μF</td></tr>
<tr><td>≦10%</td><td>0201/X7R≧0.022μF; 0402≧0.15uF;
0603>0.47μF; 0805≧2.2μF; 1206≧4.7μF; 1210≧22μF</td></tr>
<tr><td rowspan="2">10V</td><td rowspan="2">≦5%</td><td>≦10%</td><td>0201≧0.012μF; 0402≧0.15μF;
0603≧0.33μF; 0805≧2.2μF; 1206≧2.2μF; 1210≧22μF</td></tr>
<tr><td>≦15%</td><td>0201≧0.1μF; 0402≧1μF</td></tr>
<tr><td rowspan="2">6.3V</td><td rowspan="2">≦10%</td><td>≦15%</td><td>0201≧0.1μF; 0402≧1μF; 0603≧10μF;
0805≧4.7μF; 1206≧47μF; 1210≧100μF</td></tr>
<tr><td>≦20%</td><td>0402≧2.2μF</td></tr>
<tr><td>4V</td><td>≦15%</td><td>---</td><td>---</td></tr>
</table></td></tr>
<tr><td>20</td><td>Beam Load Test
AEC-Q200-003</td><td>* Break strength test
* Beam speed: 2.5±0.25 mm/sec</td><td>The chip endure following force
* Chip length ≤2.5mm: Thickness >0.5mm (20N), ≤0.5mm (8N)
* Chip length ≥3.2mm: Thickness ≥1.25mm (54.5N), <1.25mm (15N)</td></tr>
</table>

* "Room condition" Temperature: 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

Copyright © by Walsin Technology Corporation. | All rights reserved.
Downloaded from Arrow.com.

APPENDIXES

◙ Tape & reel dimensions

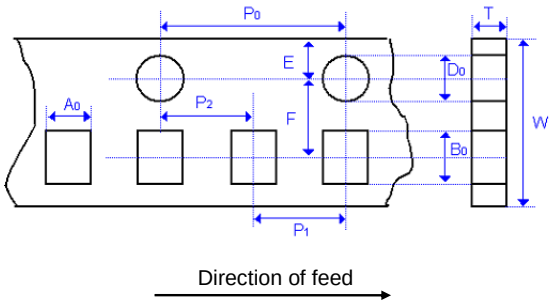


Fig. 2 The dimension of paper tape

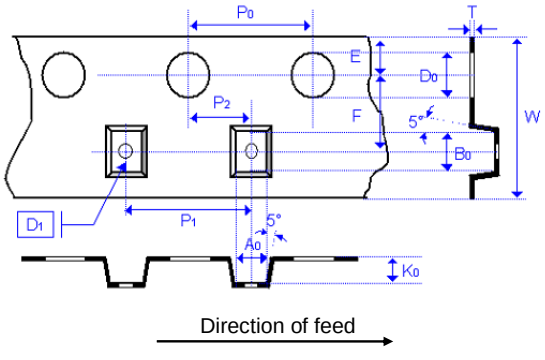


Fig. 3 The dimension of plastic tape

Size	0201	0402	0603	0805			1206			1210				1808		1812		
Thickness	L	N,E	S,H,X	A,H	B,T	D,I	B,T	C,J,D	G,P	T	C,D	G,K	M	D,F	G,K	D,F	G,K	M,U
A_0	0.40 +/-0.10	0.70 +/-0.20	1.05 +/-0.30	1.50 +/-0.20	1.50 +/-0.20	< 1.80	1.90 +/-0.50	< 2.00	<2.30	< 3.05	< 3.05	< 3.05	< 3.20	< 2.50	< 2.50	< 3.90	< 3.90	< 3.90
B_0	0.70 +/-0.10	1.20 +/-0.20	1.80 +/-0.30	2.30 +/-0.20	2.30 +/-0.20	< 2.70	3.50 +/-0.50	< 3.70	< 4.00	< 3.80	< 3.80	< 3.80	<4.00	< 5.30	< 5.30	< 5.30	< 5.30	< 5.30
T	≦0.55	≦0.80	≦1.20	≦1.15	≦1.20	0.23 +/-0.1	≦1.20	0.23 +/-0.1	0.23 +/-0.1	0.23 +/-0.1	0.23 +/-0.1	0.23 +/-0.1	0.23 +/-0.1	0.25 +/-0.1	0.25 +/-0.1	0.25 +/-0.1	0.25 +/-0.1	0.25 +/-0.1
K_0		-	-	-	-	< 2.50	-	< 2.50	< 2.50	< 1.50	< 2.00	< 2.50	< 3.20	< 2.50	< 2.50	< 2.50	< 2.50	< 3.50
W	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	12.00 +/-0.30	12.00 +/-0.30	12.00 +/-0.30	12.00 +/-0.30	12.00 +/-0.30
P_0	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10
$10xP_0$	40.00 +/-0.10	40.00 +/-0.10	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20
P_1	2.00 +/-0.05	2.00 +/-0.05	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	8.00 +/-0.10	8.00 +/-0.10	8.00 +/-0.10
P_2	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.10	2.00 +/-0.10	2.00 +/-0.10	2.00 +/-0.10	2.00 +/-0.10
D_0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0
D_1	-	-	-	-	-	1.00 +/-0.10	-	1.00 +/-0.10	1.00 +/-0.10	1.00 +/-0.10	1.00 +/-0.10	1.00 +/-0.10	1.00 +/-0.10	1.50 +/-0.10	1.50 +/-0.10	1.50 +/-0.10	1.50 +/-0.10	1.50 +/-0.10
E	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10
F	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	5.50 +/-0.10	5.50 +/-0.10	5.50 +/-0.10	5.50 +/-0.10	5.50 +/-0.10


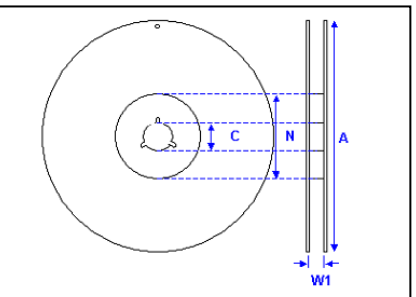


Fig. 4 The dimension of reel

Size	0201, 0402, 0603, 0805, 1206, 1210			1812
Reel size	7"	10"	13"	7"
C	13.0±0.5	13.0±0.5	13.0±0.5	13.0±0.5
W_1	10.0±1.5	10.0±1.5	10.0±1.5	12.4+2.0/-0
A	178.0±2.0	250.0±2.0	330.0±2.0	178.0±2.0
N	60.0+1.0/-0	50 min	50 min	60.0+1.0/-0


◙ Peeling force (EIA-481)

Peel-off force should be in the range of 10 grams to 100 grams at a peel-off speed of 300±10 mm/min.

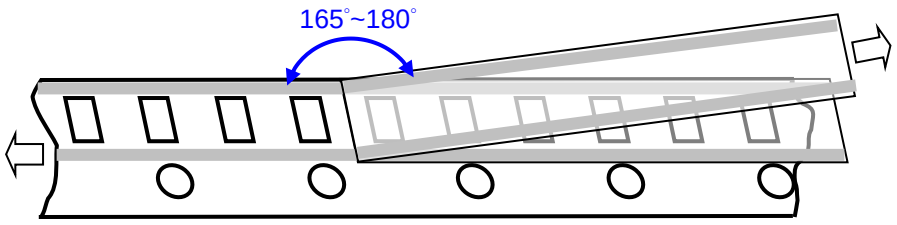

Copyright © by Walsin Technology Corporation. | All rights reserved.
Downloaded from Arrow.com.

◙ Example of customer label

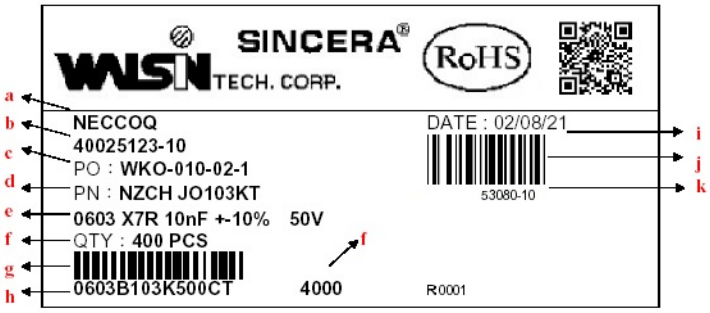

*Customized label is available upon request

a. Customer name
b. WTC order series and item number
c. Customer P/O
d. Customer P/N
e. Description of product
f. Quantity
g. Bar code including quantity & WTC P/N or customer
h. WTC P/N
i. Shipping date
j. Order bar code including series and item numbers
k. Serial number of label

◙ Constructions

No.	Name		X8G, NP0	X7R, X6S
①	Ceramic material		$CaZrO_3$ based	$BaTiO_3$ based
②	Inner electrode		Ni	
③	Termination	Inner layer	Cu	
④		Middle layer	Ni	
⑤		Outer layer	Sn (Matt)	

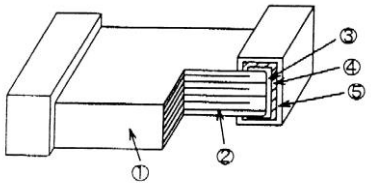


Fig. 5 The construction of MLCC

◙ Storage and handling conditions

(1) To store products at 5 to 40°C ambient temperature and 20 to 70% related humidity conditions; MSL Level 1.
(2) The product is recommended to be used within one year after shipment. Check solderability in case of shelf life extension is needed.

Cautions:

a. The corrosive gas reacts on the terminal electrodes of capacitors, and results in the poor solderability. Do not store the capacitors in the ambience of corrosive gas (e.g., hydrogen sulfide, sulfur dioxide, chlorine, ammonia gas etc.)
b. In corrosive atmosphere, solderability might be degraded, and silver migration might occur to cause low reliability.
c. Due to the dewing by rapid humidity change, or the photochemical change of the terminal electrode by direct sunlight,the solderability and electrical performance may deteriorate. Do not store capacitors under direct sunlight or dewing condition. To store products on the shelf and avoid exposure to moisture.

Copyright © by Walsin Technology Corporation. | All rights reserved.
Downloaded from Arrow.com.

◙ Recommended soldering conditions

The lead-free termination MLCCs are not only to be used on SMT against lead-free solder paste, but also suitable against lead-containing solder paste. If the optimized solder joint is requested, increasing soldering time, temperature and concentration of N_2 within oven are recommended.

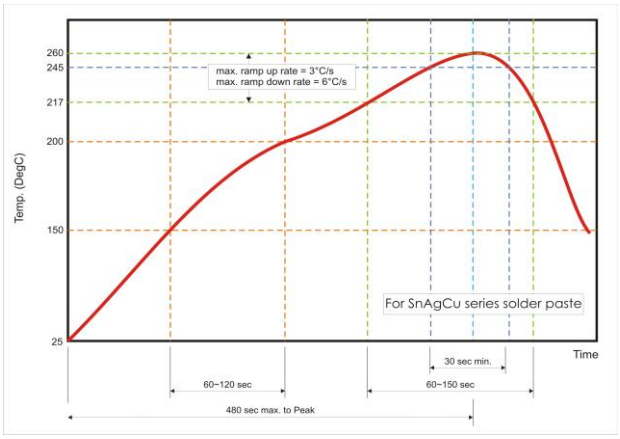


Fig. 5 Recommended reflow soldering profile for SMT process with SnAgCu series solder paste.

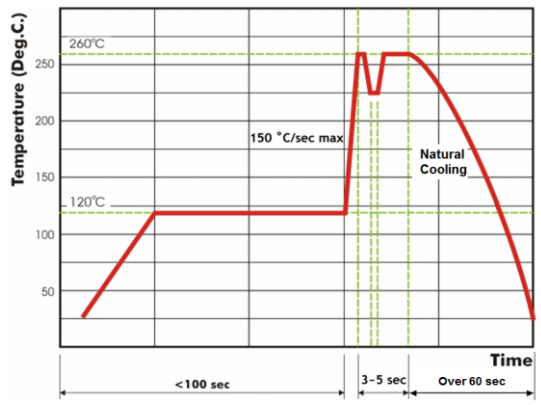


Fig. 6 Recommended wave soldering profile for SMT process with SnAgCu series solder.

著作權所有 侵害必究
華新科技股份有限公司
PSA
PASSIVE SYSTEM ALLIANCE
Walsin Technology Corporation
COPYRIGHT © WALSIN TECHNOLOGY CORPORATION. ALL RIGHTS RESERVED.

Copyright © by Walsin Technology Corporation. | All rights reserved.
Downloaded from Arrow.com.