


Models # 303139 and 303140 - Molded Surface Mount Space and Military Grade Resistors SMRxDZ with Screen/Test Flow in Compliance with EEE-INST-002, (Tables 2A and 3A, Film/Foil, Level 1) and MIL-PRF-55182

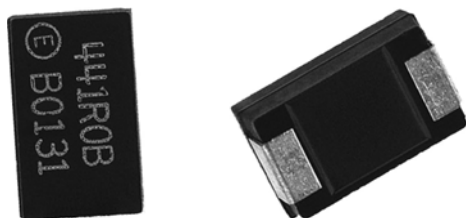

INTRODUCTION

The 303139, 303140 are ultra high precision molded surface mountable resistors offering all the elements of precision; including low TCR, tight tolerance, long term stability, low noise, low thermal EMF, and non-measurable voltage coefficient. One of the important parameters influencing stability is the temperature coefficient of resistance (TCR). Although the TCR of foil resistors is considered extremely low, this characteristic has been further refined over the years. These resistors utilize ultra high precision Bulk Metal® Z-Foil.

The Z-Foil technology provides a significant reduction of the resistive element's sensitivity to ambient temperature variations (TCR) and to self heating when power is applied (power coefficient).

Voltage division with tight tracking < 2 ppm/°C can be achieved with 2 **randomly** selected units even with a large ratio between the two values.

Our application engineering department is available to advise and make recommendations.

FEATURES

- Temperature coefficient of resistance (TCR):
± 0.2 ppm/°C typical (- 55 °C to + 125 °C, + 25 °C ref.)
- Tolerance: to ± 0.02 %
- Power coefficient of resistance (PCR)
“ΔR due to self heating”: 5 ppm at rated power
- Flexible terminations ensure minimal stress transference from the PCB due to a difference in thermal coefficient of expansions (TCE)
- Electrostatic discharge (ESD) up to 25 000 V
- Load life stability: ± 0.005 % (70 °C, 2000 h at rated power)
- Resistance range: 5 Ω to 40 kΩ
- Vishay Foil resistors are not restricted to standard values; specific “as requested” values can be supplied at no extra cost or delivery (e.g. 1K2345 vs. 1K)
- Maximum power: to 600 mW at 70 °C
- Non-inductive, non-capacitive design
- Current noise: - 40 dB
- Voltage coefficient: < 0.1 ppm/V
- Non-inductive: < 0.08 μH typical
- Non hot spot design
- Terminal finish: tin/lead alloy
- Matched sets with TCR tracking are available upon request
- For oriented performances please contact us
- For prototype units, append a “U” to the model number (example: 303139U). These units pass all tests per table 3 (page 4) with no destructive qualification testing required (table 4, page 4). For more information, please contact foil@vishaypg.com

TABLE 1 - TOLERANCE AND TCR VS. RESISTANCE VALUE
(- 55 °C to + 125 °C, + 25 °C ref.)

VALUE	ABSOLUTE TOLERANCE	TYPICAL TCR AND MAX. SPREAD (ppm/°C)
250 Ω to 40 kΩ	± 0.02 %	± 0.2 ± 1.8
50 Ω to < 250 Ω	± 0.05 %	± 0.2 ± 1.8
20 Ω to < 50 Ω	± 0.1 %	± 0.2 ± 2.8
10 Ω to < 20 Ω	± 0.2 %	± 0.2 ± 4.8
5 Ω to < 10 Ω	± 0.5 %	± 0.2 ± 6.8

FIGURE 1 - POWER DERATING CURVE

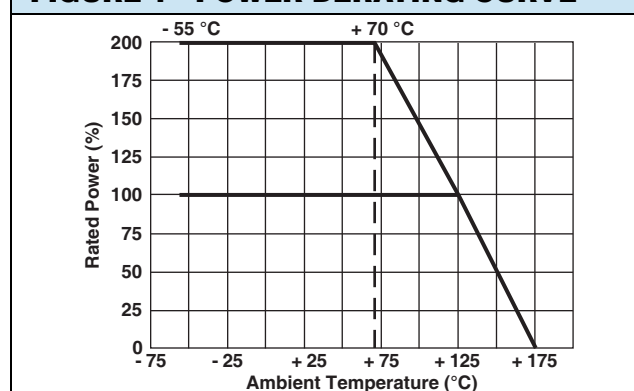


TABLE 2 - PERFORMANCE SPECIFICATIONS

TEST	CONDITIONS				MAXIMUM LIMIT ⁽¹⁾	
	303139		303140		303139	303140
Resistance Range	5 Ω to 14 k Ω		5 Ω to 40 k Ω			
Power Rating	5 Ω to 10 k Ω 0.250 W at 70 °C 0.125 W at 125 °C	10 k Ω to 14 k Ω 0.160 W at 70 °C 0.08 W at 125 °C	5 Ω to 30 k Ω 0.6 W at 70 °C 0.3 W at 125 °C	30 k Ω to 40 k Ω 0.4 W at 70 °C 0.2 W at 125 °C	See figure 1	
Maximum Working Voltage					47 V	127 V
Maximum Operating Temperature	+ 175 °C (see figure 1)					
Working Temperature Range	- 55 °C to + 125 °C (MIL range)					
Thermal Shock	- 65 °C to + 150 °C; 25 cycles				0.02 % for values higher than 100 Ω 0.03 % for values between 5 Ω to 100 Ω	
Short Time Overload	6.25 x rated power (at + 125 °C); 5 s, not to exceed 70.5 V for 303139, 190 V for 303140				\pm 0.01 % (100 ppm)	
Low Temperature Operation	- 65 °C, 24 h (no load): 45 min at rated power				\pm 0.01 % (100 ppm)	
Dielectric Withstanding Voltage	Atmospheric pressure; AC 200 V; 1 min				\pm 0.01 % (100 ppm)	
Insulation Resistance (M Ω)	DC 100 V; 1 min				over 10 000 M Ω	
Resistance to Soldering Heat (%)	260 °C; 10 s				\pm 0.03 %	
Moisture Resistance	+ 65 °C to - 10 °C; 90 % to 98 % RH; rated power; 240 h				\pm 0.02 % (200 ppm)	
Shock	100 G; sawtooth; axes Y, Z; 10 shocks per each axis				\pm 0.01 % (100 ppm)	
Vibration, High Frequency	10 Hz ~ 2000 Hz ~ 10 Hz; 20 G; axes Y, Z; 4 h in each axis				\pm 0.01 % (100 ppm)	
Load Life Stability (2000 h)	125 °C, rated power				\pm 0.05 % (500 ppm)	
High Temperature Exposure	175 °C; no load 2000 h				\pm 0.1 % (1000 ppm)	
Weight					0.1143 g	0.244 g
Packaging	Bulk (loose) or tape and reel, per EIA-481-1					

Note(1) As shown + 0.01 Ω to allow for measurement error at low values

FIGURE 2 - DIMENSIONS in inches (millimeters)

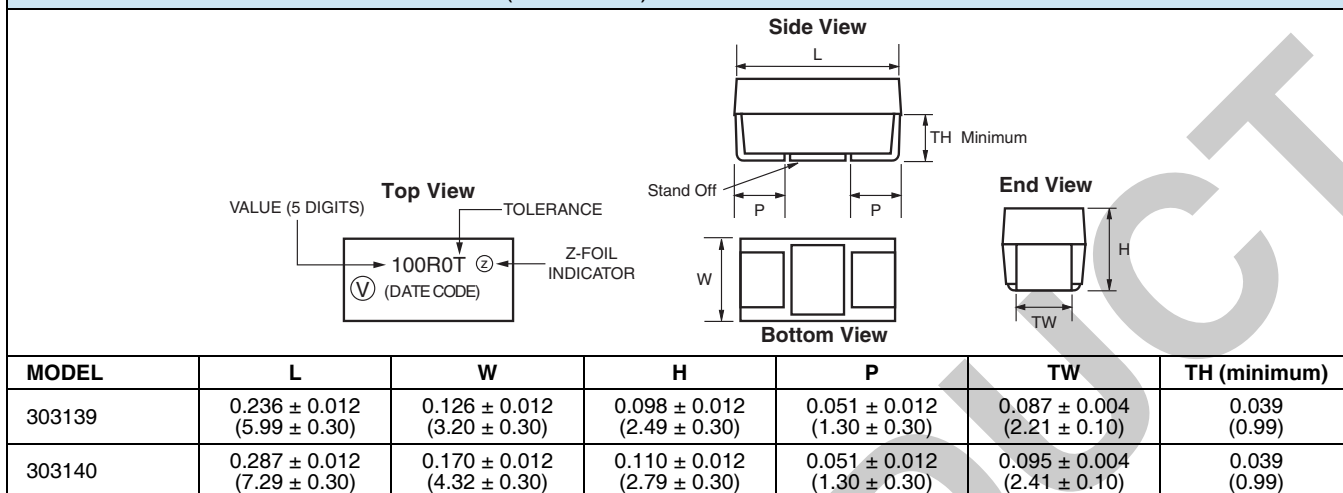


FIGURE 3 - RECOMMENDED MOUNTING PAD GEOMETRIES in inches (millimeters)

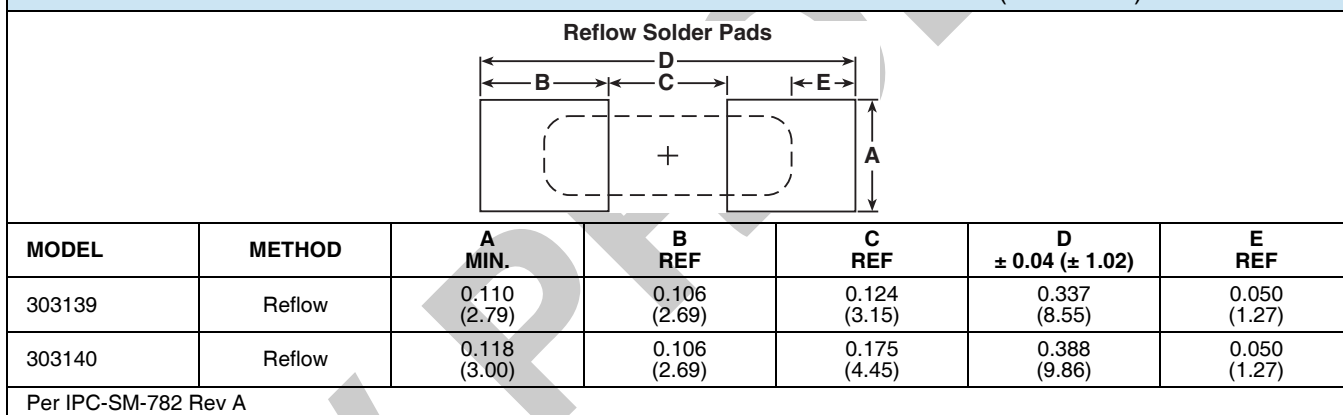


FIGURE 4 - TRIMMING TO VALUES
(Conceptual Illustration)


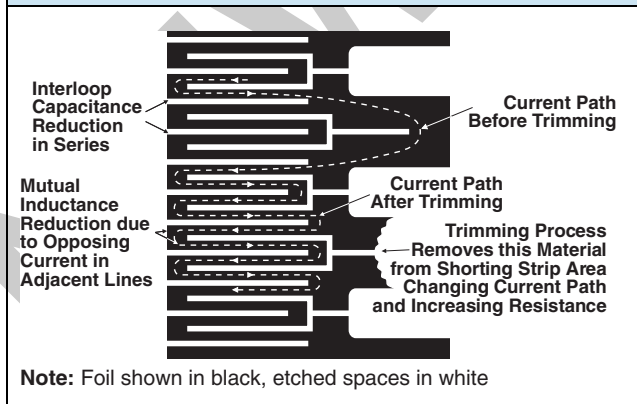


FIGURE 5 - TYPICAL RESISTANCE/TEMPERATURE CURVE (Z-FOIL)

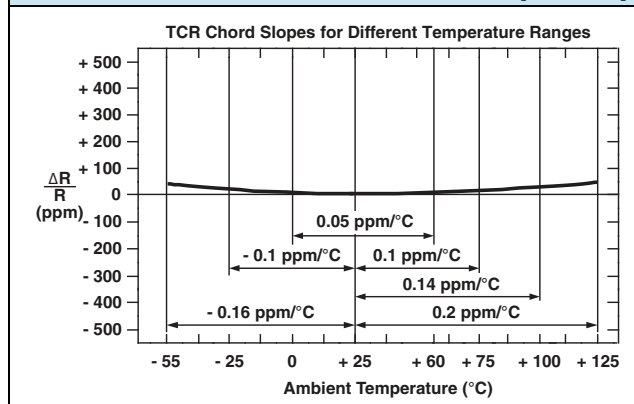

NOTES

- For prototype units, append a "U" to the model number (example: 303139U). These units have all of the table 2A 100 % tests performed, with no destructive qualification testing required.
- Measurement error allowed for ΔR limits: 0.01 Ω .

TABLE 3 - EEE-INST-002 (TABLE 2A FILM/FOIL, LEVEL 1) 100 % TESTS/INSPECTIONS

Pre-cap Visual Inspection	Performed in production flow on welded chip on strip
RC Record	In tolerance
Thermal Shock	25 x (- 65 °C to + 150 °C)
Short Time Overload	6.25 x rated power (at + 125 °C), 5 s, not to exceed 70.5 V for 303139, 190 V for 303140
RC Record	In tolerance, $\Delta R = 0.02$ % for values higher than 100 Ω , $\Delta R = 0.03$ % for values between 5 Ω to 100 Ω
Power Conditioning	Rated power, 100 h, + 125 °C
Component Linearity Test	
RC Record	In tolerance $\Delta R \leq 200$ ppm for $R > 100 \Omega$, $\Delta R \leq 500$ ppm for $R \leq 100 \Omega$
Final Inspection	PDA 3 % on $\Delta R > 0.05$ % only
Visual Inspection	Materials, design, marking, etc.
Mechanical Inspection	Physical dimensions sample size: 3 units. For a min. of one failure - 100 % inspection

TABLE 4 - EEE-INST-002 (TABLE 3A FILM/FOIL, LEVEL 1) DESTRUCTIVE TESTS

Group 2	Sample size: 3(0)													
	Solderability	MIL-STD-202, method 208												
	Resistance to solvents	MIL-STD-202, method 215												
Group 3	Sample size: 10(0)													
	Thermal shock	25 x (- 65 °C to + 150 °C)												
	MIL-STD-202, method 107	$\Delta R = 0.02 \%$ for values higher than 100 Ω $\Delta R = 0.03 \%$ for values between 5 Ω to 100 Ω												
	<table><tr><th colspan="2">303139, 303140</th></tr><tr><th>Values</th><th>TCR limits</th></tr><tr><td>100 Ω to 40 kΩ</td><td>± 2 ppm/°C</td></tr><tr><td>20 Ω to < 100 Ω</td><td>± 3 ppm/°C</td></tr><tr><td>10 Ω to < 20 Ω</td><td>± 5 ppm/°C</td></tr><tr><td>5 Ω to < 10 Ω</td><td>± 7 ppm/°C</td></tr></table>		303139, 303140		Values	TCR limits	100 Ω to 40 k Ω	± 2 ppm/°C	20 Ω to < 100 Ω	± 3 ppm/°C	10 Ω to < 20 Ω	± 5 ppm/°C	5 Ω to < 10 Ω	± 7 ppm/°C
	303139, 303140													
	Values	TCR limits												
	100 Ω to 40 k Ω	± 2 ppm/°C												
	20 Ω to < 100 Ω	± 3 ppm/°C												
	10 Ω to < 20 Ω	± 5 ppm/°C												
	5 Ω to < 10 Ω	± 7 ppm/°C												
TCR - mounted on FR4	Temperature range: - 55 °C/+ 25 °C/+ 125 °C													
Low temperature storage	- 65 °C no load dwell for 24 h \pm 4 h + 25 °C ambient no load dwell for 2 h to 8 h													
Low temperature operation	$\Delta R = 0.01 \%$ - 65 °C no load dwell for 1 h rated power (at + 125 °C) for 45 min + 25 °C ambient no load dwell for 24 h \pm 4 h													
Short time overload	$\Delta R = 0.01 \%$ 6.25 x rated power (at + 125 °C), not to exceed 70.5 V for 303139, 190 V for 303140													

TABLE 4 - EEE-INST-002 (TABLE 3A FILM/FOIL, LEVEL 1) DESTRUCTIVE TESTS

Group 4	Sample size: 9(0)	
	DWV	$\Delta R = 0.01 \%$
	MIL-STD-202, method 301	Atmospheric pressure, 200 V _{AC} , 1 min
	Insulation resistance	100 V _{DC}
	MIL-STD-202, method 302	IR $\geq 10^4$ M Ω
	Resistance to soldering heat - mounted on FR4	$\Delta R = 0.03 \%$
	MIL-STD-202, method 210 condition B	260 °C, 10 s
	Moisture resistance	$\Delta R = 0.02 \%$
	MIL-STD-202, method 106	
	DWV, at 200 V _{AC} , 1 min atmospheric pressure	$\Delta R = 0.01 \%$
	Insulation resistance, at 100 V _{DC}	IR ≥ 100 M Ω
Group 5	Sample size: 9(0) - mounted on FR4	
	Shock	$\Delta R = 0.01 \%$
	MIL-PRF-55182 and MIL-STD-202, method 213, condition I	
	10 shocks in each of two mutually perpendicular planes (Y, Z) 100 G, 6 ms, sawtooth	
	Vibration	$\Delta R = 0.01 \%$
Group 6	MIL-PRF-55182 and MIL-STD-202, method 204, condition D	
	10 Hz - 2000 Hz - 10 Hz, 20 G, planes Y, Z	
	In each of two mutually perpendicular planes (Y, Z), 20 G, 4 h in each plane	
	Sample size: 12(0) - mounted on FR4	
Group 8	Life	$\Delta R = 0.05 \%$
	MIL-STD-202, method 108	
	1.5 h on, 0.5 h off, 125 °C, rated power (at + 125 °C), 2000 h	
Group 9	Sample Size: 5(0) - not mounted	
	Voltage coefficient	5 ppm/V
	MIL-PRF-55182 and MIL-STD-202, method 309	Working voltage Resistance range > 1 K
Group 10	Sample size: 5(0)	
	High temperature exposure	$\Delta R = 0.1 \%$ + 175 °C, 2000 h, no load
Group 10	Thermal outgassing	Contact Vishay application engineering for review

Note

- The sample units of table 4 should be randomly selected from lots which successfully passed the table 3 tests

PART NUMBER IDENTIFICATION

Model #	303139	303140
Base Model	SMR1DZ	SMR3DZ
Value Range (Space Applications)	5 Ω to 14 k Ω	5 Ω to 40 k Ω

Part Number:

{Model} - {Value} - {Tolerance} - {Termination} - {Packaging}

Absolute Tolerance	Code
0.02 %	Q
0.05 %	A
0.1 %	B
0.2 %	E
0.5 %	D

Termination	Code
Tin/lead	B

Packaging	Code
Bulk	L
Tape and reel	T

Example: 303139 - 8K0225 - QBT303139, 8.0225 k Ω , 0.02 %, tin/lead termination, tape and reel packaging

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay Precision Group disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.