MICRO SWITCH
a Honeywell Division
FED.MFG.CODE 91929

SWITCH–BASIC

CATALOG LISTING
4HS155–320

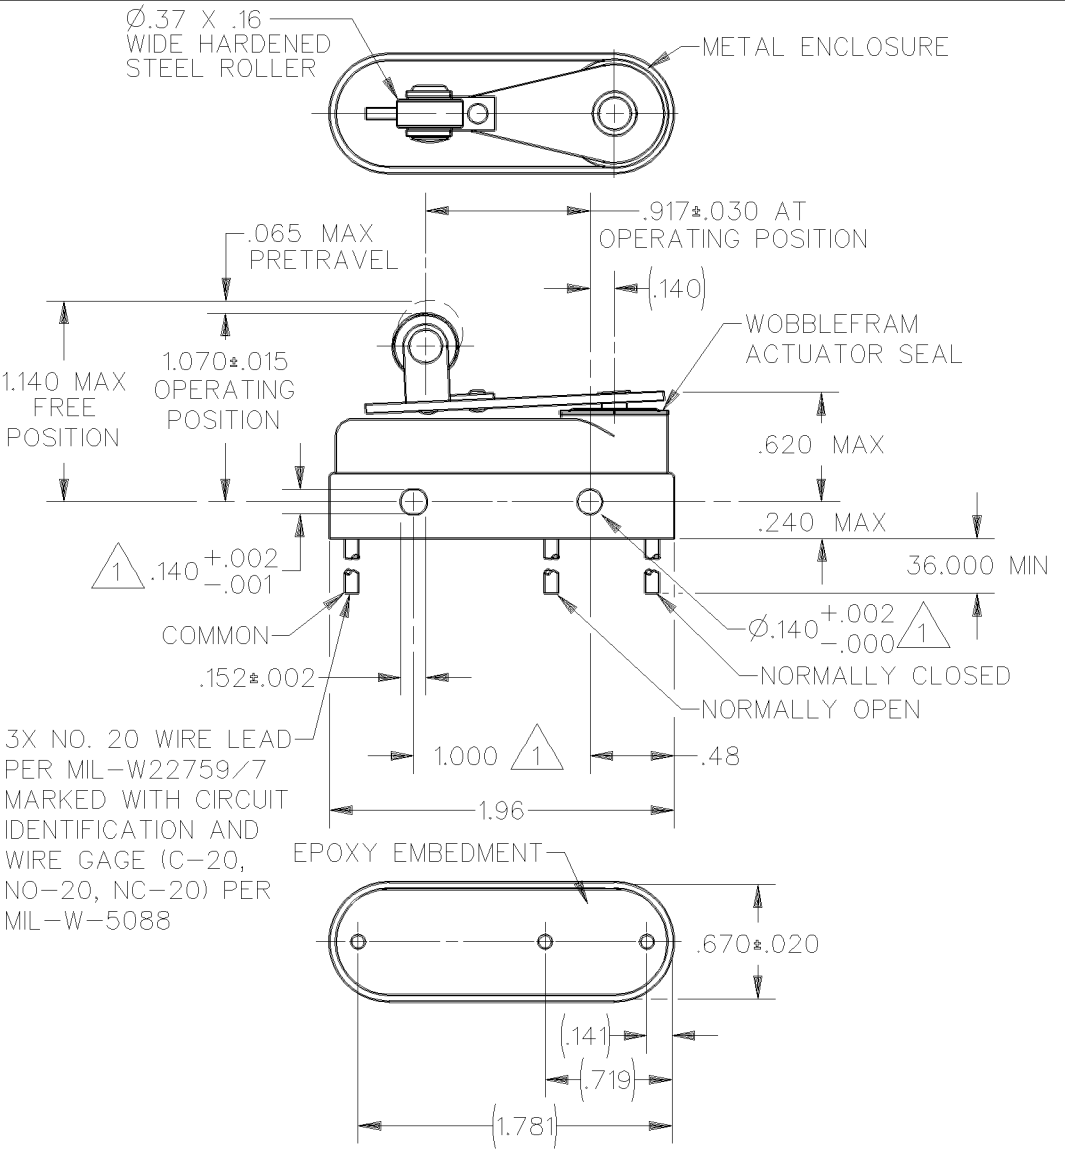

NOTES

1. MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF Ø.139 MAX ON 1.000±.002 CENTERS
2. – FOR USE IN AMBIENT TEMPERATURE RANGE FROM –65°F TO +250°F
3. WEIGHT OF SWITCH ONLY IS 1.7 OZ MAX WEIGHT OF CONDUCTOR GROUP ONLY IS 0.5 MAX PER FOOT

ANSI Y14.5M–1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS	
OPERATING FORCE	10–22 OZ
DIFFERENTIAL TRAVEL	.020 MAX
RELEASE FORCE	4 OZ MIN
OVERTRAVEL	.032 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

LINE VOLTAGE	INDUCTIVE LOAD	RESISTIVE LOAD
28 VDC	8 AMP	10 AMP
125 VAC	1 AMP	.5 AMP

SCALE FULL — DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT 3

CATALOG LISTING 4HS155–320 PAGE 1 OF 1
ISSUE 4
RELEASE NO. PR–21159
REPLACES

REVISIONS

A	CO–77846	D L T 8 SEP 94
B	CO–94122	TSM 17 MAR 99

DRAWN	TSM	3 JUN 94
CHECK	DAW	6 JUN 94
CHECK		
CHECK		

FORMTEK

Downloaded from Arrow.com.