
POWER PCB RELAY RT1 INRUSH

GENERAL PURPOSE
PCB RELAYS

FEATURES

- 1 pole 16A, 1 form C (CO) or 1 form A (NO) contact
- For inrush peak currents up to 80A
- Mono- or bistable coil
- 5kV/10mm coil-contact
- Reinforced insulation
- Ambient temperature 85°C
- Product in accordance to IEC 60335-1

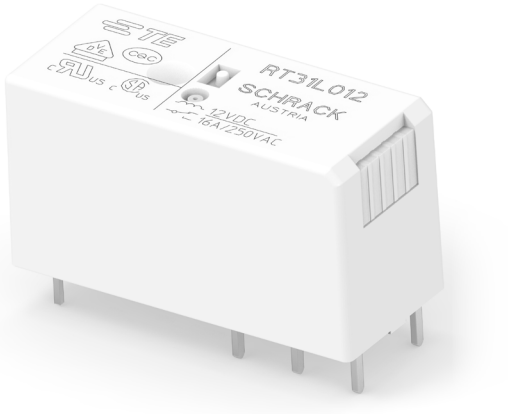

APPLICATIONS

- Domestic appliances
- Heating control
- Lighting control

APPROVALS

- VDE Cert. No. 40007571
- UL E214025
- cCSAus 1142018
- CQC - 18002197247 (monostable)
  18002197364 (bistable)

Technical data of approved types on request

Downloaded from Arrow.com.

CONTACT DATA


Contact arrangement	1 form C (CO) or 1 form A (NO)
Rated voltage	250VAC
Max. switching voltage	400VAC
Rated current	16A
Limiting continuous current	16A, UL: 20A (K-version)
Limiting making current	
max 4s, df 10%	30A
max. 20ms (incandescent lamps), RT33L version	80A
Breaking capacity max.	4000VA
Contact material	AgNi90/10, AgSnO
Frequency of operation, with/without load	360/72000h^{-1}
Operate/release time max., DC Coil	9/6ms
Operate/Reset time max., bistable version	10/10ms
Bounce time max., form A/form B	3/6ms

CONTACT RATINGS


Type	Contact	Load	Cycles
IEC 61810			
RT33L	A (NO)	16A, 250VAC resistive, 85°C	50x10^3
RT33L	A (NO)	10A, 400VAC resistive, 85°C	10x10^3
RT31	C (CO)	16A, 250VAC resistive, 85°C	5x10^3
RT33K	A (NO)	16A, 250VAC resistive, 85°C	30x10^3
UL 61810-1 (former UL 508)			
RT33K	A (NO)	20A, 277VAC general purpose, 40°C	10x10^3
RT33L	A (NO)	16A, 250VAC resistive, 85°C	50x10^3
RT31	C (CO)	16A, 250VAC resistive, 85°C	6x10^3
RT33L	A (NO)	1000W Tungsten, 120VAC, 60 Hz, 40°C	6x10^3
RT33L	A (NO)	1000W standard ballast, 120VAC, 60 Hz, 40°C	6x10^3
UL 61810-1 (former UL 508)			
RT31L/RT33L	A (NO)	250V/6A, AC-3	6.050

Mechanical endurance	
monostable version	>30x10^6 operations
bistable version	>5x10^6 operations

MAX. DC LOAD BREAKING CAPACITY

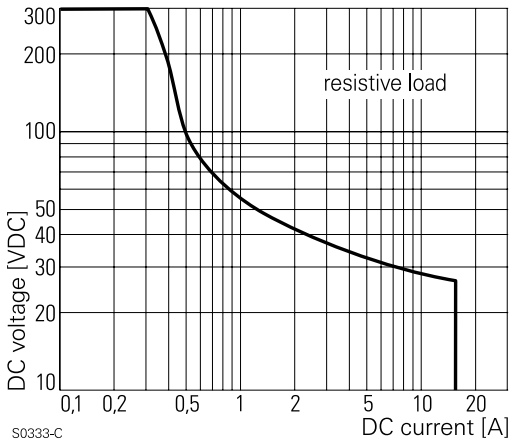

ELECTRICAL ENDURANCE

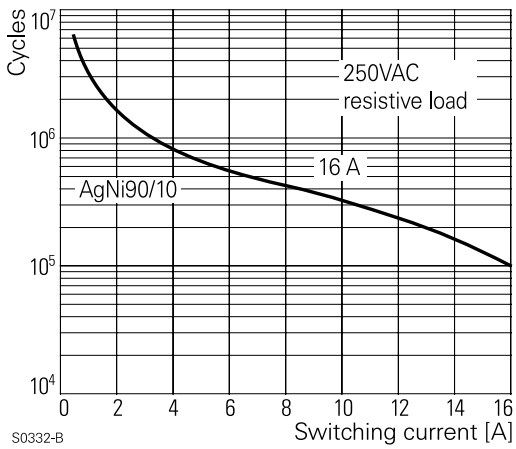

Downloaded from Arrow.com.

COIL DATA


Coil voltage range	3 to 110VDC
Operative range, IEC 61810	2
Coil insulation system according UL	class F

COIL VERSIONS, DC COIL

Coil code	Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance Ω±10% 1)	Rated coil power mW
003	3	2.1	0.3	21.4	421
005	5	3.45	0.5	62	403
006	6	4.2	0.9	90	400
012	12	8.2	1.2	360	400
024	24	16.8	2.4	1440	400
048	48	33.6	4.8	5520	417
060	60	42.0	6.0	8570[1)]	420

1) Coil resistance ±12%.
All figures are given for coil without pre-energization, at ambient temperature +23°C
Other coil voltages on request.

COIL OPERATING RANGE DC

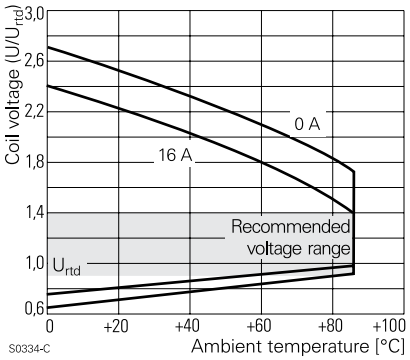

BISTABLE COIL DATA

	1 coil	2 coil
Magnetic system	polarized, bistable	
Coil voltage range	5 to 24VDC	
Operative range, IEC 61810	2	
Limiting voltage, % of rated coil voltage	120%	150%
Min./Max. energization duration	30ms/1min at <10% duty factor	
Coil insulation system according UL	class F	

COIL VERSIONS, BISTABLE COIL


Coil code	Rated voltage VDC	Set voltage VDC	Reset voltage VDC	Coil resistance Ω±10%	Rated coil power mW
bistable 1 coil					
A03	3	2.1	1.7	21.4	429
A05	5	3.5	2.8	62	403
A06	6	4.2	3.3	90	400
A12	12	8.4	6.6	360	400
A24	24	16.8	13.2	1440	400
bistable 2 coils					
F03	3	2.1	1.7	15	600
F05	5	3.5	2.8	42	595
F06	6	4.2	3.3	55	655
F12	12	8.4	6.6	240	600
F24	24	16.8	13.2	886	650

All figures are given for coil without pre-energization, at ambient temperature +23°C.
Other coil voltages on request.


Bistable coils - operation					
Version	**1 coil**		**2 coils**		
Coil terminals	A1	A2	A1	A3	A2
Operate	+	-		+	-
Rest	-	+	-	+	

Contact position not defined at delivery

COIL OPERATING RANGE, 1 COIL

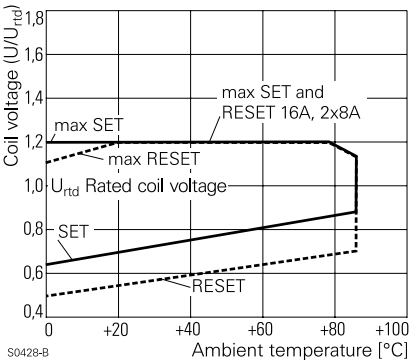

COIL OPERATING RANGE, 2 COILS

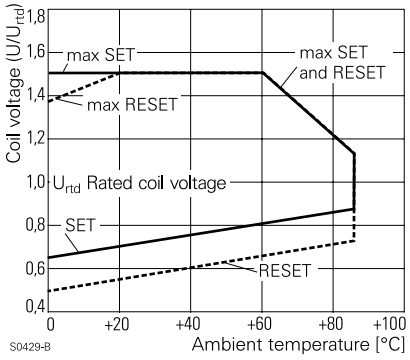

Downloaded from Arrow.com.

INSULATION DATA

Initial dielectric strength	
between open contacts	$1000V_{rms}$
between contact and coil	$5000V_{rms}$
Clearance/creepage	
between contact and coil	≥10/10mm
Material group of insulation parts	IIIa
Tracking index of relay base	PTI 250V

ACCESSORIES

For details see datasheet	Accessories Industrial Power Relay RT [2)]
Socket available for 1 coil version only.	

NOTE: indicated contact ratings and electrical endurance data for direct wiring of relays (according IEC 61810-1); for relays mounted on sockets deratings may apply.

OTHER DATA


Material compliance	EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at www.te.com/customersupport/rohssupportcenter
Resistance to heat and fire	according EN60335-1
Ambient temperature range	-40 to 85°C
Category of environmental protection, IEC 61810	RTII - flux proof RTIII - sealed
Vibration resistance (functional)	
form A/form B contact, 30 to 500Hz	20/5g
Shock resistance (destructive)	100g
Terminal type	PCB-THT, plug-in[2)]
Weight	14g
Resistance to soldering heat THT, IEC 60068-2-20	
RTII	270°C/10s
RTIII	260°C/5s
Packaging/unit	tube/20 pcs., box/500pcs.

2) Socket available for 1 coil version only, see Accessories


PCB LAYOUT / TERMINAL ASSIGNMENT

Bottom view on solder pins


16A, 1 form C (CO) contact, pinning 5mm



Monostable version




Bistable version [a)]




a) Indicated contact position during or after coil energization with reset voltage.
b) for 2 coil version only


16A, 1 form A (NO) contact, pinning 5mm



Monostable version




Bistable version [a)]




a) Indicated contact position during or after coil energization with reset voltage.
b) for 2 coil version only


12A, 1 form C (CO) contact, pinning 5mm



Monostable version, 1 form C (CO)




Monostable version, 1 form A (NO)



*) With the recommended PCB hole sizes a grid pattern from 2.5mm to 2.54mm can be used.

Downloaded from Arrow.com.

DIMENSIONS (Unit: mm)

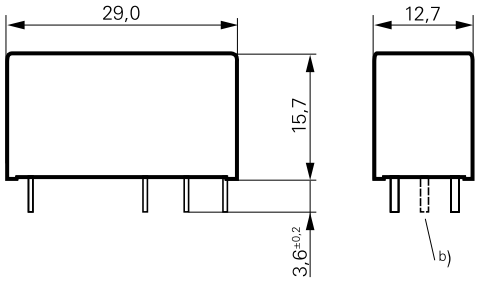

PRODUCT CODE STRUCTURE

Typical product code
RT 3 3 L 012

Type

RT	Power PCB Relay RT1 Inrush

Version

3	16A, pinning 5mm, flux proof
D	16A, pinning 5mm, sealed

Contact configuration

1	1 form C (CO) contact
3	1 form A (NO) contact

Version

Blank	Standard version

Coil

Coil code	please refer to coil versions table

Contact material

K	AgNi 90/10
L	$AgSnO_2$

PRODUCT INFORMATION

Product code	Version	Contacts	Contact material	Coil Version	Coil	Version	Part Number
RT31L003	16A, pinning 5mm flux proof	1 form C (CO) contact	$AgSnO_2$	Monostable	3VDC	Standard	7-1415547-5
RT31L006					6VDC		7-1393239-2
RT31L012					12VDC		7-1393239-3
RT31L024					24VDC		7-1393239-5
RT31L048					48VDC		7-1393239-6
RT31LA05				Bistable 1 coil	5VDC		6-1415544-3
RT31LA06					6VDC		3-1419136-9
RT31LA12					12VDC		3-1415517-1
RT31LA24					24VDC		7-1415014-1
RT31LF03				Bistable 2 coils	3VDC		8-1415389-1
RT31LF05					5VDC		6-1415544-6
RT31LF12					12VDC		3-1415402-1
RT31LF24					24VDC		8-1415014-1

Downloaded from Arrow.com.

Product code	Version	Contacts	Contact material	Coil Version	Coil	Version	Part Number
RT33K012	16A, pinning 5mm flux proof	1 form A (NO) contact	AgNi 90/10	Monostable	12VDC	Standard	2-1393240-3
RT33K024					24VDC		2-1393240-4
RT33KF12				Bistable 2 coils	12VDC		1-1415540-1
RT33L005			$AgSnO_2$	Monostable	5VDC		3-1393240-0
RT33L006					6VDC		3-1393240-1
RT33L012					12VDC		3-1393240-3
RT33L024					24VDC		3-1393240-5
RT33L048					48VDC		3-1393240-6
RT33LA03				Bistable 1 coil	3VDC		5-1415534-7
RT33LA05					5VDC		8-1415528-1
RT33LA06					6VDC		2-1393240-6
RT33LA12					12VDC		2-1393240-7
RT33LA24					24VDC		3-1415379-1
RT33LF05				Bistable 2 coils	5VDC		4-1419136-1
RT33LF12					12VDC		2-1393240-8
RT33LF24					24VDC		2-1393240-9
RTD1L005	16A, pinning 5mm wash tight	1 form C (CO) contact		Monostable	5VDC		1-1415537-7
RTD1L012					12VDC		5-1393238-6
RTD1L024					24VDC		8-1415398-1
RTD1LA05				Bistable 1 coil	5VDC		6-1415544-4
RTD1LA24					24VDC		4-1415541-5
RTD3L012		1 form A (NO) contact		Monostable	12VDC		5-1415393-1
RTD3L024					24VDC		4-1415538-9

This list represents the most common types and does not show all variants covered by this datasheet.
Other types on request.

Notes:

1. Datasheets and product specification according to IEC 61810-1 and to be used only together with the 'Definitions' section.
2. Datasheets and product data is subject to the terms of the disclaimer and all chapters of the 'Definitions' section, available at http://relays.te.com/definitions.
3. Datasheets, product data, 'Definitions' section, application notes and all specifications are subject to change.

te.com

©2026 TE Connectivity plc. All Rights Reserved.

TE Connectivity, TE connectivity (logo) and Every Connection Counts are trademarks owned or licensed by the TE Connectivity plc. family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, owned or licensed by the TE Connectivity family of companies. TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any changes to the information contained herein without prior notice. TE Connectivity assumes only those obligations set forth in the terms and conditions for this product and shall in no event be liable for any incidental, indirect, or consequential damages arising out of the sale, resale, use, or misapplication of the product. TE expressly disclaims any implied warranties with respect to the information contained herein, including, but not limited to, implied warranties of merchantability or fitness for a particular purpose. Dimensions, specifications and/or information contained herein are for reference purposes only and are subject to change without notice. Consult TE for the latest dimensions, specifications and/or information. Users of TE Connectivity products must make their own assessment as to whether the respective product is suitable for the respective desired application.

10/26 ED

Downloaded from Arrow.com.