
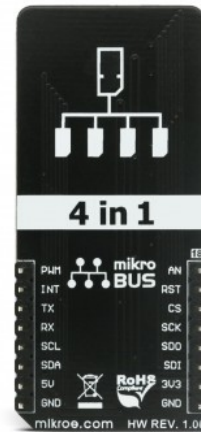


Shuttle Click

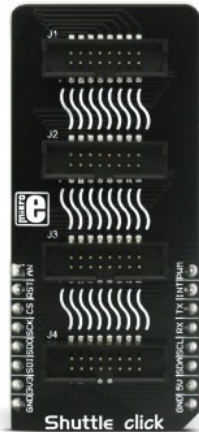

PID: MIKROE-2880

One click board™, numerous possibilities

Shuttle click is a mikroBUS™ socket expansion board, which provides an easy and elegant solution for stacking up to four click boards™ on a single mikroBUS™. It is a perfect solution for expanding the capacity of the development system with additional mikroBUS™ sockets when there is a demand for using more click boards™ than the used development system is able to support.

Shuttle click can be especially interesting for the development systems that are equipped with a very small number of mikroBUS™ slots, such as the [Clicker family](#) of development systems. Using Shuttle click on such system will greatly improve its usability by adding more mikroBUS™ sockets, yet it will remain small, compact and manageable.

Shuttle click is a mikroBUS™ socket expansion board, which provides an easy and elegant solution for stacking up to four click boards™ on a single mikroBUS™. It is a perfect solution for expanding the capacity of the development system with additional mikroBUS™ sockets when there is a demand for using more click boards™ than the used development system is able to support.

Shuttle click can be especially interesting for the development systems that are equipped with a very small number of mikroBUS™ slots, such as the [Clicker family](#) of development systems. Using Shuttle click on such a system will greatly improve its usability by adding more mikroBUS™ sockets, yet it will remain small, compact and manageable.

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.




ISO 9001: 2015 certification of quality management system (QMS).

How does it work?

Shuttle click consists of a high-quality PCB that can be connected to the mikroBUS™ as any other click board. The central part of the Shuttle click is populated with the four ICD BOX headers. Each of these four headers is used to connect to the same type of header on the add-on board, also known as [mikroBUS Shuttle](#), by a [flat ribbon cable](#). Thanks to the ICD BOX headers, the connection remains firm and stable. Besides the ICD BOX headers, these mikroBUS Shuttle add-on boards also have one mikroBUS™ equipped, so that the click board can be securely fitted to it. Having this kind of stacking topology, allows for easy manipulation and reconfiguration of the stacked click boards™, retaining a perfect connection quality at all times.

When there's a need to expand the development system with even more mikroBUS™ slots, one of the free mikroBUS shuttles can be populated with yet another Shuttle click, allowing even more connections. This makes the stacking capacity almost unlimited. However, attention should be paid not to make mikroBUS™ lines too long. In situations like this, the frequency of the communication might need to be stepped down a bit, in order to compensate for the longer mikroBUS™ signal lines.

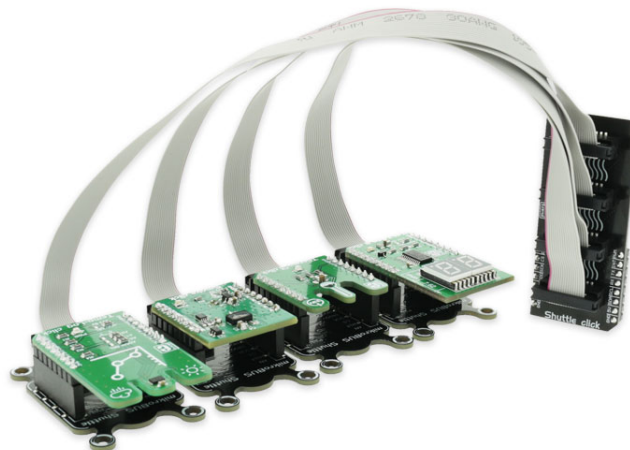

Lines of the mikroBUS™ to which Shuttle click is attached, are shared through all four ICD BOX headers - each of the four ICD BOX 2x8 pin headers mirrors pins of the connected mikroBUS™. Therefore, each mikroBUS Shuttle add-on board shares the same mikroBUS™ pins as the other mikroBUS Shuttles connected to the same Shuttle click. For this reason, an extra care should be taken when working with click boards™ that share the same pins on the mikroBUS™, either for the communication (SPI, UART, I2C) or for some other purpose (RST, INT, or other pins used as GPIO). For example, I2C and 1-Wire protocols are designed with stacking in mind, so the collision avoidance mechanisms are already in place for these protocols. It is enough to change the slave address of the click board™ and data collision won't be a problem anymore, even while sharing the same pins for the communication.

Also, since all the stacked click boards™ share the same power rails, a care should be taken when combining click boards™ with significant power consumption. The power consumption from all the click boards™ combined should not exceed the maximum power that a development system can deliver.

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

Click board™ product range

The union of Shuttle click, mikroBUS Shuttle and [click boards™](#) allows you to reach an unlimited number of possibilities when it comes to combining different functionalities. You just need to choose the ones you want from our ever-growing range: environmental sensors, LEDs, speech recognition, heart rate sensors, motor control, GSM, GPS, WiFi, analog to digital converters, movement sensors.

More than 400 click boards™ that can be stacked and integrated in a simple and convenient way are at your disposal.

Turn your development system into a mikroBUS shuttle station!

Specifications

Type	Adapter
Applications	Provides easy, secure and reliable stacking of up to four additional boards per mikroBUS™ socket.
On-board modules	Carries four ICD BOX 2x8 pin headers
Key Features	mikroBUS™ socket expansion board, which provides an easy and elegant solution for stacking up to four click boards™ on a single mikroBUS™
Interface	GPIO
Feature	No ClickID
Compatibility	mikroBUS™
Click board size	L (57.15 x 25.4 mm)
Input Voltage	3.3V,5V

Pinout diagram

This table shows the pinout on the mikroBUS™ socket.

Notes					Notes
Analog Input	1	AN	PWM	16	PWM Output
Reset	2	RST	INT	15	Hardware Interrupt
SPI Chip Select	3	CS	RX	14	UART Receive
SPI Clock	4	SCK	TX	13	UART Transmit
SPI Slave Data Out	5	MISO	SCL	12	I2C Clock
SPI Slave Data In	6	MOSI	SDA	11	I2C Data
Power Supply	7	3.3V	5V	10	Power Supply
Ground	8	GND	GND	9	Ground

Onboard settings and indicators

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

Label	Name	Default	Description
J1	HM2X8	-	J1 Connector (IDC BOX header) has 16 pins, one for every mikroBUS™ pin. Flat ribbon cable provides connection to mikroBUS™ Shuttle which has the same type of connector.
J2	HM2X8	-	J2 Connector (IDC BOX header) has 16 pins, one for every mikroBUS™ pin. Flat ribbon cable provides connection to mikroBUS™ Shuttle which has the same type of connector.
J3	HM2X8	-	J3 Connector (IDC BOX header) has 16 pins, one for every mikroBUS™ pin. Flat ribbon cable provides connection to mikroBUS™ Shuttle which has the same type of connector.
J4	HM2X8	-	J4 Connector (IDC BOX header) has 16 pins, one for every mikroBUS™ pin. Flat ribbon cable provides connection to mikroBUS™ Shuttle which has the same type of connector.

Resources

[mikroBUS™ standard specifications](#)

[Click board™ Catalog](#)

[Click Boards™](#)

Downloads

[Shuttle click schematic](#)

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
 ISO 14001: 2015 certification of environmental management system.
 OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).



Time-saving embedded tools

MIKROELEKTRONIKA D.O.O, Barajnički drum 23, 11000 Belgrade, Serbia
VAT: SR105917343 Registration No. 20490918
Phone: + 381 11 78 57 600 Fax: + 381 11 63 09 644 E-mail: office@mikroe.com
www.mikroe.com

[Shuttle click 2D and 3D click](#)

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).