


NR



Pitch 3.5mm
Right angle, W/O flange, THR
Poles 2*2p~2*12p
NRxx11x1xxxxG*
Number of poles

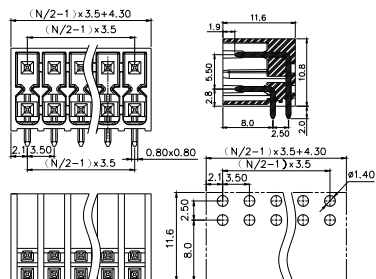


Electrical: cULus
Voltage rating: 150V
Current rating: 5.5A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Wire strip length:
Withstanding Voltage: 1.3KV
Safety Approval: **cULus**

NR



Pitch 3.5mm
Vertical, W/O flange, THR
Poles 2*2p~2*24p
NRxx11x0xxxxG*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 5.5A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

NR




Pitch 3.5mm
Vertical, With flange, THR
Poles 2*2p~2*24p
NRxx12x0xxxxG*
Number of poles

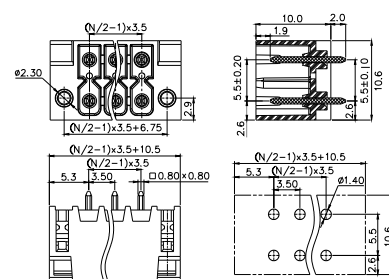


Electrical: cULus
Voltage rating: 300V
Current rating: 5.5A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

KE

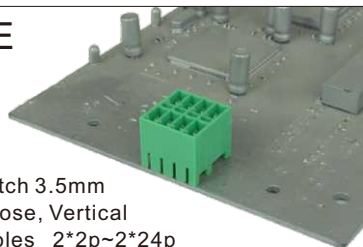


Pitch 3.5mm
Close, Vertical
Poles 2*2p~2*24p
KExx1150A000G*
Number of poles




Electrical: cULus
Voltage rating: 160V
Current rating: 5.5A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.32KV
Safety Approval: **cULus**

KE




Pitch 3.5mm
Close, Right angle
Poles 2*2p~2*24p
KExx1151A000G*
Number of poles




Electrical: cULus
Voltage rating: 160V
Current rating: 5.5A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.32KV
Safety Approval: **cULus**

KE

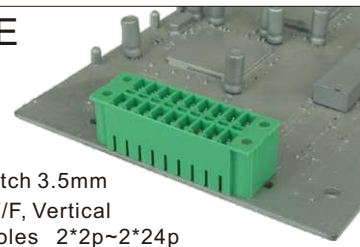

Pitch 3.5mm
W/F, Vertical
Poles 2*2p~2*24p
KExx1250A000G*
Number of poles



Electrical: cULus
Voltage rating: 160V
Current rating: 5.5A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.32KV
Safety Approval: **cULus**