

## SERIES: PSK-15D | DESCRIPTION: INTERNAL AC-DC POWER SUPPLY

### FEATURES


- wide input range (85 ~ 305 Vac)
- wide operating temperature range (-40 to +85 C)
- Class B emissions
- certified to 62368, 61558, and 60335 safety standards
- designed to meet 60601 medical safety standard (2xMOPP)
- over voltage, over current, short circuit protections
- input over voltage category III for fixed installations



| MODEL      | output voltage | output current max | output power max | ripple and noise max | efficiency |
|------------|----------------|--------------------|------------------|----------------------|------------|
|            | (Vdc)          | (A)                | (W)              | (mVp-p)              | typ (%)    |
| PSK-15D-3  | 3.3            | 4.0                | 13.2             | 120                  | 82         |
| PSK-15D-5  | 5              | 3.0                | 15.0             | 120                  | 85         |
| PSK-15D-9  | 9              | 1.67               | 15.0             | 120                  | 84         |
| PSK-15D-12 | 12             | 1.25               | 15.0             | 120                  | 85         |
| PSK-15D-15 | 15             | 1.0                | 15.0             | 120                  | 85         |
| PSK-15D-24 | 24             | 0.625              | 15.0             | 120                  | 86         |

Notes: 1. At full load, nominal input, 20 MHz bandwidth oscilloscope, with output capacitors outlined in Figure/Table 1 below.  
 2. At 230 Vac input.  
 3. All specifications are measured at Ta=25°C, humidity <75%, nominal input voltage, and rated output load unless otherwise specified.

### PART NUMBER KEY

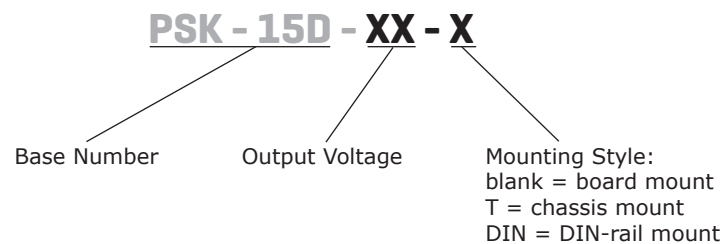

## INPUT

| parameter                 | conditions/description              | min | typ | max  | units |
|---------------------------|-------------------------------------|-----|-----|------|-------|
| voltage                   | ac input                            | 85  |     | 305  | Vac   |
|                           | dc input                            | 100 |     | 430  | Vdc   |
| frequency                 |                                     | 47  |     | 63   | Hz    |
| current                   | at 115 Vac                          |     |     | 0.45 | A     |
|                           | at 230 Vac                          |     |     | 0.30 | A     |
| inrush current            | at 230 Vac                          |     | 60  |      | A     |
| leakage current           | at 277 Vac/50 Hz                    |     |     | 0.1  | mA    |
| no load power consumption | 3.3, 5, 9, 12, 15 Vdc output models |     |     | 0.1  | W     |
|                           | 24 Vdc output model                 |     |     | 0.12 | W     |

## OUTPUT

| parameter               | conditions/description | min | typ  | max   | units |
|-------------------------|------------------------|-----|------|-------|-------|
| capacitive load         | 3.3 Vdc output model   |     |      | 6,600 | μF    |
|                         | 5 Vdc output model     |     |      | 5,000 | μF    |
|                         | 9 Vdc output model     |     |      | 3,000 | μF    |
|                         | 12 Vdc output model    |     |      | 2,000 | μF    |
|                         | 15 Vdc output model    |     |      | 1,500 | μF    |
|                         | 24 Vdc output model    |     |      | 680   | μF    |
| output voltage accuracy |                        |     | ±2   |       | %     |
| line regulation         | at full load           |     | ±0.5 |       | %     |
| load regulation         | 0~100% load            |     | ±1.0 |       | %     |
| hold-up time            | at 115 Vac             |     | 10   |       | ms    |
|                         | at 230 Vac             |     | 55   |       | ms    |
| switching frequency     |                        |     | 65   |       | kHz   |

## PROTECTIONS

| parameter                | conditions/description            | min | typ | max | units |
|--------------------------|-----------------------------------|-----|-----|-----|-------|
| over voltage protection  | clamp or hiccup                   |     |     |     |       |
|                          | 3.3 & 5 Vdc output models         |     |     | 7.5 | V     |
|                          | 9 Vdc output model                |     |     | 15  | V     |
|                          | 12 & 15 Vdc output models         |     |     | 20  | V     |
|                          | 24 Vdc output model               |     |     | 30  | V     |
| over current protection  | auto recovery                     | 110 |     |     | %     |
| short circuit protection | continuous, auto recovery, hiccup |     |     |     |       |

## SAFETY & COMPLIANCE

| parameter         | conditions/description                                                                                                                                  | min   | typ | max | units |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-----|-----|-------|
| isolation voltage | input to output, 1 min., <5mA                                                                                                                           | 4,200 |     |     | Vac   |
| safety approvals  | certified to 62368: IEC, EN, UL/cUL<br>certified to 60335: EN<br>certified to 61558: EN<br>designed to meet 60601: IEC, EN, UL/cUL                      |       |     |     |       |
| safety class      | Class II                                                                                                                                                |       |     |     |       |
| EMI/EMC           | CISPR32/EN 55032 CLASS B<br>CISPR11/EN 55011 CLASS B<br>EN 55014-1                                                                                      |       |     |     |       |
| ESD               | IEC/EN 61000-4-2 Contact ±8KV perf. Criteria B<br>IEC/EN 55014-2 perf. Criteria B                                                                       |       |     |     |       |
| radiated immunity | IEC/EN 61000-4-3 10V/m perf. Criteria A<br>IEC/EN 55014-2 perf. Criteria A                                                                              |       |     |     |       |
| EFT/burst         | IEC/EN 61000-4-4 ±2KV perf. Criteria B<br>IEC/EN 61000-4-4 ±4KV (See Fig.2 for recommended circuit) perf. Criteria B<br>IEC/EN 55014-2 perf. Criteria B |       |     |     |       |

SAFETY & COMPLIANCE

|                               |                                                                                                                                                                                   |           |  |  |       |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|--|--|-------|
| surge                         | IEC/EN 61000-4-5 line to line ±1KV perf. Criteria B<br>IEC/EN 61000-4-5 line to line ±2KV (See Fig.2 for recommended circuit) perf. Criteria B<br>IEC/EN 55014-2 perf. Criteria B |           |  |  |       |
| conducted immunity            | IEC/EN 61000-4-6 10Vr.m.s perf. Criteria A<br>IEC/EN 55014-2 perf. Criteria A                                                                                                     |           |  |  |       |
| voltage dips and interruption | IEC/EN 61000-4-11 0%, 70% perf. Criteria B<br>IEC/EN 55014-2 perf. Criteria B                                                                                                     |           |  |  |       |
| MTBF                          | MIL-HDBK-217F at 25°C                                                                                                                                                             | 3,200,000 |  |  | hours |
| RoHS                          | yes                                                                                                                                                                               |           |  |  |       |

ENVIRONMENTAL

| parameter             | conditions/description | min | typ | max | units |
|-----------------------|------------------------|-----|-----|-----|-------|
| operating temperature |                        | -40 |     | 85  | °C    |
| storage temperature   |                        | -40 |     | 85  | °C    |
| storage humidity      |                        | 0   |     | 95  | %     |

SOLDERABILITY

| parameter      | conditions/description | min | typ | max | units |
|----------------|------------------------|-----|-----|-----|-------|
| wave soldering | 5~10 seconds max       | 255 | 260 | 265 | °C    |
| hand soldering | 3~5 seconds max        | 350 | 360 | 370 | °C    |


MECHANICAL

| parameter     | conditions/description                                     | min | typ | max | units |
|---------------|------------------------------------------------------------|-----|-----|-----|-------|
| dimensions    | DIP: 47.60 x 26.80 x 23.50                                 |     |     |     | mm    |
|               | chassis mount: 76.00 x 31.50 x 32.30                       |     |     |     | mm    |
|               | DIN-rail: 76.00 x 31.50 x 36.90                            |     |     |     | mm    |
| weight        | DIP                                                        |     | 48  |     | g     |
|               | chassis mount                                              |     | 68  |     | g     |
|               | DIN-rail                                                   |     | 88  |     | g     |
| case material | lack plastic, flame-retardant and heat-resistant (UL94V-0) |     |     |     |       |

MECHANICAL DRAWING

units: mm [inch]  
pin diameter tolerance: ±0.10 [±0.004]  
tolerance: ±0.50 [±0.020]


| PIN CONNECTIONS |          |
|-----------------|----------|
| PIN             | Function |
| 1               | AC(L)    |
| 2               | AC(N)    |
| 3               | -Vo      |
| 4               | +Vo      |
| 5               | no pin   |

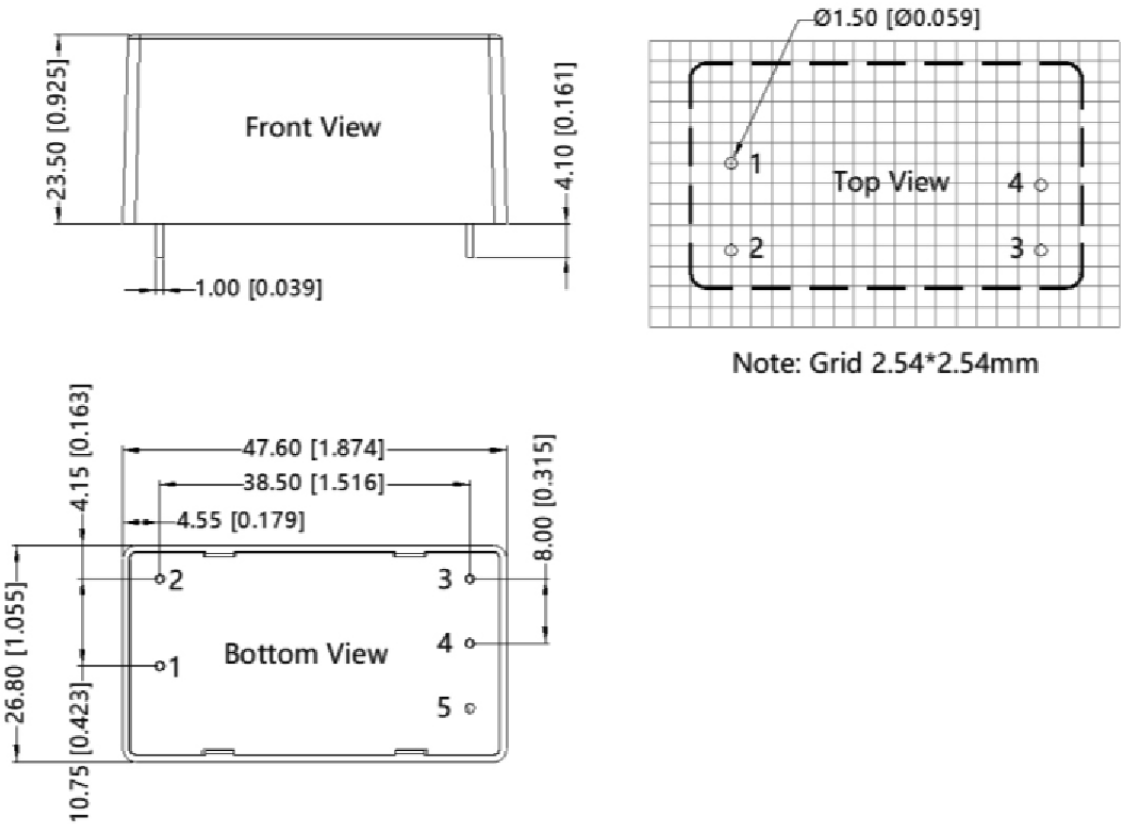

MECHANICAL DRAWING


units: mm [inch]  
wire range: 24~12 AWG  
tightening torque: Max 0.4 N·m  
tolerance: ±1.0 [±0.039]

| PIN CONNECTIONS |          |
|-----------------|----------|
| PIN             | Function |
| 1               | AC(N)    |
| 2               | AC(L)    |
| 3               | -Vo      |
| 4               | +Vo      |

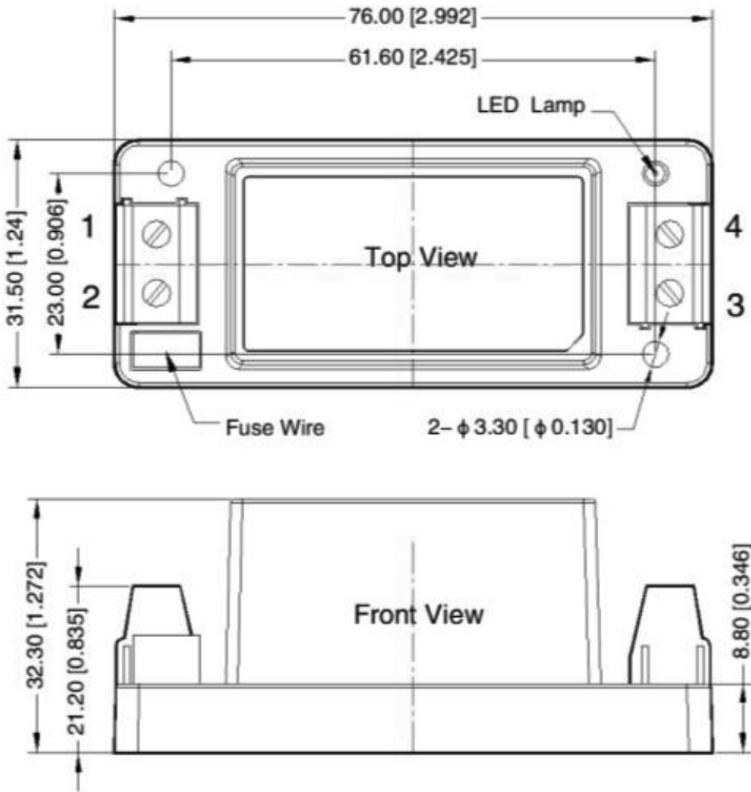

units: mm [inch]  
wire range: 24~12 AWG  
tightening torque: Max 0.4 N·m  
mounting rail: TS35, must be connected to safety ground  
tolerance: ±1.0 [±0.039]

| PIN CONNECTIONS |          |
|-----------------|----------|
| PIN             | Function |
| 1               | AC(N)    |
| 2               | AC(L)    |
| 3               | -Vo      |
| 4               | +Vo      |

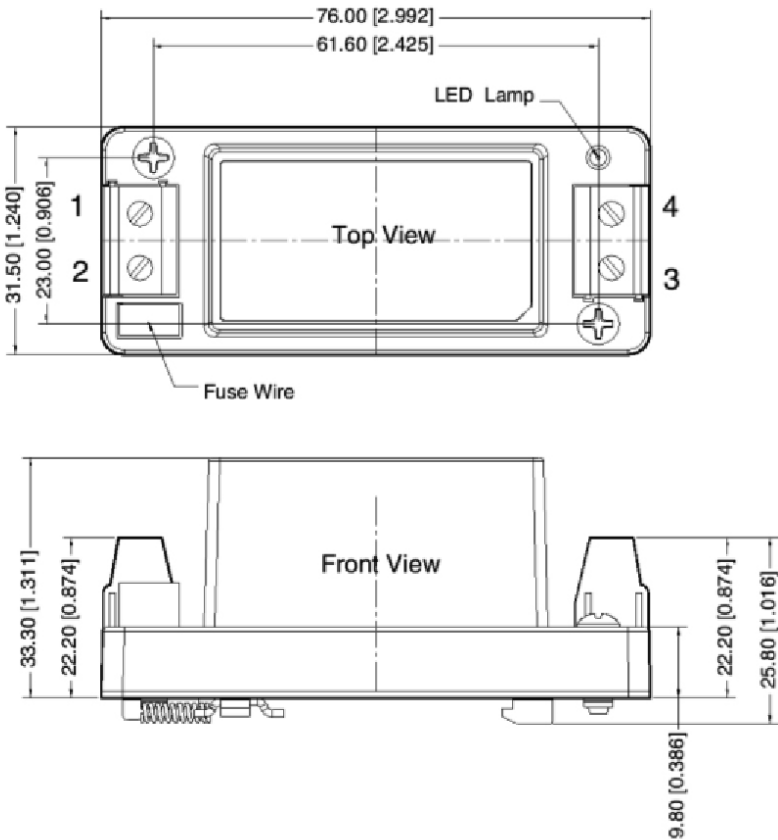

APPLICATION DESIGN REFERENCE

Figure 1

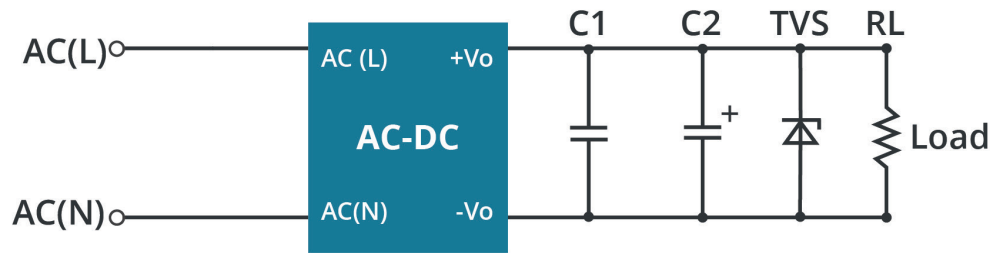


Table 1

| Part No.   | C1(μF)  | C2(μF)    | TVS      |
|------------|---------|-----------|----------|
| PSK-15D-3  | 1μF/50V | 220μF/16V | SMBJ7.0A |
| PSK-15D-5  |         | 220μF/16V | SMBJ7.0A |
| PSK-15D-9  |         | 100μF/25V | SMBJ12A  |
| PSK-15D-12 |         | 100μF/25V | SMBJ20A  |
| PSK-15D-15 |         | 100μF/25V | SMBJ20A  |
| PSK-15D-24 |         | 100uF/35V | SMBJ30A  |

Note: 2A / 300V, slow-blow fuse integrated into unit.

Output Filtering Components:  
An electrolytic capacitor with high frequency operation, low ESR, and at least 20% margin on rated output voltage is recommended for C2. C1 should be a ceramic capacitor and the TVS will help protect downstream electronics in the unlikely event of converter failure.

EMC RECOMMENDED CIRCUIT

Figure 2  
EMC APPLICATION CIRCUIT WITH HIGHER REQUIREMENTS


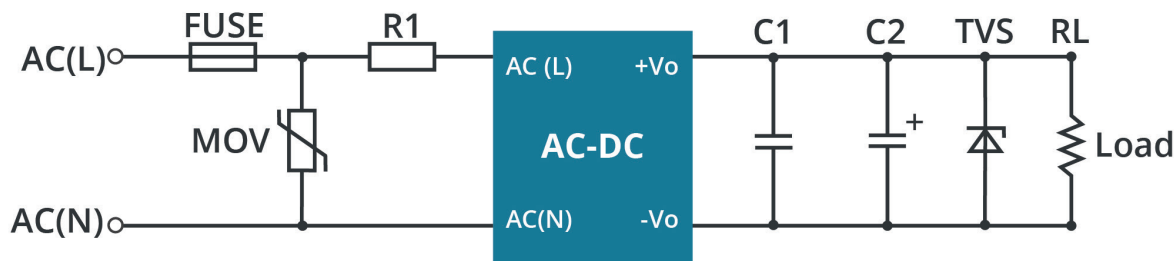


Table 2

| Components | Recommended Value               |
|------------|---------------------------------|
| FUSE       | 3.15A/300V, slow-blow, required |
| MOV        | S14K350                         |
| R1         | 6.8Ω/3W                         |

EMC RECOMMENDED CIRCUIT (CONTINUED)

Figure 3  
RECOMMENDED CIRCUIT FOR CLASS I EQUIPMENT

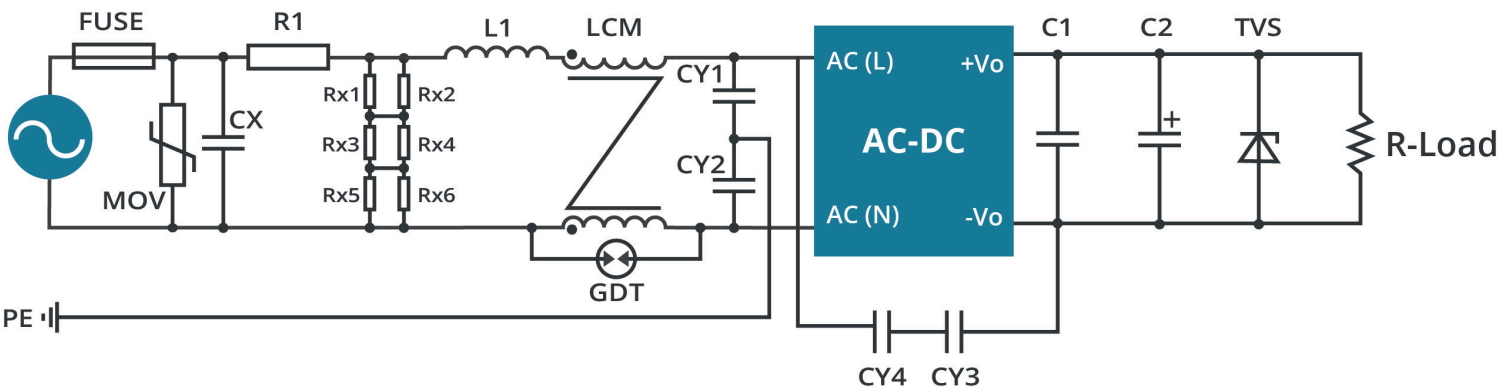


Recommended when the output terminal of the product needs to be connected to PE or connected to PE through a Y capacitor

Table 3

| Components | Recommended Value                      |
|------------|----------------------------------------|
| FUSE       | 3.15A/300V, slow-blow, required        |
| MOV        | S14K350                                |
| CX         | 334K/305Vac                            |
| R1         | 12Ω/5W (wire-wound resistor, required) |
| L1         | 1.2mH/0.5A                             |
| CY1/CY2    | 2.2nF/400Vac                           |
| CY3/CY4    | 1nF/400Vac                             |
| GDT        | 300V/1KA                               |
| LCM        | 20mH                                   |


Note: Rx1/Rx2/Rx3/Rx4/Rx5/Rx6 is the bleeder resistance of CX, and the recommended resistance value is 1.5MΩ/150Vdc.

## DERATING CURVE

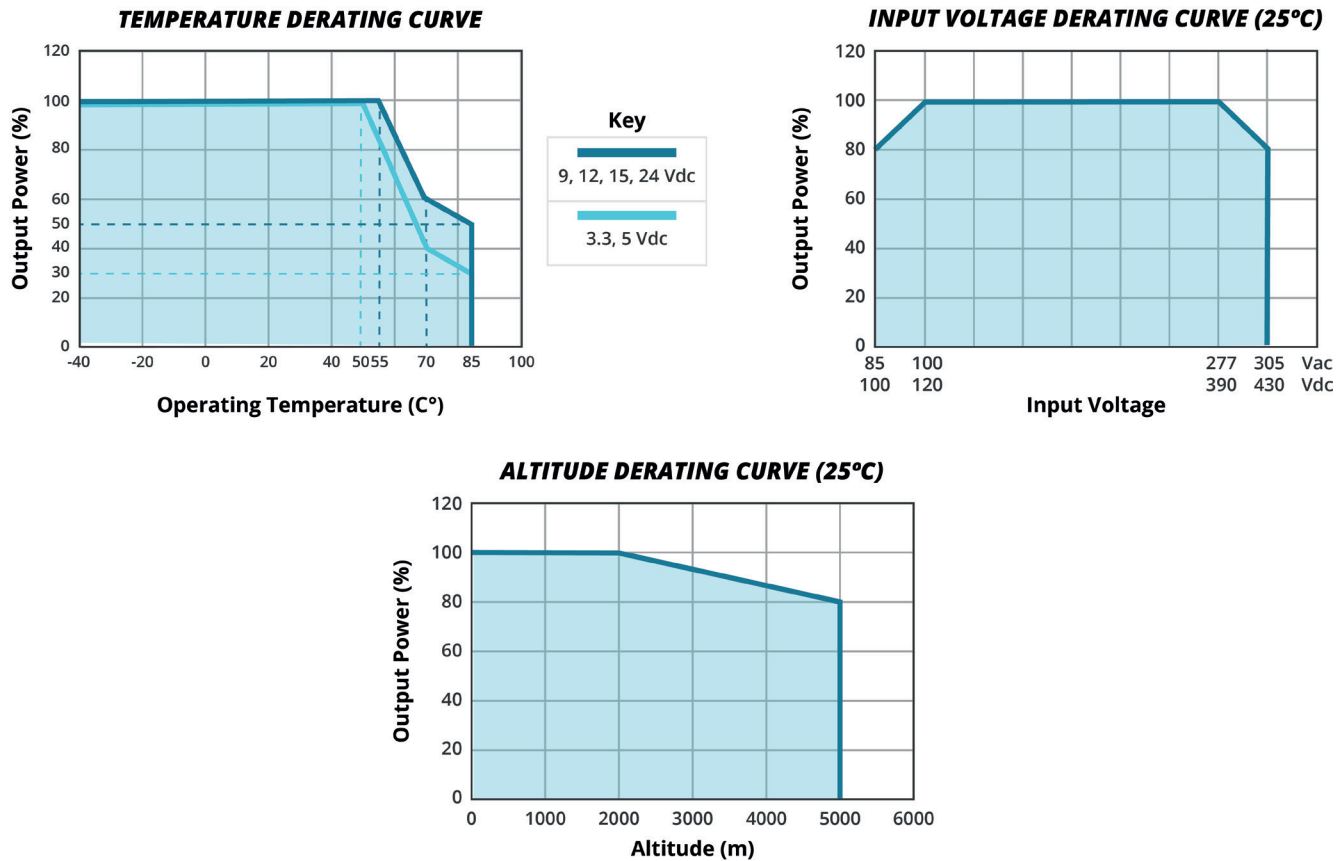

Note: 1. With an AC input between 85~100V/277~305Vac and a DC input between 100~120V/390~430Vdc, the output power must be derated as per temperature derating curves.  
2. This product is suitable for applications using natural air cooling; for applications in closed environment please consult with CUI.

## EFFICIENCY CURVES

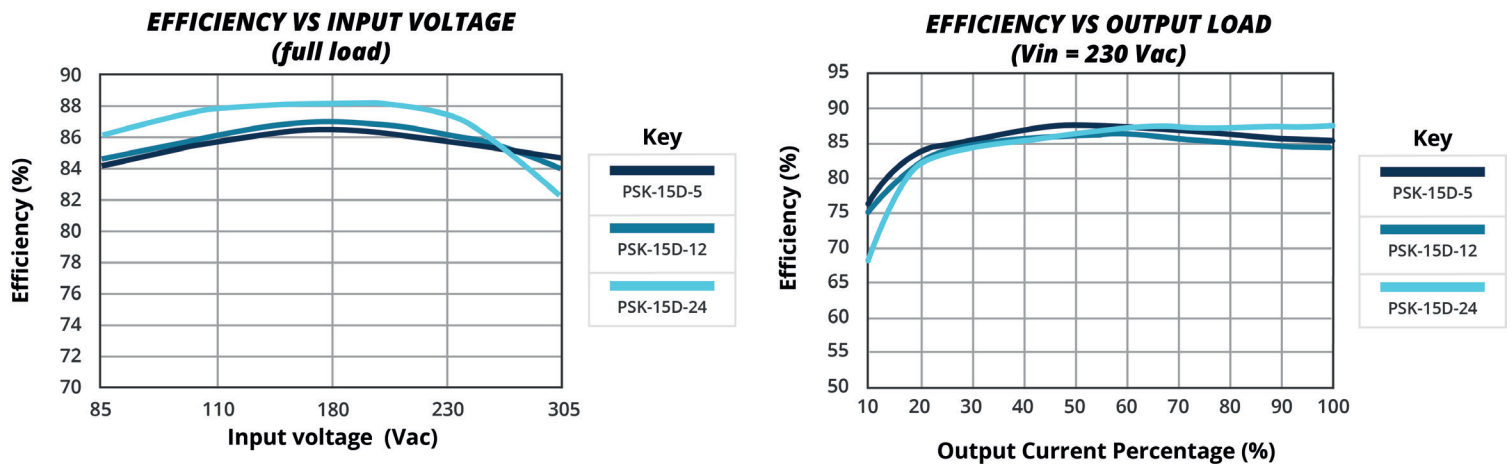

## REVISION HISTORY

| rev. | description                                                                                                                                                     | date       |
|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| 1.0  | initial release                                                                                                                                                 | 02/15/2021 |
| 1.01 | over voltage category added to features                                                                                                                         | 04/06/2021 |
| 1.02 | per PCN-65631480R-01, the no-load power consumption of the 5 Vdc and 12 Vdc output variants was modified to 0.3 W (max) for all date codes 2148 (YYWW) or later | 12/13/2021 |
| 1.03 | derating and efficiency curves updated                                                                                                                          | 01/25/2022 |
| 1.04 | no load power consumption updated                                                                                                                               | 05/03/2022 |
| 1.05 | added UKCA                                                                                                                                                      | 05/26/2022 |
| 1.06 | medical icon added                                                                                                                                              | 05/04/2023 |
| 1.07 | isolation voltage updated, EMC circuit for Class I added                                                                                                        | 01/10/2024 |
| 1.08 | no load power consumption updated                                                                                                                               | 03/05/2024 |

The revision history provided is for informational purposes only and is believed to be accurate.



**Headquarters**  
20050 SW 112th Ave.  
Tualatin, OR 97062  
**800.275.4899**

Fax 503.612.2383  
**cui.com**  
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.