




+ RELAYS, CONTACTORS & SWITCHES

1/5-SIZE RELAYS

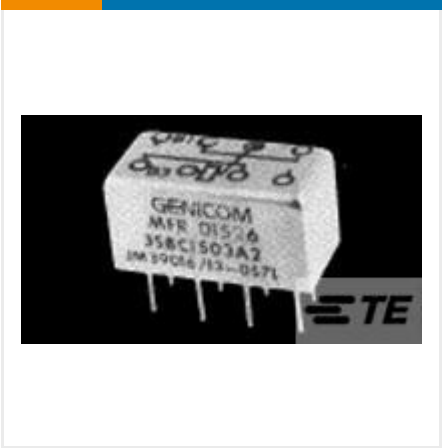

✓ Active

TE CONNECTIVITY (TE)
3SBC2017A2 = M39016/13-072P
CII | 3SBC 1/5-Size Relay

3SBC2017A2
TE Internal Number: 2-1617073-0
Mil-Spec: M39016/13-072P

Not EU RoHS Compliant
Not EU ELV Compliant
Contact Arrangement 2 Form C, DPDT, 2 C/O
Input Voltage (VDC) 26.5
Coil Suppression Diode Without
Contact Current Rating (A) 2
Coil Voltage Rating (VDC) 26.5

↓ 3D PDF

DOCUMENTATION

CAD Files

3D PDF
PDF
3D

Customer View Model
2D_DXF.ZIP
English

Customer View Model
3D_IGS.ZIP
English

Customer View Model
3D_STP.ZIP
English

5-1773450-5_sec1_3SBC

PDF

English

FEATURES



Please review product documents or [contact us](#) for the latest agency approval information.

Product Type Features

- Enclosure Type** Hermetically Sealed
- MOSFET Driver** Without
- Coil Latching** Without
- Product Type** Relay
- Relay Type** Military/Aerospace High Performance

Configuration Features

- Transistor Driver** Without

Electrical Characteristics

- Input Voltage (VDC)** 26.5
- Coil Suppression Diode** Without
- Coil Voltage Rating (VDC)** 26.5
- Coil Resistance (Ω)** 1350
- Coil Power Rating (DC) (mW)** 520
- Vibration** 30G's, 10 – 3000Hz
- Actuating System** DC
- Coil Power Measurement** Milliwatts
- Coil Magnetic System** Non-Polarized, Monostable
- Coil Polarity Protection Diode** Without
- Shock** 75G's, 6ms

Contact Features

- Contact Arrangement** 2 Form C, DPDT, 2 C/O
- Contact Current Rating (A)** 2

Termination Features

- Termination Type** PC Pins

Mechanical Attachment

- Mounting Type** Chassis Mount

Usage Conditions

- Operating Temperature Range (°C)** -65 – 125

Statement of Compliance

Statement of Compliance

PDF