

CATALOG LISTING
BZ-RW922-P4

PAGE 1 OF 1

M

ISSUE
6

REVISIONS
A CO-77863
G J W
9 MAY 96

FORMTEK

DRAWN

G J W 9 MAY 96


CHECK

CHECK

CHECK

RELEASE NO. PR-481

REPLACES

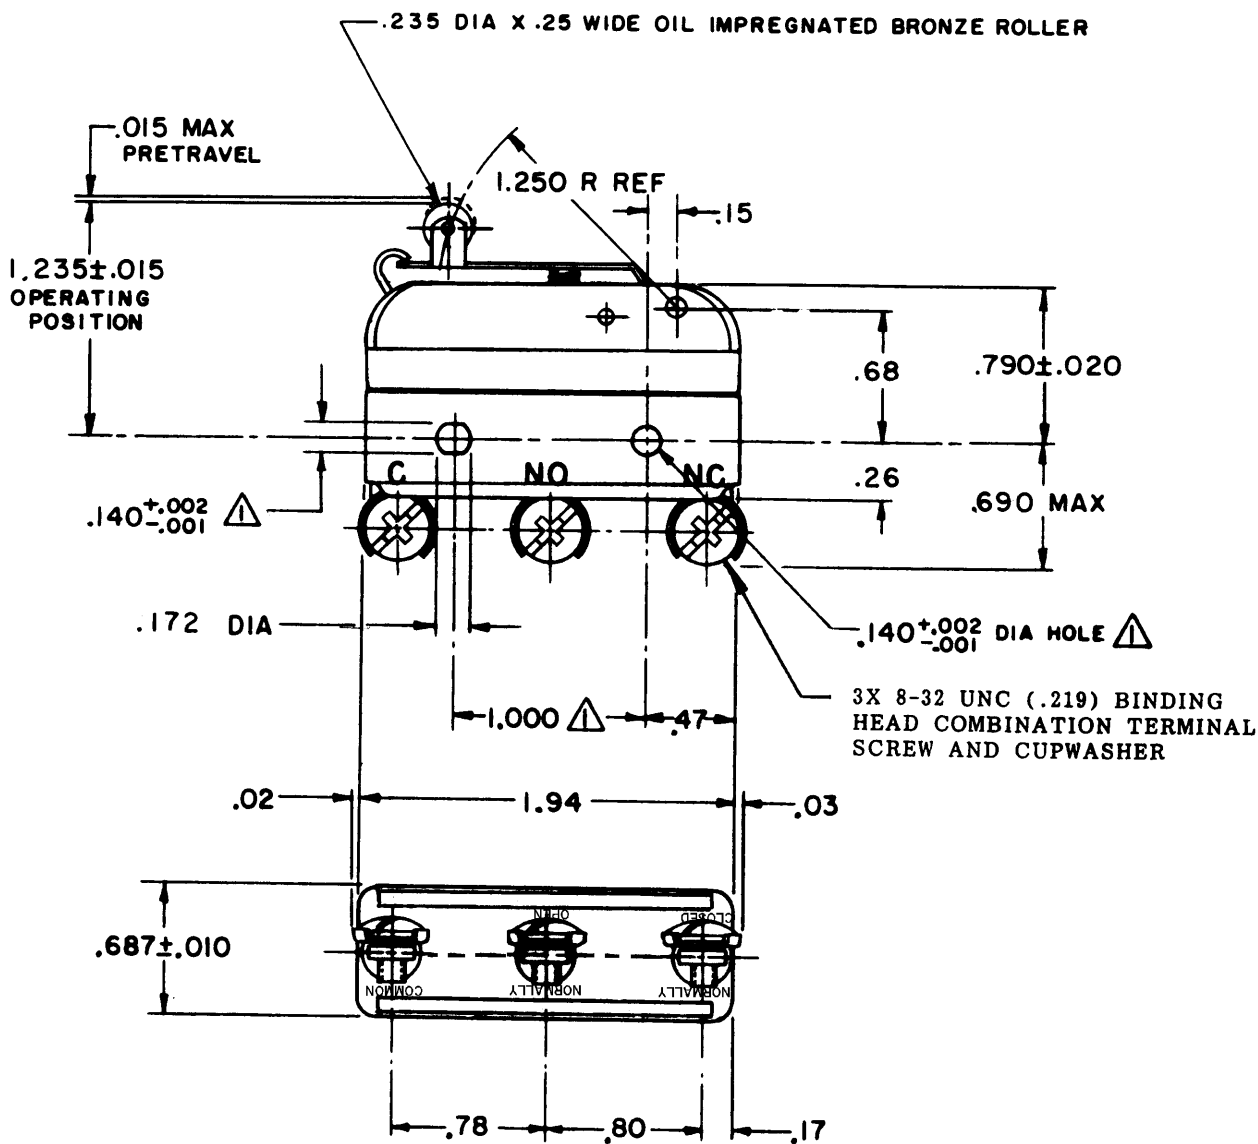

NOTE -
 ▲ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
 OF .139 MAX DIA ON 1.000 ± .002 CENTERS
 2 - PLASTIC PARTS ARE MADE OF MINERAL FILLED PHENOLICS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE — — — 12 OZ MAX	CONTACT ARRANGEMENT SPDT	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE — — — 4 OZ MIN	L95	ONE PLACE (.0) ±.030	
DIFFERENTIAL TRAVEL — — .0005 — .0010	10A 125, 250 OR 480 VAC	TWO PLACE (.00) ±.015	
OVERTRAVEL — — — .100 MIN	1/8HP 125 VAC, 1/4HP 250 VAC	THREE PLACE (.000) ±.005	
		ANGLES ±	
		WEIGHT	

