


SF2446E

**435 MHz
SAW Filter**



SM3030-6

Maximum Rating


Rating	Value	Units
Input Power Level	10	dB _m
DC Voltage	10	V
Operable Temperature Range	-45 to +125	°C
Specification Temperature Range	-40 to +85	°C
Storage Temperature in Tape and Reel	-45 to +85	°C
Moisture Sensitivity Level	1	MSL

Electrical Characteristics

Characteristic	Sym	Notes	Min	Typ	Max	Units
Center Frequency	f _C			435		MHz
3dB Bandwidth			10	23		MHz
Insertion Loss, 430 to 440 MHz	IL			1.9	3.0	dB
Amplitude Ripple, 430 to 440 MHz				0.8	2.0	dB
Attenuation Referenced to 0 dB						dB
0.3 to 386.6 MHz			45	54		
386.6 to 396.6 MHz			46	52		
474.8 to 480.8 MHz			45	54		
480.8 to 680 MHz			45	50		
680 to 1000 MHz			35	46		
Temperature Coefficient of Frequency				-36		ppm/°C

Case Style	SM3030-6 3.0 x 3.0 mm Nominal Footprint
Lid Symbolization (Y=year, WW=week, S=shift) dot=pin 1 indicator	B3, YWWS

Measurement Circuit


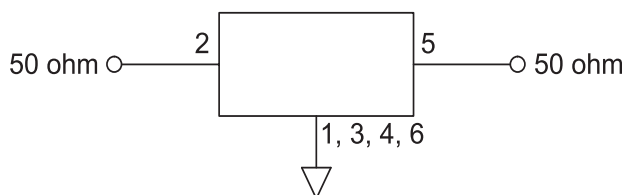


CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.



NOTES:

1. US and international patents may apply.
2. Murata, stylized Murata logo, and Murata N.A., Inc. are registered trademarks of Murata Manufacturing Co., Ltd.

Frequency Characteristics

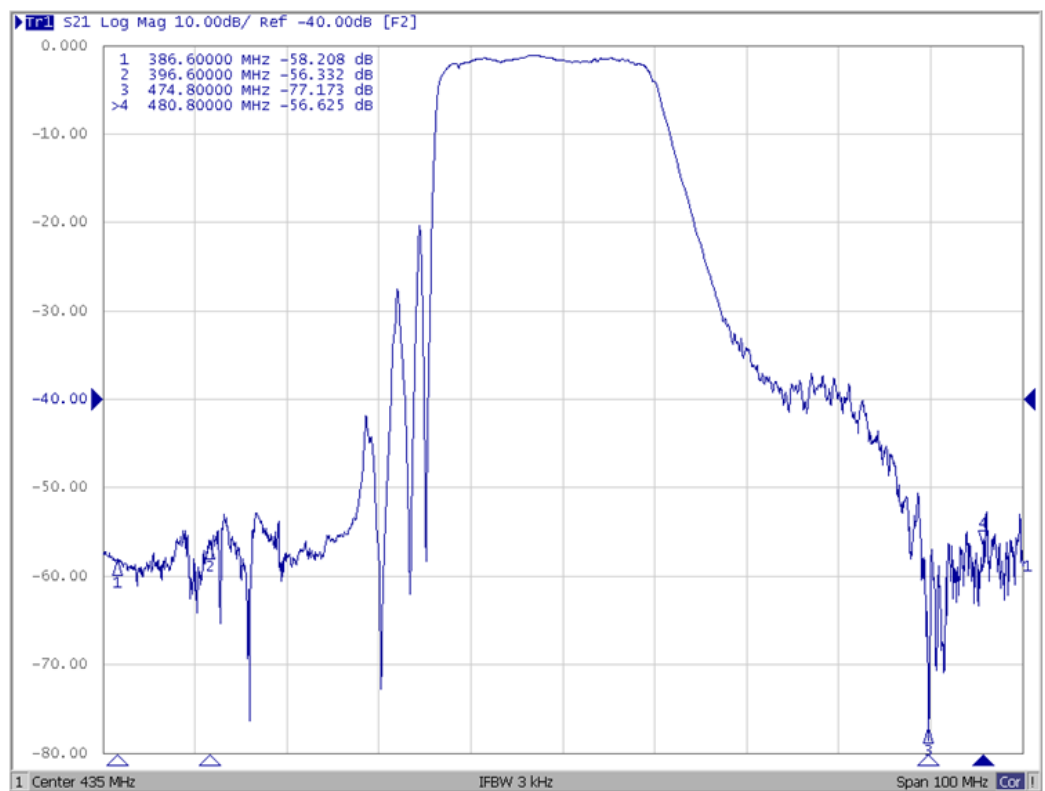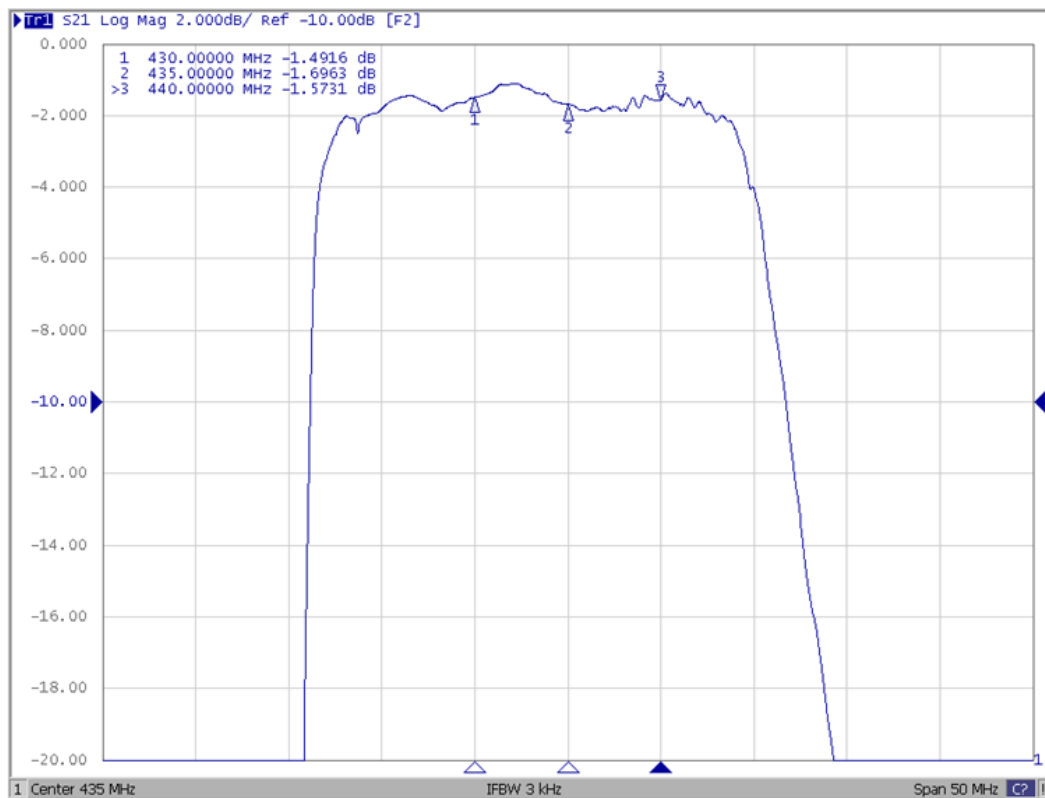

6-Terminal Ceramic Surface-Mount Case 3.0 X 3.0 mm Nominal Footprint



PCB Footprint Top View


Case and PCB Footprint Dimensions

Dimension	mm			Inches		
	Min	Nom	Max	Min	Nom	Max
A	2.87	3.00	3.13	0.113	0.118	0.123
B	2.87	3.00	3.13	0.113	0.118	0.123
C	1.12	1.25	1.38	0.044	0.049	0.054
D	0.77	0.90	1.03	0.030	0.035	0.040
E	2.67	2.80	2.93	0.105	0.110	0.115
F	1.47	1.60	1.73	0.058	0.063	0.068
G	0.72	0.85	0.98	0.028	0.033	0.038
H	1.37	1.50	1.63	0.054	0.059	0.064
I	0.47	0.60	0.73	0.019	0.024	0.029
J	1.17	1.30	1.43	0.046	0.051	0.056
K		3.20			0.126	
L		1.70			0.067	
M		1.05			0.041	
N		0.81			0.032	
O		0.38			0.015	



Case Materials

Materials	
Solder Pad Plating	0.3 to 1.0 μm Gold over 1.27 to 8.89 μm Nickel
Lid Plating	2.0 to 3.0 μm Nickel
Body	Al_2O_3 Ceramic
Pb Free	

Top View

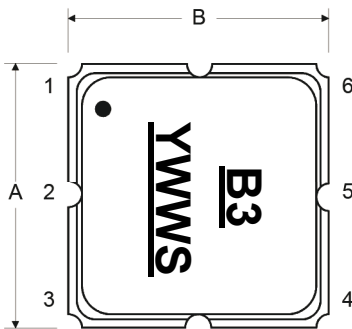

Bottom View

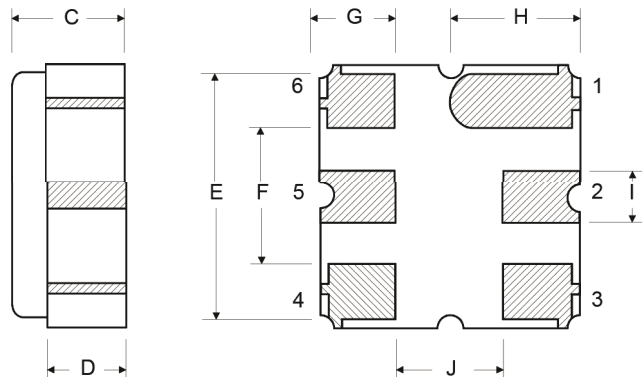

Tape and Reel Specifications

See Detail "A"


12.0

100 REF.

"B" REF.

Technical drawing of a circular part. The drawing shows a cross-section of a circular component with a central hole. The outer diameter is dimensioned as 13.0. The inner diameter is dimensioned as 20.2. The thickness of the part is dimensioned as 2.0. The drawing includes a center line and a section line.

Carrier Tape Dimensions	
Ao	4.25 mm
Bo	4.25 mm
Ko	1.30 mm
Pitch	8.0 mm
W	12.0 mm

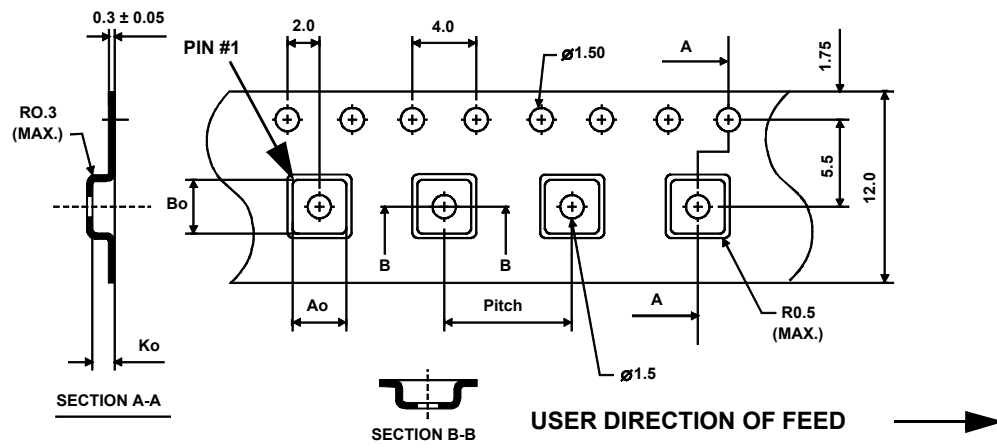

Recommended Reflow Profile:

