
## **PRODUCT DATA DRAWING**

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	NRN 46869	07/22	
			SEE PDM

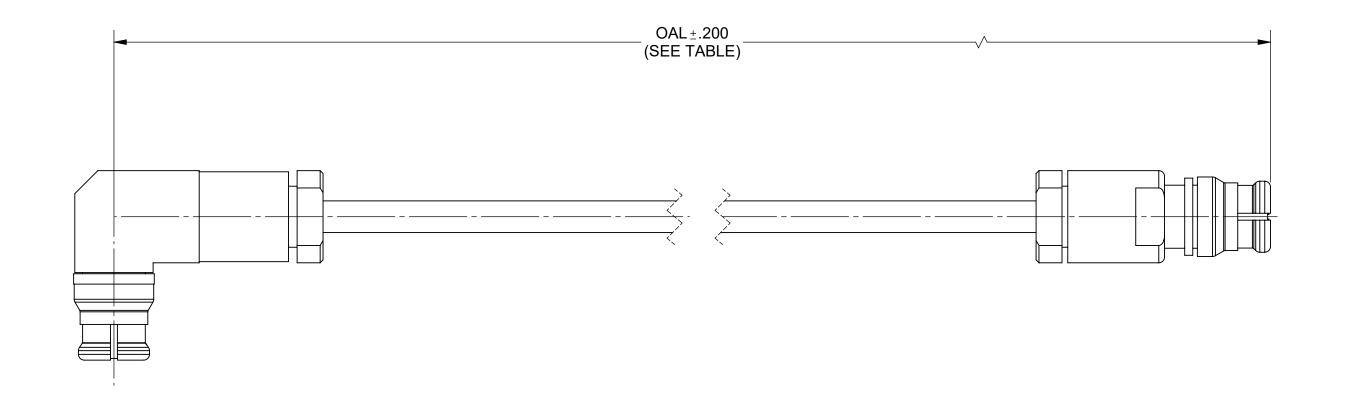

**MATERIAL:** 

CONNECTORS: SMP FEMALE R/A (1222-40094)

SMP FEMALE (1221-40117)

CABLE: .047 SUPERFLEX CABLE

PERFORMANCE:

IMPEDANCE: 50 OHMS

FREQ. RANGE: DC TO 33.0 GHz

				SV P/N	OAL
				7012-2004	3.000
				7012-2005	6.000
MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES:	UNLESS OTHERWISE SPECIFIE		Amphenol

	OLL HOTES
FINISH:	SEE NOTES
SURFACE	AREA: N/A
	PROPRIETARY
IS THE SC ANY REP	RMATION CONTAINED IN THIS DRAW LE PROPERTY OF SV MICROWAVE, ODUCTION IN PART OR AS A WHOL THE WRITTEN PERMISSION OF

DIVILITOIONO AILE IN INOTILO TOLLIVANOLO.		
FRACTIONAL: ±1/64 ANGULAR: X° ±1°0'		
X°X' ±15' DECIMAL: .X ±.030 .XX +.010		
.XXX ±.005		
INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994		

THIRD ANGLE PROJECTION

r 3	1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CONNERS & EDGES 005 R. MAX. 4) CHAM. 15T ALAST THREADS. 5) SURFACE ROUGHINESS 63.MILSTD-10. 6) DIAL ON COMMON CENTERS TO BE CONCENTRI WITHIN COMMON CENTERS TO BE CONCENTRI 7) REMOVE ALL BURRS

DRAWN:	SJ 07/21/22
CHECKED:	SEE PDM
APPROVED:	SEE PDM

SMP FEMALE R/A TO SMP FEMALE ASSEMBLY FOR .047 SUPERFLEX CABLE

SIZE <b>B</b>	DWG. NO.	7012-2004-2005	
SCALE: 6:1			SHEET 1 OF 1