




PROTECTION MALE CAP

**R125.802.000**

Series : SMA

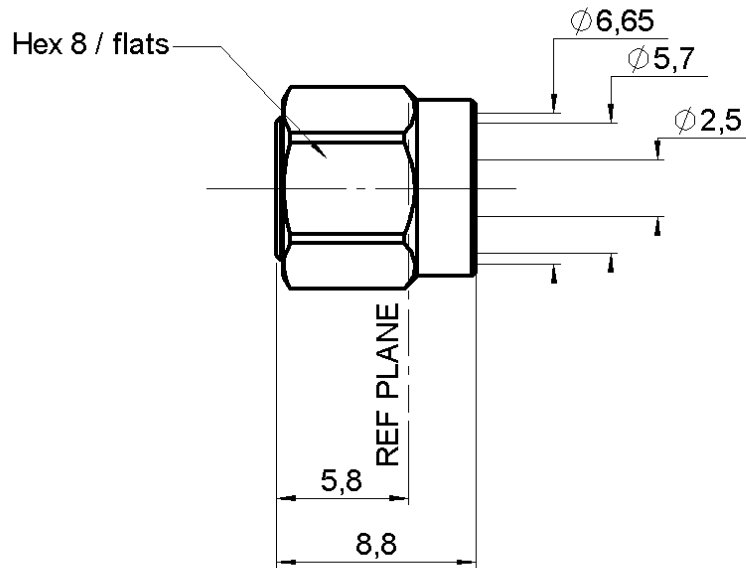

All dimensions are in mm.



| COMPONENTS     | MATERIALS       | PLATINGS (µm)          |
|----------------|-----------------|------------------------|
| BODY           | STAINLESS STEEL | GOLD 0.5 OVER NICKEL 2 |
| CENTER CONTACT | -               | -                      |
| OUTER CONTACT  | -               | -                      |
| INSULATOR      | -               | -                      |
| GASKET         | SILICONE RUBBER | -                      |
| OTHERS PARTS   | STAINLESS STEEL | GOLD 0.5 OVER NICKEL 2 |
| -              | -               | -                      |
| -              | -               | -                      |

Issue : 0314 C

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



## PROTECTION MALE CAP

**R125.802.000**

Series : SMA

**PACKAGING**

| Standard   | Unit              | Other             |
|------------|-------------------|-------------------|
| <b>100</b> | <b>'W' option</b> | <b>Contact us</b> |

**SPECIFICATION****ELECTRICAL CHARACTERISTICS**

|                                 |        |                          |
|---------------------------------|--------|--------------------------|
| Impedance                       | NA     | $\Omega$                 |
| Frequency                       | NA     | GHz                      |
| VSWR                            | NA +   | 0.000 x F(GHz) Maxi      |
| Insertion loss                  | NA     | $\sqrt{F}$ (GHz) dB Maxi |
| RF leakage                      | NA - ( | F(GHz)) dB Maxi          |
| Voltage rating                  | NA     | Veff Maxi                |
| Dielectric withstanding voltage | NA     | Veff mini                |
| Insulation resistance           | NA     | M $\Omega$ mini          |

**ENVIRONMENTAL**

|                       |          |           |
|-----------------------|----------|-----------|
| Operating temperature | -65/+165 | ° C       |
| Hermetic seal         | NA       | Atm.cm3/s |
| Panel leakage         | NA       |           |

**OTHERS CHARACTERISTICS**

Assembly instruction

Others :

**MECHANICAL CHARACTERISTICS**

|                            |                 |
|----------------------------|-----------------|
| Center contact retention   |                 |
| Axial force – Mating end   | NA N mini       |
| Axial force – Opposite end | NA N mini       |
| Torque                     | NA N.cm mini    |
| Recommended torque         |                 |
| Mating                     | NA N.cm         |
| Panel nut                  | NA N.cm         |
| Mating life                | 500 Cycles mini |
| Weight                     | 2.400 g         |

Issue : 0314 C

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

