
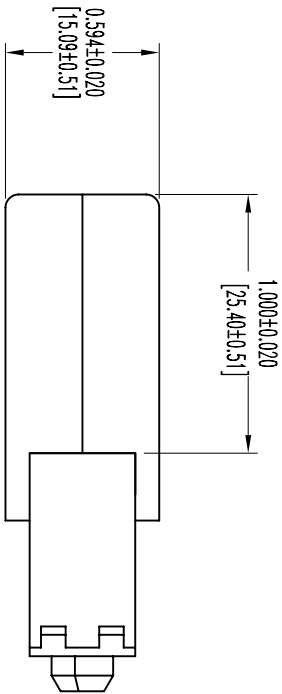
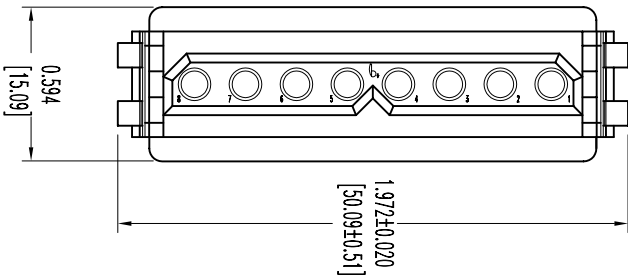


POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND ASSUMES ALL RESPONSIBILITIES AND ASSUMES RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
12-28-05	NC	ECO 25257		YK	

SK6888

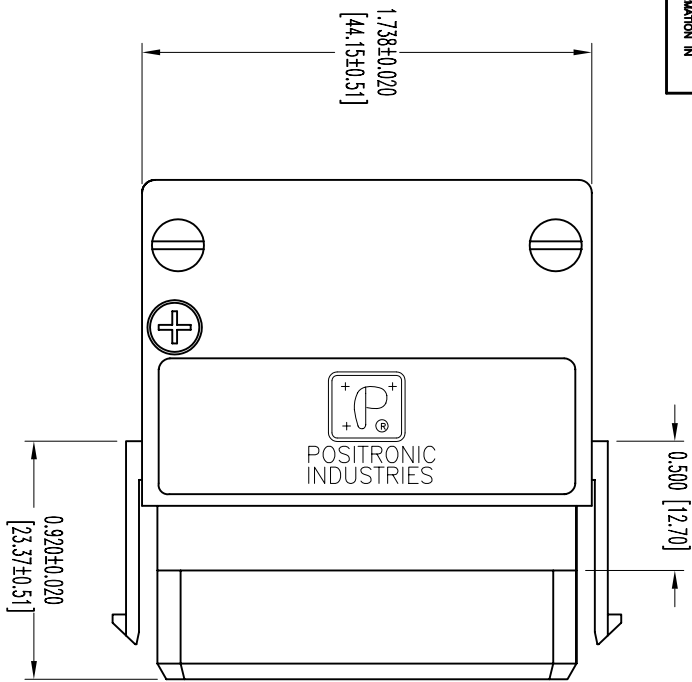

NOTES:

1. MATERIALS AND FINISHES:

INSULATOR: GLASS FILLED POLYESTER, UL 94V-0, COLOR BLUE.

HOOD: GLASS FILLED POLYESTER, UL 94V-0, COLOR BLUE.

HOOD SCREWS: STEEL, ZINC PLATE WITH CHROMATE SEAL.

CABLE CLAMPS: STEEL, NICKEL PLATE.

CABLE CLAMP SCREWS: STEEL, ZINC PLATE WITH CHROMATE SEAL.

2. ELECTRICAL CHARACTERISTICS:

INSULATOR RESISTANCE: 5 G OHMS PER IEC 512-2, TEST 3a, METHOD A.

WORKING VOLTAGE: 600 VAC.

3. WORKING TEMPERATURE: -55°C TO +125°C

4. CONNECTORS ARE ROHS COMPLIANT PER ROHS DIRECTIVE 2002/95/EC OF 27 JAN 2003.

5. DIMENSIONS ARE INCHES[MILLIMETERS]



POSITRONIC INDUSTRIES INC.
www.connectpositronic.com



DECIMAL TOL.
 ± 0.015 [0.38]

PCS SERIES

SCALE
N.T.S.

DRAWN BY
YK

REV.

ANGULAR TOL.
 $\pm 5^\circ$

DATE
12-28-05

DRAWING NUMBER
SK6888

REV.
NC

PLA08F7050/AA