PFE1500 Series

1500 W AC-DC Front End Power Supplies

The PFE1500 is a 1500 W AC to DC power-factor-corrected (PFC) power supply that converts standard AC or HVDC power into a main output of 12 VDC for powering intermediate bus architectures (IBA) in high performance and reliability servers, routers, and network switches.

The PFE1500 Series meets international safety standards and displays the CE-Mark for the European Low Voltage Directive (LVD).



RoHS Compliant

Key Features & Benefits

- High Efficiency, typ. 94% at half load (meet 80+ Platinum Efficiency)
- Universal input voltage range: 90-264 VAC
- High voltage DC input: 180-350 VDC (Optional for 400 VDC)
- AC input with power factor correction
- Always-On standby output (model dependent):
  - Programmable 3.3 V / 5 V (16.5 W)
  - 12 V @ 3 A (36 W)
- Hot-plug capable
- Parallel operation with active digital current sharing
- Digital controls for improved performance
- High density design: 35 W/in^3
- Small form factor: 54.5(W) x 40.0(H) x 321.5(L) mm
- I2C communication interface for control, programming and monitoring with Power Management Bus protocol and PSMI Protocol
- Over temperature, output over voltage and overcurrent protection
- 256 Bytes of EEPROM for user information
- 2 Status LEDs: OK and FAIL with fault signaling

Applications

- High Performance Servers
- Routers
- Switches

Please read our datasheet & drawing disclaimer here.

Downloaded from Arrow.com.

1. ORDERING INFORMATION

MODELS WITH PROGRAMMABLE 3.3 V / 5 V STANDBY OUTPUT

PFE	1500	-	12	-	054	X	X
Product Family	**Power Level**	**Dash**	**V1 Output**	**Dash**	**Width**	**Airflow**	**Input** [3]
PFE Front-End	1500 W		12 V		54 mm	N: Normal [1] R: Reverse [2]	A: C14 Socket AC: C16 Socket AH: HVDC Socket

[1] "N" Normal Airflow from Output connector to Input AC socket
Ordering PN: PFE1500-12-054NA for C14 AC input connector, input range is 180 VDC ~ 350 VDC and 90 VAC ~ 264 VAC
Ordering PN: PFE1500-12-054NAC for C16 AC input connector, input range is 180 VDC ~ 350 VDC and 90 VAC ~ 264 VAC
Ordering PN: PFE1500-12-054NAH for both AC and HVDC (RF-203-D-1.0) input connector, input range is 180 ~ 400 VDC and 90 ~ 264 VAC

[2] "R" Reverse Airflow from Input AC socket to Output connector
Ordering PN: PFE1500-12-054RA for C14 AC input connector, input range is 180 VDC ~ 350 VDC and 90 VAC ~ 264 VAC
Ordering PN: PFE1500-12-054RAC for C16 AC input connector, input range is 180 VDC ~ 350 VDC and 90 VAC ~ 264 VAC
Ordering PN: PFE1500-12-054RAH for both AC and HVDC (RF-203-D-1.0) input connector, input range is 180 ~ 400 VDC and 90 ~ 264 VAC

[3] For difference of the AC socket and mechanical outline refer to section 13.

MODELS WITH 12 V STANDBY OUTPUT

PFE	1500	-	12	N	X	S412
Product Family	**Power Level**	**Dash**	**V1 Output**	**Airflow**	**Input** [6]	**VSB Output**
PFE Front-End	1500 W		12 V	N: Normal [4] R: Reverse [5]	A: C14 Socket AC: C16 Socket AH: HVDC Socket	12VSB

[4] "N" Normal Airflow from Output connector to Input AC socket
Ordering PN: PFE1500-12NAS412 for C14 AC input connector, input range is 180 VDC ~ 350 VDC and 90 VAC ~ 264 VAC
Ordering PN: PFE1500-12NACS412 for C16 AC input connector, input range is 180 VDC ~ 350 VDC and 90 VAC ~ 264 VAC
Ordering PN: PFE1500-12NAHS412 for both AC and HVDC (RF-203-D-1.0) input connector, input range is 180 VDC ~ 400 VDC and 90 VAC ~ 264 VAC

[5] "R" Reverse Airflow from Input AC socket to Output connector
Ordering PN: PFE1500-12RAS412 for C14 AC input connector, input range is 180 VDC ~ 350 VDC and 90 VAC ~ 264 VAC

[6] For difference of the AC socket and mechanical outline refer to section 13.

Downloaded from Arrow.com.

2. OVERVIEW

The PFE1500 Series AC/DC power supply is combination of analog and DSP control, highly efficient front-end power supply. It incorporates resonance-soft-switching technology and interleaved power trains to reduce component stresses, providing increased system reliability and very high efficiency. With a wide input operational voltage range and minimal derating of output power with input voltage and temperature, the PFE1500 power supply maximizes power availability in demanding server, network, and other high availability applications. The supply is fan cooled and ideally suited for integration with a matching airflow paths. The PFC stage is an analogue solution; MCU is used to communicate with DSP chip on secondary side. The DC/DC stage uses soft switching resonant techniques in conjunction with synchronous rectification. An active OR-ing device on the output ensures no reverse load current and renders the supply ideally suited for operation in redundant power systems. The always-on standby output, provides power to external power distribution and management controllers. It is protected with an active OR-ing device for maximum reliability. Status information is provided with front-panel LEDs.

In addition, the power supply can be controlled and the fan speed set via the I2C bus. The I2C bus allows full monitoring of the supply, including input and output voltage, current, power, and inside temperatures. The fan speed is adjusted automatically depending on the actual power demand and supply temperature and can be overridden through the I2C bus.

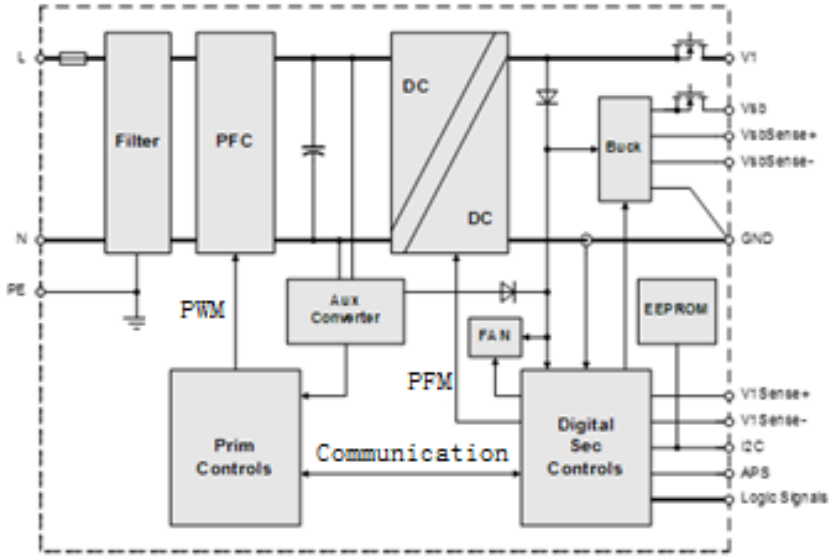


Figure 1. PFE1500 Series Block Diagram

3. ABSOLUTE MAXIMUM RATINGS

Stresses in excess of the absolute maximum ratings may cause performance degradation, adversely affect long-term reliability, and cause permanent damage to the supply.

PARAMETER		DESCRIPTION / CONDITION	MIN	NOM	MAX	UNIT
Vi maxc	Maximum Input	Continuous			264	VAC

© 2024 Bel Fuse Inc.

Downloaded from Arrow.com.

4. INPUT SPECIFICATIONS

General Condition: T_A = 0… 45°C unless otherwise specified.

PARAMETER		DESCRIPTION / CONDITION	MIN	NOM	MAX	UNIT
$V_{i\,nom}$	Nominal Input Voltage		100		240	VAC
			200		350[1]	VDC
V_i	Input Voltage Ranges	Normal operating ($V_{i\,min}$ to $V_{i\,max}$)	90		264	VAC
			180		350	VDC
$V_{i\,red}$	Derating Input Voltage Range	See Figure 7	90		180	VAC
$I_{i\,max}$	Max Input Current				15	A_{rms}
$I_{i\,p}$	Inrush Current Limitation	$V_{i\,min}$ to $V_{i\,max}$, T_{NTC} = 25°C *(Figure 4)*			40	A_p
F_i	Input Frequency		47	50/60	64	Hz
PF	Power Factor	$V_{i\,nom}$, 50 Hz, > 0.3 $I_{1\,nom}$	0.96			W/VA
$V_{i\,on}$	Turn-on Input Voltage[2]	Ramping up	80	84	89	VAC
			169	174	180	VDC
$V_{i\,off}$	Turn-off Input Voltage	Ramping down	75	80	85	VAC
			166	171	176	VDC
η	Efficiency without Fan at AC input	$V_{i\,nom}$, 0.1·$I_{x\,nom}$, $V_{x\,nom}$, T_A = 25°C		90		%
		$V_{i\,nom}$, 0.2·$I_{x\,nom}$, $V_{x\,nom}$, T_A = 25°C		92		
		$V_{i\,nom}$, 0.5·$I_{x\,nom}$, $V_{x\,nom}$, T_A = 25°C		94		
		$V_{i\,nom}$, $I_{x\,nom}$, $V_{x\,nom}$, T_A = 25°C		92		
	Efficiency without Fan at DC input	$V_{i\,nom=336VDC}$, 0.1·$I_{x\,nom}$, $V_{x\,nom}$, T_A = 25°C		89		
		$V_{i\,nom=336VDC}$, 0.2·$I_{x\,nom}$, $V_{x\,nom}$, T_A = 25°C		92		
		$V_{i\,nom=336VDC}$, 0.5·$I_{x\,nom}$, $V_{x\,nom}$, T_A = 25°C		93.5		
		$V_{i\,nom=336VDC}$, $I_{x\,nom}$, $V_{x\,nom}$, T_A = 25°C		92		
T_{hold}	Hold-up Time	After last AC zero point to $V_1 \geq$ 10.8 V, V_{SB} within regulation, V_i = 230 VAC, $P_{x\,nom}$	10			ms

4.1 INPUT FUSE

Quick-acting 16A input fuse (5 x 20 mm) in series the L line inside the power supply protect against severe defects. The fuses are not accessible from the outside and are therefore not serviceable parts.

4.2 INRUSH CURRENT

The AC-DC power supply exhibits an X-capacitance of only 3.2 µF, resulting in a low and short peak current, when the supply is connected to the mains. The internal bulk capacitor will be charged through an NTC which will limit the inrush current.

NOTE: Do not repeat plug-in / out operations within a short time, or else the internal in-rush current limiting device (NTC) may not sufficiently cool down and excessive inrush current or component failure(s) may result.

1 For PFE1500-12-054NAH, PFE1500-12-054RAH and PFE1500-12NAHS412, normal DC operation input range is 200 VDC to 380 VDC and input range is 180 VDC to 400 VDC; input AC range is 90 VAC ~ 264 VAC.

2 The Front-End is provided with a minimum hysteresis of 3 V during turn-on and turn-off within the ranges.

Downloaded from Arrow.com.

4.3 INPUT UNDER-VOLTAGE

If the sinusoidal input voltage stays below the input under voltage lockout threshold Vi on, the supply will be inhibited. Once the input voltage returns within the normal operating range, the supply will return to normal operation again.

4.4 POWER FACTOR CORRECTION

Power factor correction (PFC) is achieved by controlling the input current waveform synchronously with the input voltage. An analog controller is implemented giving outstanding PFC results over a wide input voltage and load ranges. The input current will follow the shape of the input voltage.

4.5 EFFICIENCY

High efficiency (see *Figure 2*) is achieved by using state-of-the-art silicon power devices in conjunction with soft-transition topologies minimizing switching losses and a full digital control scheme. Synchronous rectifiers on the output reduce the losses in the high current output path. The speed of the fan is digitally controlled to keep all components at an optimal operating temperature regardless of the ambient temperature and load conditions.

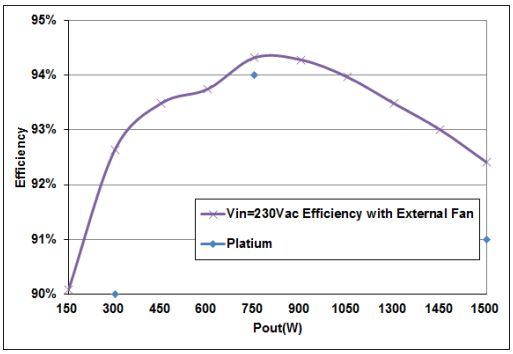


Figure 2. Efficiency vs. Load current (ratio metric loading)

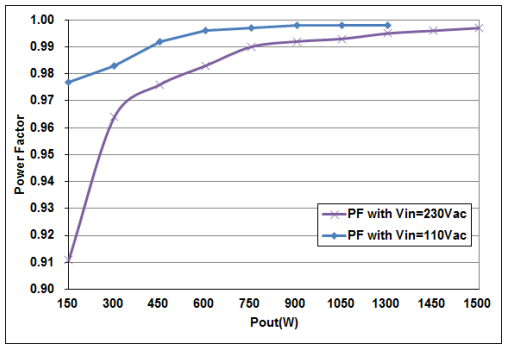


Figure 3. Power factor vs. Load current

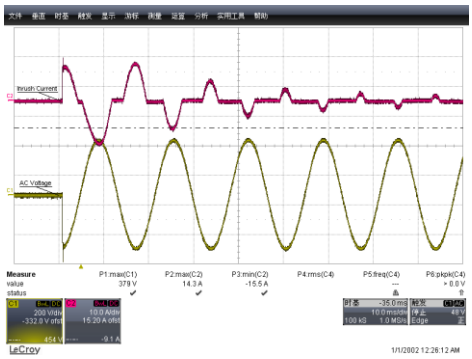


Figure 4. Inrush current, Vin = 264 VAC, 90°, CH1: Vin (200V/div), CH2: Iin (10A/div)

© 2024 Bel Fuse Inc.

Downloaded from Arrow.com.

5. OUTPUT SPECIFICATIONS

General Condition: Ta = 0… 45°C unless otherwise specified.

PARAMETER		DESCRIPTION / CONDITION		MIN	NOM	MAX	UNIT
Main Output V_1							
$V_{1\ nom}$	Nominal Output Voltage	0.5 · $I_{1\ nom}$, T_{amb} = 25 °C			12.0		VDC
$V_{1\ set}$	Output Setpoint Accuracy			-0.5		+0.5	% $V_{1\ nom}$
$dV_{1\ tot}$	Total Regulation	$V_{i\ min}$ to $V_{i\ max}$, 0 to 100% $I_{1\ nom}$, $T_{a\ min}$ to $T_{a\ max}$		-2		+2	% $V_{1\ nom}$
$P_{1\ nom}$	Nominal Output Power	264 VAC > V_{in} ≥ 180 VAC, V_1 = 12 VDC 400 VDC > V_{in} ≥180 VDC, V_1 = 12 VDC			1,500		W
	Refer to *Figure 7* for derating curve	180 VAC > V_{in} ≥ 90 VAC, V_1 = 12 VDC			1,200		W
$I_{1\ nom}$	Nominal Output Current	264 VAC > V_{in} ≥180 VAC, V_1 = 12 VDC 400 VDC > V_{in} ≥180 VDC, V_1 = 12 VDC			125		ADC
		180 VAC > V_{in} ≥ 90 VAC, V_1 = 12 VDC			100		ADC
$v_{1\ pp}$	Output Ripple Voltage	$V_{1\ nom}$, $I_{1\ nom}$, 20 MHz BW (See Section 5.1)				150	mVpp
$dV_{1\ Load}$	Load Regulation	V_i = $V_{i\ nom}$, 0 - 100 % $I_{1\ nom}$			80		mV
$dV_{1\ Line}$	Line Regulation	V_i = $V_{i\ min}$... $V_{i\ max}$			40		mV
dI_{share}	Current Sharing	Deviation from $I_{1\ tot}$ / N, I_1 > 10%		-3		+3	A
dV_{dyn}	Dynamic Load Regulation	ΔI_1 = 50% $I_{1\ nom}$, I_1 = 5 … 100% $I_{1\ nom}$, dI_1/dt = 1A/µs		-0.6		0.6	V
T_{rec}	Recovery Time	ΔI_1 = 50% $I_{1\ nom}$, I_1 = 5 … 100% $I_{1\ nom}$, dI_1/dt = 1A/µs, recovery within 1% of $V_{1\ nom}$				1	ms
$t_{AC\ V1}$	Start-up Time from AC					2	sec
$t_{V1\ rise}$	Rise Time	V_1 = 10…90% $V_{1\ nom}$		0.5		10	ms
C_{Load}	Capacitive Loading	T_a = 25°C				30,000	µF
3.3/5 V_{SB} Standby Output							
$V_{SB\ nom}$	Nominal Output Voltage	0.5 · $I_{SB\ nom}$, T_{amb} = 25°C	VSB_SEL = 1		3.3		VDC
$V_{SB\ set}$	Output Setpoint Accuracy		VSB_SEL = 0		5.0		VDC
			VSB_SEL = 0 / 1	-0.5		+0.5	% V_{1nom}
$dV_{SB\ tot}$	Total Regulation	$V_{i\ min}$ to $V_{i\ max}$, 0 to 100% $I_{SB\ nom}$, $T_{a\ min}$ to $T_{a\ max}$		-3		+3	% V_{SBnom}
$P_{SB\ nom}$	Nominal Output Power	V_{SB} = 3.3 VDC,			16.5		W
		V_{SB} = 5.0 VDC,			16.5		
$I_{SB\ nom}$	Nominal Output Current	V_{SB} = 3.3 VDC,			5		ADC
		V_{SB} = 5.0 VDC,			3.3		
$V_{SB\ pp}$	Output Ripple Voltage	$V_{SB\ nom}$, $I_{SB\ nom}$, 20 MHz BW (See Section 5.1)				100	mVpp
dV_{SB}	Droop	0 - 100 % $I_{SB\ nom}$	VSB_SEL = 1		67		mV
			VSB_SEL = 0		44		
$I_{SB\ max}$	Current Limitation	VSB_SEL = 1,		5.25		6	ADC
		VSB_SEL = 0,		3.45		4.3	
dV_{SBdyn}	Dynamic Load Regulation	ΔI_{SB} = 50% $I_{SB\ nom}$, I_{SB} = 5 … 100% $I_{SB\ nom}$, dI_o/dt = 0.5 A/µs, recovery within 1% of $V_{1\ nom}$		-3		3	% V_{SBnom}
T_{rec}	Recovery Time					250	µs
$t_{AC\ VSB}$	Start-up Time from AC	V_{SB} = 90% $V_{SB\ nom}$				2	sec
$t_{VSB\ rise}$	Rise Time	V_{SB} = 10…90% $V_{SB\ nom}$		0.5		30	ms
C_{Load}	Capacitive Loading	T_{amb} = 25°C				10,000	µF

Downloaded from Arrow.com.

12 V_{SB} Standby Output						
$V_{SB\ nom}$	Nominal Output Voltage	0.5 · $I_{SB\ nom}$, T_{amb} = 25°C		12		VDC
$V_{SB\ set}$	Output Setpoint Accuracy		-1		+1	% $V_{SB\ nom}$
$dV_{SB\ tot}$	Total Regulation	$V_{1\ min}$ to $V_{1\ max}$, 0 to 100% $I_{SB\ nom}$, $T_{a\ min}$ to $T_{a\ max}$	-3		+3	% $V_{SB\ nom}$
$P_{SB\ nom}$	Nominal Output Power	V_{SB} = 12 VDC		36		W
$I_{SB\ nom}$	Nominal Output Current	V_{SB} = 12 VDC		3		A
$V_{SB\ pp}$	Output Ripple Voltage	$V_{SB\ nom}$, $I_{SB\ nom}$, 20 MHz BW (See Section 5.1)		60	120	mVpp
dV_{SB}	Droop	0 - 100 % $I_{SB\ nom}$		270		mV
dV_{SBdyn}	Dynamic Load Regulation	ΔI_{SB} = 50% $I_{SB\ nom}$, I_{SB} = 5 … 100% $I_{SB\ nom}$,	-0.6		0.6	*V*
T_{rec}	Recovery Time	dI_o/dt = 1 A/µs, recovery within 1% of $V_{1\ nom}$			0.5	ms
$t_{AC\ VSB}$	Start-up Time from AC	V_{SB} = 90% $V_{SB\ nom}$			2	s
$t_{VSB\ rise}$	Rise Time	V_{SB} = 10…90% $V_{SB\ nom}$			20	ms
C_{Load}	Capacitive Loading	T_{amb} = 25°C			1,500	µF

5.1 OUTPUT VOLTAGE RIPPLE

Internal capacitance at the 12 V output (behind the OR-ing circuitry) is minimized to prevent disturbances during hot plug. In order to provide low output ripple voltage in the application, external capacitors (a parallel combination of 10 µF tantalum capacitor in parallel with 0.1 µF ceramic capacitors) should be added close to the power supply output.
The setup of *Figure 5* has been used to evaluate suitable capacitor types. The capacitor combinations of *Table 1* and ***Table 2*** should be used to reduce the output ripple voltage. The ripple voltage is measured with 20 MHz BWL, close to the external capacitors.

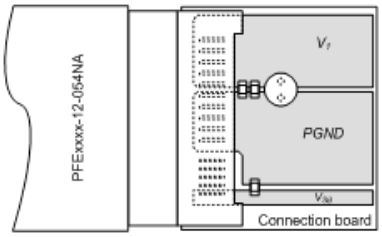


Figure 5. Output ripple test setup

NOTE: Care must be taken when using ceramic capacitors with a total capacitance of 1 µF to 50 µF on output V1, due to their high quality factor the output ripple voltage may be increased in certain frequency ranges due to resonance effects.

EXTERNAL CAPACITOR V1	DV1MAX	UNIT
Standard test condition: 1 Pc 10 µF / 63 V Electrolytic Capacitor 1 pc 0.1 uF / 100 V ceramic capacitor	150	mVpp
1Pcs 1000µF/16V/Low ESR Aluminum/ø10x20	120	mVpp
2Pcs 47µF/16V/X5R/1210	100	mVpp
2Pcs 47µF/16V/X5R/1210 plus 1Pcs 1000µF Low ESR AlCap	90	mVpp

Table 1. Suitable capacitors for V_1

EXTERNAL CAPACITOR VSB	DV1MAX	UNIT
Standard test condition: 1 pc 10 µF / 63 V Electrolytic Capacitor 1 pc 0.1 uF / 100 V ceramic capacitor	100	mVpp
Add 1 pc 10µF/16 V/X5R/1206	50	mVpp
Add 2 pcs 10µF/1V/X5R/1206	40	mVpp

Table 2. Suitable capacitors for 3.3V_{SB} and 5V_{SB}

The output ripple voltage on V_{SB} is influenced by the main output V_1. Evaluating V_{SB} output ripple must be done when maximum load is applied to V_1.

© 2024 Bel Fuse Inc.

Downloaded from Arrow.com.

6. PROTECTION SPECIFICATIONS

PARAMETER		DESCRIPTION / CONDITION	MIN	NOM	MAX	UNIT
F	Input Fuse (L)	Not user accessible, quick-acting (F)		16		A
$V_{1\ OV}$	OV Threshold V_1		13.3		14.5	VDC
$t_{OV\ V1}$	OV Latch Off Time V_1				1	ms
$V_{SB\ OV}$	OV Threshold V_{SB}		110		120	% V_{SB}
$t_{OV\ VSB}$	OV Latch Off Time V_{SB}				1	ms
$I_{V1\ lim}$	Over Current Limitation V_1	V_i > 180 VAC, T_a < 45°C V_i > 90 VAC, T_a < 45°C	128 93		140 110	A
$I_{VSB\ lim}$	Over Current Limitation V_{SB}	T_a < 45°C for 12 V_{SB}	3.3		3.6	A
		T_a < 45°C for 5 V_{SB}	3.45		4.5	A
		T_a < 45°C for 3.3 V_{SB}	5.25		6.2	A
$t_{V1\ SC}$	Short Circuit Regulation Time	V_1 < 3 V, time until I_{V1} is limited to < *200A*			2	ms
T_{SD}	Over Temperature on Heat Sinks	Automatic shut-down		115	120	°C

6.1 OVERVOLTAGE PROTECTION

The PFE front-ends provide a fixed threshold overvoltage (OV) protection implemented with a HW comparator. Once an OV condition has been triggered, the supply will shut down and latch the fault condition. The latch can be unlocked by disconnecting the supply from the AC mains or by toggling the PSON_L input.

6.2 VSB UNDERVOLTAGE DETECTION

Both main and standby outputs are monitored.

3.3 / 5 V_{SB}

LED and PWOK_H pin signal if the output voltage exceeds ±5% of its nominal voltage. Output under voltage protection is provided on the standby output only. When V_{SB} falls below 75% of its nominal voltage, the main output V_1 is inhibited.

12 V_{SB}

LED and PWOK_L pin signal if the output voltage exceeds ±7% of its nominal voltage. Output under voltage protection is provided on both outputs. When either V_1 or V_{SB} falls below 93% of its nominal voltage, the output is inhibited.

6.3 CURRENT LIMITATION

6.3.1 MAIN OUTPUT

When main output runs in current limitation mode its output will turn OFF below 2 V but will retry to recover every 1 s interval. If current limitation mode is still present after the unit retry, output will continuously perform this routine until current is below the current limitation point. The supply will go through soft start every time it retries from current limitation mode.

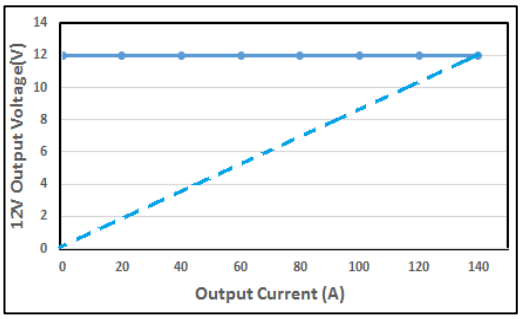


Figure 6. Current Limitation on V_1 (V_i = 230 VAC)

Downloaded from Arrow.com.

The output power derating of V1 refers to Figure 7. The main output at high line will decrease if the ambient (inlet) temperature increases beyond 45°C, and low line will decrease if the ambient (inlet) temperature increases beyond 40°C.

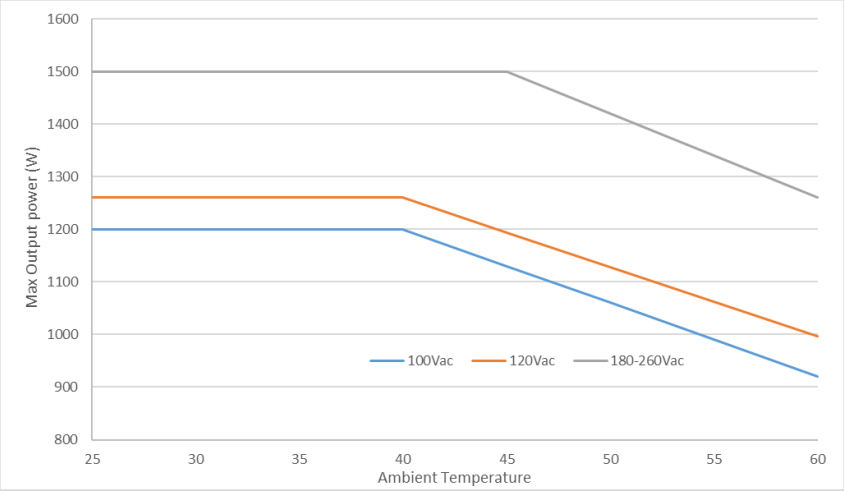


Figure 7. Power derating curve with Vin and Ambient Temperature

Note:
1. The application of power supply should also refer to installation instructions document.
2. The power supply has no limitation on its output current/power in the respect of meeting the operating conditions shown by the derating limits shown above. It is the responsibility of the end user to ensure operating conditions are maintained within their safety agency certification limits to assure safe and reliable operation.

6.3.2 STANDBY OUTPUT

3.3 / 5 V_{SB}

The standby output exhibits a substantially rectangular output characteristic down to 0 V (no hiccup mode / latch off). If it runs in current limitation and its output voltage drops below the UV threshold, then the main output will be inhibited (standby remains on). The current limitation of the standby output is independent of the AC input voltage.

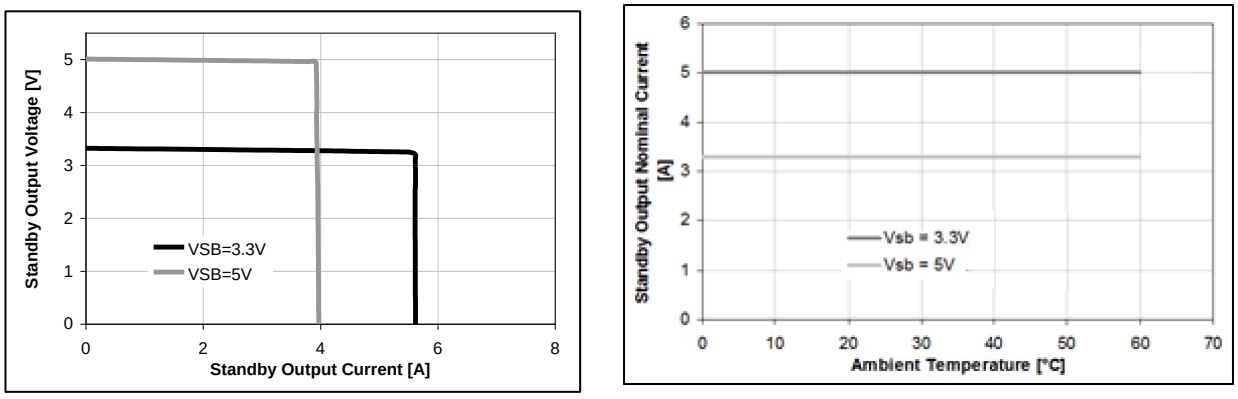


Figure 8. Current Limitation and Temperature Derating on 3.3 / 5 V_{SB}

© 2024 Bel Fuse Inc.

Downloaded from Arrow.com.

12 V_{SB}

On the standby output, a hiccup type over current protection is implemented. This protection will shut down the standby output immediately when standby current reaches or exceeds $I_{SB\ lim}$. After an off-time of 1 s the output automatically tries to restart. If the overload condition is removed the output voltage will reach again its nominal value. At continuous overload condition the output will repeatedly trying to restart with 1s intervals. A failure on the Standby output will shut down both Main and Standby outputs.

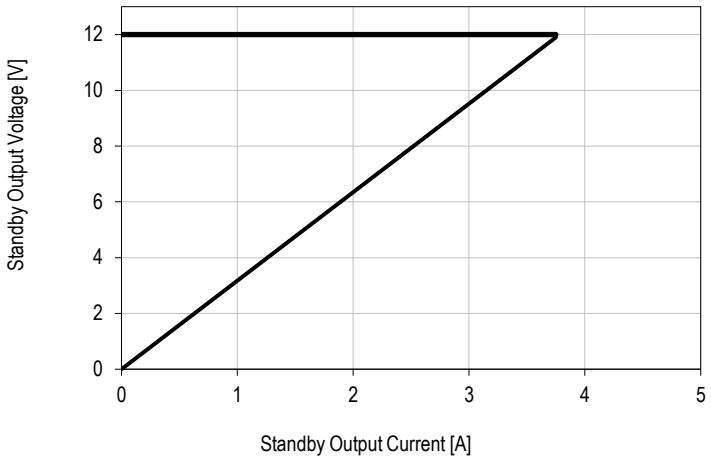


Figure 9. Current Limitation on 12 V_{SB}

7. MONITORING

PARAMETER	DESCRIPTION / CONDITION			MIN	NOM	MAX	UNIT
$V_{I\ mon}$	Input RMS Voltage	$V_{I\ min} \le V_I \le V_{I\ max}$		-2.5		+2.5	%
$I_{I\ mon}$	Input RMS Current	$I_I > 2\ A_{rms}$		-5		+5	%
$P_{I\ mon}$	True Input Power	$I_I > 2\ A_{rms}$		-5		+5	%
$V_{1\ mon}$	V_1 Voltage			-2		+2	%
$I_{1\ mon}$	V_1 Current	I1 > 25 A		-2		+2	%
		I1 ≤ 25 A		-1		+1	A
$P_{o\ nom}$	Total Output Power	Po > 120 W		-5		+5	%
		Po ≤ 120 W		-12		+12	W
$V_{SB\ mon}$	Standby Voltage		3.3 / 5 V_{SB} Models 12 V_{SB} Models	-0.2 -0.5		+0.2 +0.5	V
$I_{SB\ mon}$	Standby Current	$I_{SB} \le I_{SB\ nom}$	3.3 / 5 V_{SB} Models 12 V_{SB} Models	-0.5 -0.5		+0.5 +0.5	A

Downloaded from Arrow.com.

8. SIGNAL & CONTROL SPECIFICATIONS

8.1 ELECTRICAL CHARACTERISTICS

PARAMETER	DESCRIPTION / CONDITION		MIN	NOM	MAX	UNIT
PSKILL_H / PSON_L / VSB_SEL / HOTSTANDBYEN_H Inputs						
V_{IL}	Input Low Level Voltage		-0.2		0.8	V
V_{IH}	Input High Level Voltage		2.4		3.5	V
$I_{IL, H}$	Maximum Input Sink or Source Current		0		1	mA
$R_{puPSKILL_H}$	Internal Pull Up Resistor on PSKILL_H			100		kΩ
R_{puPSON_L}	Internal Pull Up Resistor on PSON_L			10		kΩ
R_{puVSB_SEL}	Internal Pull Up Resistor on VSB_SEL			10		kΩ
$R_{puHOTSTANDBYEN_H}$	Internal Pull Up Resistor on HOTSTANDBYEN_H			10		kΩ
R_{LOW}	Resistance Pin to SGND for Low Level		0		1	kΩ
R_{HIGH}	Resistance Pin to SGND for High Level		50			kΩ
PWOK_H Output						
V_{OL}	Output Low Level Voltage	I_{sink} < 4 mA	0		0.4	V
V_{OH}	Output High Level Voltage	I_{source} < 0.5 mA	2.6		3.5	V
R_{puPWOK_H}	Internal Pull Up Resistor on PWOK_H			1		kΩ
ACOK_H Output						
V_{OL}	Output Low Level Voltage	I_{sink} < 2 mA	0		0.4	V
V_{OH}	Output High Level Voltage	I_{source} < 50 µA	2.6		3.5	V
R_{puACOK_H}	Internal Pull Up Resistor on ACOK_H			10		kΩ
SMB_ALERT_L Output						
V_{ext}	Maximum External Pull Up Voltage				12	V
V_{OL}	Output Low Level Voltage	I_{source} < 4 mA	0		0.4	V
I_{OH}	Maximum High Level Leakage Current				10	µA
$R_{puSMB_ALERT_L}$	Internal Pull Up Resistor on SMB_ALERT_L			None		kΩ

8.2 INTERFACING WITH SIGNALS

All signal pins have protection diodes implemented to protect internal circuits. When the power supply is not powered, the protection devices start clamping at signal pin voltages exceeding ±0.5 V. Therefore, all input signals should be driven only by an open collector/drain to prevent back feeding inputs when the power supply is switched off. If interconnecting of signal pins of several power supplies is required, then this should be done by decoupling with small signal schottky diodes as shown in examples in (*Figure*) except for SMB_ALERT_L, ISHARE and I²C pins. SMB_ALERT_L pins can be interconnected without decoupling diodes, since these pins have no internal pull up resistor and use a 15 V zener diode as protection device against positive voltage on pins. ISHARE pins must be interconnected without any additional components. This in-/output is disconnected from internal circuits when the power supply is switched off.

© 2024 Bel Fuse Inc.

Downloaded from Arrow.com.

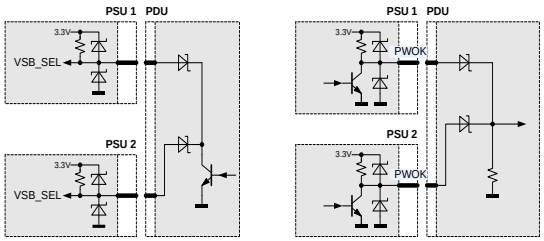


Figure 10. Interconnection of Signal Pins

8.3 FRONT LEDS

There will be 2 separate LED indicators, one green and one amber to indicate the power supply status. There will be a (slow) blinking green POWER LED (OK) to indicate that AC is applied to the PSU and the Standby Voltage is available. This same LED shall go steady to indicate that all the Power Outputs are available. This same LED or separate one will blink (slow) or be solid ON amber to indicate that the power supply has failed or reached a warning status and therefore a replacement of the unit is/maybe necessary. The LED are visible on the power supply's exterior face. The LED location meets ESD Requirements.

POWER SUPPLY CONDITION	GREEN (OK) LED STATUS	AMBER (FAIL) LED STATUS
No AC power to all power supplies	OFF	OFF
Power Supply Failure (includes over voltage, over current, over temperature and fan failure)	OFF	ON
Power Supply Warning events where the power supply continues to operate (high temperature, high power and slow fan)	OFF	Blinking
AC Present/ 12VSB on (PSU OFF)	Blinking	OFF
Power Supply ON and OK	ON	OFF

Table 3. LED Status

8.4 PRESENT_L

This signaling pin is recessed within the connector and will contact only once all other connector contacts are closed. This active-low pin is used to indicate to a power distribution unit controller that a supply is plugged in. The maximum current on PRESENT_L pin should not exceed 10 mA.




Figure 11. PRESENT_L signal pin

8.5 PSKILL_H INPUT

The PSKILL_H input is active-high and is located on a recessed pin on the connector and is used to disconnect the main output as soon as the power supply is being plugged out. This pin should be connected to SGND in the power distribution unit. The standby output will remain on regardless of the PSKILL_H input state.

Downloaded from Arrow.com.

8.6 AC TURN-ON / DROP-OUTS / ACOK_H

The power supply will automatically turn-on when connected to the AC line under the condition that the PSON_L signal is pulled low and the AC line is within range. The ACOK_H signal is active-high. The timing diagram is shown in ***Figure*** and referenced in *Table 4.*

OPERATING CONDITION		MIN	MAX	UNIT
$t_{AC\ VSB}$	AC Line to 90% V_{VSB}		2	sec
$t_{AC\ V1}$	AC Line to 90% V_1		2	sec
$t_{ACOK_H\ on1}$	ACOK_H signal on delay (start-up)		2000	ms
$t_{ACOK_H\ on2}$	ACOK_H signal on delay (dips)		100	ms
$t_{ACOK_H\ off}$	ACOK_H signal off delay		5	ms
$t_{VSB\ V1\ del}$	V_{SB} to V_1 delay	10	500	ms
$t_{V1\ holdup}$	Effective V_1 holdup time	10		ms
$t_{VSB\ holdup}$	Effective V_{SB} holdup time	20		ms
$t_{ACOK_H\ V1}$	ACOK_H to V_1 holdup	7		ms
$t_{ACOK_H\ VSB}$	ACOK_H to V_{SB} holdup	15		ms
$t_{V1\ off}$	Minimum V_1 off time	1	2	sec
$t_{VSB\ off}$	Minimum V_{SB} off time	1	2	sec

NOTE: AC short dips means below 10 ms;
AC long dips means 10 ms to 100 ms

Table 4. AC Turn-on / Dip Timing

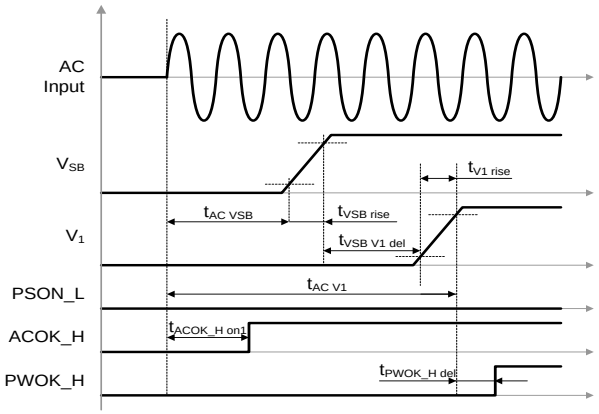


Figure 12. AC turn-on timing

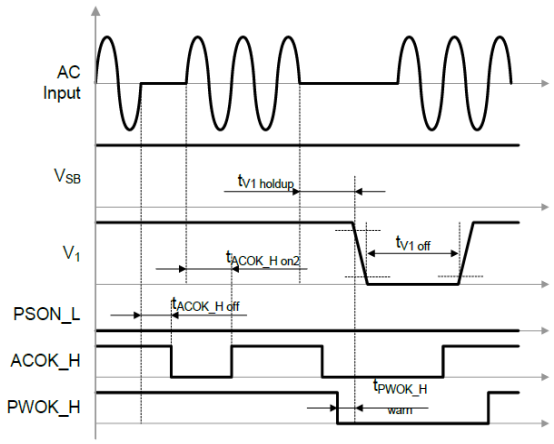


Figure 13. AC short dips

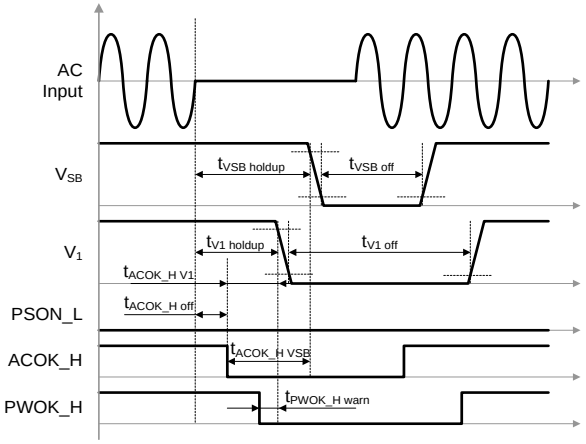


Figure 14. AC long dips

8.7 PSON_L INPUT

The PSON_L is an internally pulled-up (3.3 V) input signal to enable/disable the main output V1 of the front-end. This active-low pin is also used to clear any latched fault condition. The timing diagram is given in *Figure 13* and the parameters in *Table 5.*

OPERATING CONDITION		MIN	MAX	UNIT
$t_{PSON_L\ V1on}$	PSON_L to V_1 delay (on)	2	20	ms
$t_{PSON_L\ V1off}$	PSON_L to V_1 delay (off)	2	20	ms
$t_{PSON_L\ H\ min}$	PSON_L minimum High time	10		ms

Table 5. PSON_L timing

© 2024 Bel Fuse Inc.

Downloaded from Arrow.com.

8.8 PWOK_H SIGNAL

The PWOK_H is an open drain output with an internal pull-up to 3.3 V indicating whether both V_{SB} and V_1 outputs are within regulation. This pin is active-low. The timing diagram is shown in *Figure* and referenced in the ***Table 6***.

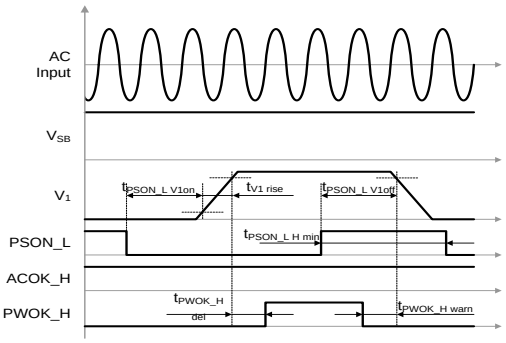


Figure 15. PSON_L and PWOK_H turn-on/off timing

OPERATING CONDITION		MIN	MAX	UNIT
$t_{PWOK_H\ del}$	PWOK_H to V_1 delay (on)	100	500	ms
$t_{PWOK_H\ warn}$*	PWOK_H to V_1 delay (off) caused by:			
	PSKILL_H	0	1	ms
	PSON_L, OT, Fan Failure	0.5	2.5	ms
	ACOK_H (time change with loading condition)	0.5	100	ms
	UV and OV on VSB	1	30	ms
	OC on V1 (Software trigger)	-11	0	ms
	OC on V1 (Hardware trigger)	-1	0	ms
	OV on V1	-3	0	ms

* A positive value means a warning time, a negative value a delay (after fact).

Table 6. PWOK_H timing

8.9 CURRENT SHARE

The PFE front-ends have an active current share scheme implemented for V_1. All the ISHARE current share pins need to be interconnected in order to activate the sharing function. If a supply has an internal fault or is not turned on, it will disconnect its ISHARE pin from the share bus. This will prevent dragging the output down (or up) in such cases.

The current share function uses a digital bi-directional data exchange on a recessive bus configuration to transmit and receive current share information. The controller implements a Master/Slave current share function. The power supply providing the largest current among the group is automatically the Master. The other supplies will operate as Slaves and increase their output current to a value close to the Master by slightly increasing their output voltage. The voltage increase is limited to +250 mV.

The standby output uses a passive current share method (droop output voltage characteristic).

8.10 SENSE INPUTS

Both main and standby outputs have sense lines implemented to compensate for voltage drop on load wires (no sense lines for 12VSB). The maximum allowed voltage drop is 200 mV on the positive rail and 100 mV on the PGND rail.

With open sense inputs the main output voltage will rise by 270 mV and the standby output by 50 mV. Therefore, if not used, these inputs should be connected to the power output and PGND close to the power supply connector. The sense inputs are protected against short circuit. In this case the power supply will shut down.

8.11 HOT-STANDBY OPERATION

The hot-standby operation is an operating mode allowing to further increase efficiency at light load conditions in a redundant power supply system. Under specific conditions one of the power supplies is allowed to disable its DC/DC stage. This will save the power losses associated with this power supply and at the same time the other power supply will operate in a load range having a better efficiency. In order to enable the hot standby operation, the HOTSTANDBYEN_H and the ISHARE pins need to be interconnected. A power supply will only be allowed to enter the hot-standby mode, when the HOTSTANDBYEN_H pin is high, the load current is low (see *Figure 7*) and the supply was allowed to enter the hot-standby mode by the system controller via the appropriate I²C command (by default disabled). The system controller needs to ensure that only one of the power supplies is allowed to enter the hot-standby mode.

If a power supply is in a fault condition, it will pull low its active-high HOTSTANDBYEN_H pin which indicates to the other power supply that it is not allowed to enter the hot-standby mode or that it needs to return to normal operation should it already have been in the hot-standby mode.

NOTE: The system controller needs to ensure that only one of the power supplies is allowed to enter the hot-standby model.

Downloaded from Arrow.com.

Figure 8 shows the achievable power loss savings when using the hot-standby mode operation. A total power loss reduction of 5 W is achievable.

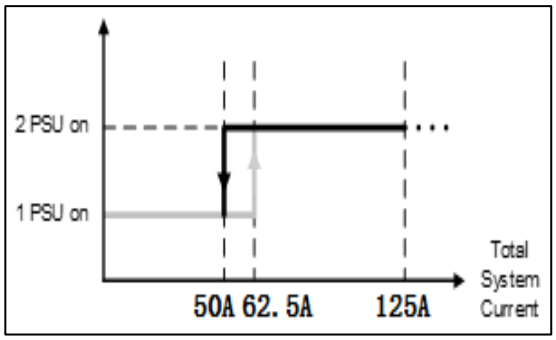


Figure 7. Hot-standby enable/disable current thresholds

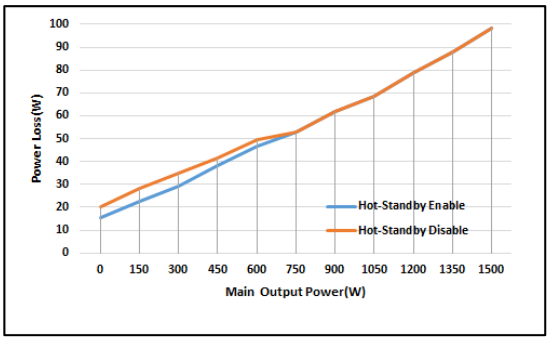


Figure 8. PSU power losses with/without hot-standby mode

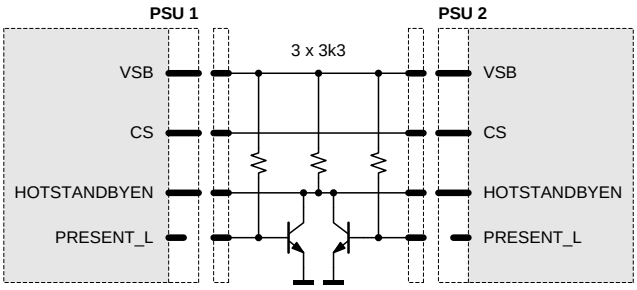


Figure 9. Recommended hot-standby configuration

In order to prevent voltage dips when the active power supply is unplugged while the other is in hot-standby mode, it is strongly recommended to add the external circuit as shown in *Figure 9.* If the PRESENT_L pin status needs also to be read by the system controller, it is recommended to exchange the bipolar transistors with small signal MOS transistors or with digital transistors.

8.12 I²C / SMBUS COMMUNICATION

The interface driver in the PFE supply is referenced to the V1 Return. The PFE supply is a communication Slave device only; it never initiates messages on the I2C/SMBus by itself. The communication bus voltage and timing is defined in ***Table 7*** further characterized through:

- There are no internal pull-up resistors
- The SDA/SCL IOs are 3.3/5 V tolerant
- Full SMBus clock speed of 100 kbps
- Clock stretching limited to 1 ms
- SCL low time-out of >25 ms with recovery within 10 ms
- Recognizes any time Start/Stop bus conditions

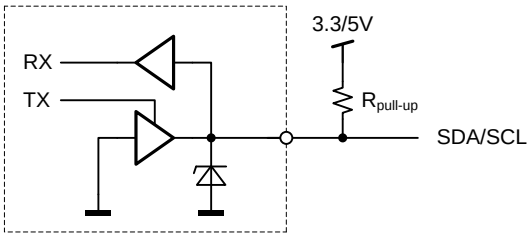


Figure 10. Physical layer of communication interface

© 2024 Bel Fuse Inc.

Downloaded from Arrow.com.

The SMB_ALERT_L signal indicates that the power supply is experiencing a problem that the system agent should investigate. This is a logical OR of the Shutdown and Warning events. The power supply responds to a read command on the general SMB_ALERT_L call address 25(0x19) by sending its status register.

Communication to the DSP or the EEPROM will be possible as long as the input AC voltage is provided. If no AC is present, communication to the unit is possible as long as it is connected to a life V1 output (provided e.g. by the redundant unit). If only VSB is provided, communication is not possible.

PARAMETER	DESCRIPTION / CONDITION		MIN	NOM	MAX	UNIT
V_{iL}	Input low voltage		-0.5		1.0	V
V_{iH}	Input high voltage		2.3		5.5	V
V_{hys}	Input hysteresis		0.15			V
V_{oL}	Output low voltage	3 mA sink current	0		0.4	V
t_r	Rise time for SDA and SCL (ViLmax-0.15V to ViHmin+0.15V)	0.65V to 2.25V f_{SCL} ≤ 100 kHz	20+0.1Cb[3]		1000	ns
t_{of}	Output fall time (ViHmin+0.15V to ViLmax-0.15V)	2.25V to 0.65V f_{SCL} ≤ 100 kHz	20+0.1Cb[3]		300	ns
I_i	Input current SCL/SDA	0.1 VDD < Vi < 0.9 VDD	-10		10	µA
C_i	Internal Capacitance for each SCL/SDA				50	pF
f_{SCL}	SCL clock frequency		0		100	kHz
R_{pu}	External pull-up resistor	f_{SCL} ≤ 100 kHz			1000 ns / Cb	Ω
t_{HDSTA}	Hold time (repeated) START	f_{SCL} ≤ 100 kHz	4.0			µs
t_{LOW}	Low period of the SCL clock	f_{SCL} ≤ 100 kHz	4.7			µs
t_{HIGH}	High period of the SCL clock	f_{SCL} ≤ 100 kHz	4.0			µs
t_{SUSTA}	Setup time for a repeated START	f_{SCL} ≤ 100 kHz	4.7			µs
t_{HDDAT}	Data hold time	f_{SCL} ≤ 100 kHz	0		3.45	µs
t_{SUDAT}	Data setup time	f_{SCL} ≤ 100 kHz	250			ns
t_{SUSTO}	Setup time for STOP condition	f_{SCL} ≤ 100 kHz	4.0			µs
t_{BUF}	Bus free time between STOP and START	f_{SCL} ≤ 100 kHz	5			ms

Table 7. I2C / SMBus Specification

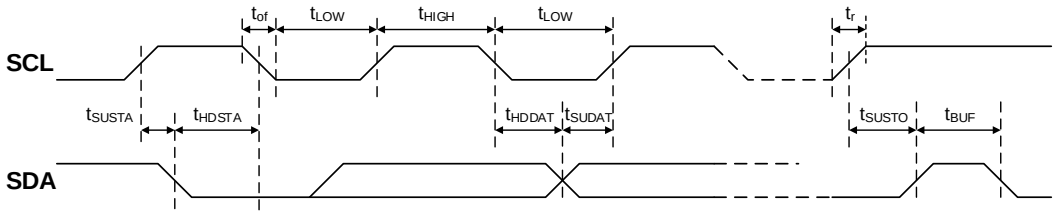


Figure 20. I2C / SMBus Timing

[3] Cb = Capacitance of bus line in pF, typically in the range of 10…400 pF

Downloaded from Arrow.com.

8.13 ADDRESS / PROTOCOL SELECTION (APS)

The APS pin provides the possibility to select the address by connecting a resistor to V1 return (0 V). A fixed addressing offset exists between the Controller and the EEPROM.

NOTE:

- If the APS pin is left open, the supply will operate with the Power Management Bus protocol at controller / EEPROM addresses 0xB6 / 0xA6.
- The APS pin is only read at start-up of the power supply. Therefore, it is not possible to change address dynamically.

R_{APS} (Ω) [4]	Protocol	I2C Address [5]	
		Controller	EEPROM
820	Power Management Bus	0xB0	0xA0
2700		0xB2	0xA2
5600		0xB4	0xA4
8200		0xB6	0xA6
15000	PSMI	0xB0	0xA0
27000		0xB2	0xA2
56000		0xB4	0xA4
180000		0xB6	0xA6

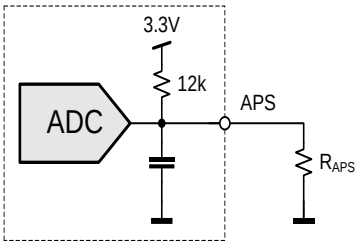


Figure 21. I2C address and protocol setting

8.14 CONTROLER AND EEPROM ACCESS

The controller and the EEPROM in the power supply share the same I2C bus physical layer (see *Figure 11*). An I2C driver device assures logic level shifting (3.3/5 V) and a glitch-free clock stretching. The driver also pulls the SDA/SCL line to nearly 0 V when driven low by the DSP or the EEPROM providing maximum flexibility when additional external bus repeaters are needed. Such repeaters usually encode the low state with different voltage levels depending on the transmission direction.

The DSP will automatically set the I2C address of the EEPROM with the necessary offset when its own address is changed / set. In order to write to the EEPROM, first the write protection needs to be disabled by sending the appropriate command to the DSP. By default, the write protection is on.

The EEPROM provides 256 bytes of user memory. None of the bytes are used for the operation of the power supply.

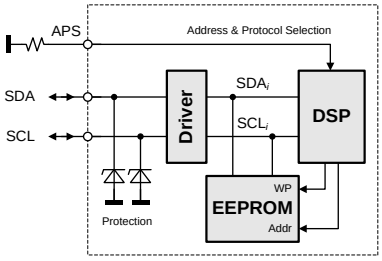


Figure 11. I2C Bus to DPS and EEPROM

4 E12 resistor values, use max 5% resistors, see also Figure 21

5 The LSB of the address byte is the R/W bit

© 2024 Bel Fuse Inc.

Downloaded from Arrow.com.

8.15 EEPROM PROTOCOL

The EEPROM follows the industry communication protocols used for this type of device. Even though page write / read commands are defined, it is recommended to use the single byte write / read commands.


WRITE

The write command follows the SMBus 1.1 Write Byte protocol. After the device address with the write bit cleared a first byte with the data address to write to is sent followed by the data byte and the STOP condition. A new START condition on the bus should only occur after 5ms of the last STOP condition to allow the EEPROM to write the data into its memory.



READ

The read command follows the SMBus 1.1 Read Byte protocol. After the device address with the write bit cleared the data address byte is sent followed by a repeated start, the device address and the read bit set. The EEPROM will respond with the data byte at the specified location.



8.16 POWER MANAGEMENT BUS PROTOCOL


The Power Management Bus is an open standard protocol that defines means of communicating with power conversion and other devices. For more information, please see the System Management Interface Forum web site at www.powerSIG.org.

Power Management Bus command codes are not register addresses. They describe a specific command to be executed. The PFE1500 supply supports the following basic command structures:

- Clock stretching limited to 1 ms
- SCL low time-out of >25 ms with recovery within 10 ms
- Recognized any time Start/Stop bus conditions


WRITE

The write protocol is the SMBus 1.1 Write Byte/Word protocol. Note that the write protocol may end after the command byte or after the first data byte (Byte command) or then after sending 2 data bytes (Word command).

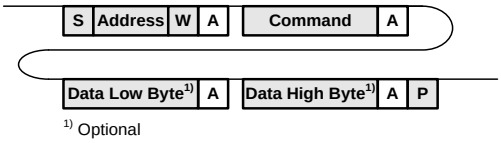


1) Optional

In addition, Block write commands are supported with a total maximum length of 255 bytes. See PFE Programming Manual for further information.




READ

The read protocol is the SMBus 1.1 Read Byte/Word protocol. Note that the read protocol may request a single byte or word.



In addition, Block read commands are supported with a total maximum length of 255 bytes. See PFE Programming Manual BCA.00006 for further information.



Downloaded from Arrow.com.


8.17 PSMI PROTOCOL

New power management features in computer systems require the system to communicate with the power supply to access current, voltage, fan speed, and temperature information. Current measurements provide data to the system for determining potential system configuration limitations and provide actual system power consumption for facility planning. Temperature and fan monitoring allow the system to better manage fan speeds and temperatures for optimizing system acoustics. Voltage monitoring allows the system to calculate input wattage and warning of system voltage regulation problems. The Power Supply Management Interface (PSMI) supports diagnostic capabilities and allows managing of redundant power supplies. The communication method is SMBus. The current design guideline is version 2.12.

The communication protocol is register based and defines a read and write communication protocol to read / write to a single register address. All registers are accessed via the same basic command given below. No PEC (Packet Error Code) is used.


WRITE

The write protocol used is the SMBus 2.0 Write Word protocol. All writes are 16-bit words; byte reads are not supported nor allowed. The shaded areas in the figure indicate bits and bytes written by the PSMI master device. See PFE Programming Manual for further information.



READ

The read protocol used is the SMBus 2.0 Read Word protocol. All reads are 16-bit words; byte reads are not supported nor allowed. The shaded areas in the figure indicate bits and bytes written by the PSMI master device. See PFE Programming Manual for further information.



8.18 GRAPHICAL USER INTERFACE

Bel Power Solutions provides with its “Bel Power Solutions I2C Utility” a Windows® XP/Vista/Win7 compatible graphical user interface allowing the programming and monitoring of the PFE1500-12-054 Front-End. The utility can be downloaded on: belfuse.com/power-solutions and supports Power Management Bus protocols.

The GUI allows automatic discovery of the units connected to the communication bus and will show them in the navigation tree. In the monitoring view the power supply can be controlled and monitored.

If the GUI is used in conjunction with the SNP-OP-BOARD-01 or YTM.G1Q01.0 Evaluation Kit it is also possible to control the PSON_L pin(s) of the power supply.

Further there is a button to disable the internal fan for approximately 10 seconds. This allows the user to take input power measurements without fan consumptions to check efficiency compliance to the Climate Saver Computing Platinum specification.

The monitoring screen also allows to enable the hot-standby mode on the power supply. The mode status is monitored and by changing the load current it can be monitored when the power supply is being disabled for further energy savings. This obviously requires 2 power supplies being operated as a redundant system (as in the evaluation kit).

NOTE: The user of the GUI needs to ensure that only one of the power supplies have the hot-standby mode enabled.

© 2024 Bel Fuse Inc.

Downloaded from Arrow.com.

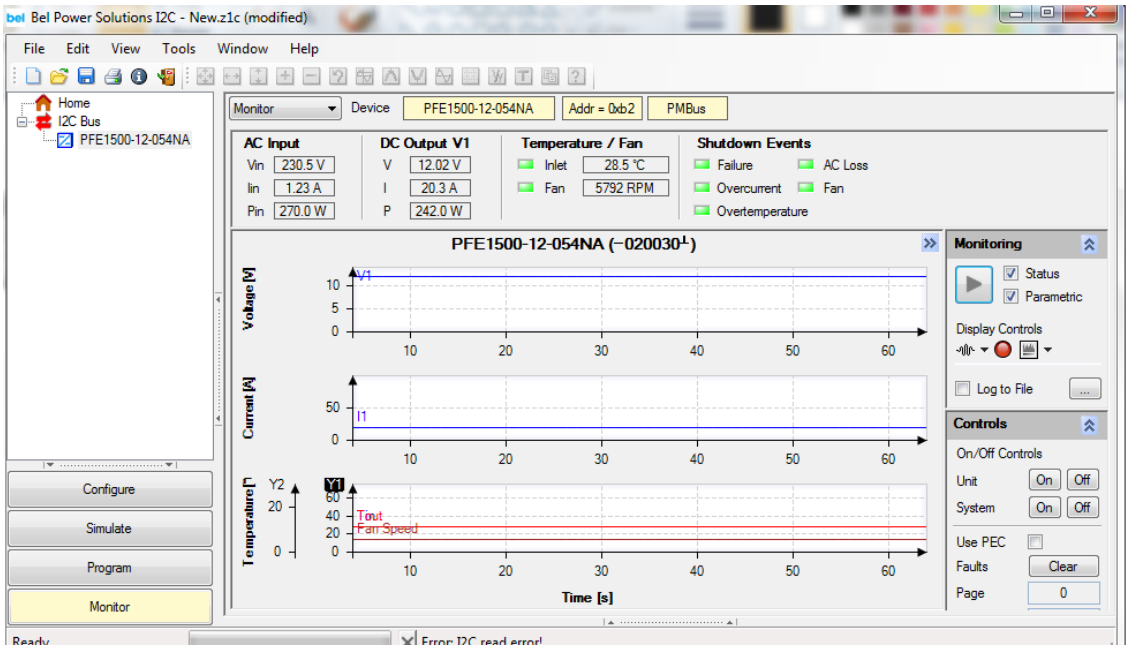


Figure 12. Monitoring dialog of the I2C Utility

9. TEMPERATURE AND FAN CONTROL

To achieve best cooling results sufficient airflow through the supply must be ensured. Do not block or obstruct the airflow at the rear of the supply by placing large objects directly at the output connector. The PFE1500-12-054NA, PFE1500-12-054NAC, PFE1500-12-054NAH and PFE1500-12NA/NAC/NAHS412 are provided with normal airflow, which means the air enters through the DC-output of the supply and leaves at the AC-inlet. The PFE1500-12-054RA, PFE1500-12-054RAC ,PFE1500-12-054RAH and PFE1500-12RAS412 are provided with reversed airflow, which means the air enters through the AC-inlet of the supply and leaves at the DC-output. Power supplies have been designed for horizontal operation.

The fan inside of the supply is controlled by a microprocessor. The RPM of the fan is adjusted to ensure optimal supply cooling and is a function of output power and the inlet temperature.

For the normal airflow version additional constraints apply because of the AC-connector. In a normal airflow unit, the hot air is exiting the power supply unit at the AC-inlet. **NOTE:** It is the responsibility of the end user to check the front temperature in such cases and derate the input power if needed to meet the mating connector temperature rating. The unit is not limiting its power automatically to meet such a temperature limitation.

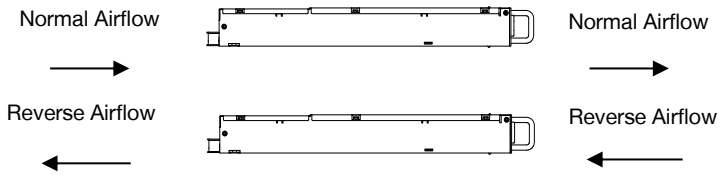


*Figure **24**. Airflow direction*

Downloaded from Arrow.com.

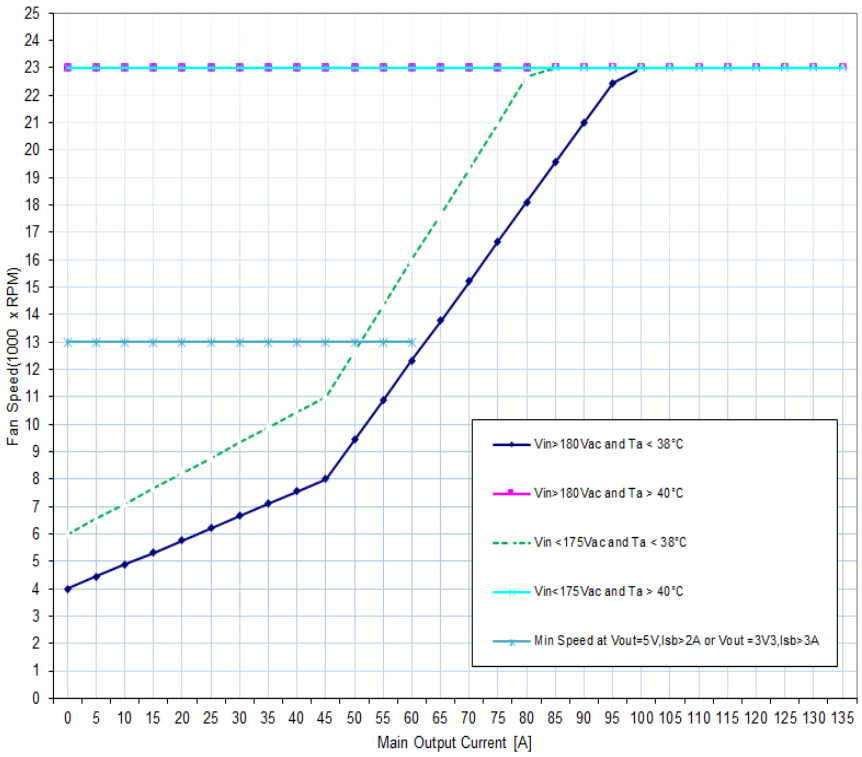


Figure 13. Fan speed vs. main output load

10. ELECTROMAGNETIC COMPATIBILITY

10.1 IMMUNITY

NOTE: Most of the immunity requirements are derived from EN 55024:1998/A2:2003.

PARAMETER	DESCRIPTION / CONDITION	CRITERION
ESD Contact Discharge	IEC / EN 61000-4-2, ±8 kV, 25+25 discharges per test point (metallic case, LEDs, connector body)	A
ESD Air Discharge	IEC / EN 61000-4-2, ±15 kV, 25+25 discharges per test point (non-metallic user accessible surfaces)	A
Radiated Electromagnetic Field	IEC / EN 61000-4-3, 10 V/m, 1 kHz/80% Amplitude Modulation, 1 µs Pulse Modulation, 10 kHz…2 GHz	A
Burst	IEC / EN 61000-4-4, level 3 AC port ±2 kV, 1 minute DC port ±1 kV, 1 minute	A
Surge	IEC / EN 61000-4-5 Line to earth: level 3, ±2 kV Line to line: level 2, ±1 kV	A
RF Conducted Immunity	IEC/EN 61000-4-6, Level 3, 10 Vrms, CW, 0.1 … 80 MHz	A
Voltage Dips and Interruptions	IEC/EN 61000-4-11 1: Vi 230 V, 100% Load, Phase 0 °, Dip 100%, Duration 10 ms 2: Vi 230 V, 100% Load, Phase 0 °, Dip 100%, Duration 20 ms 3: Vi 230 V, 100% Load, Phase 0 °, Dip 100%, Duration >20 ms	A V_{SB}: A, V_1: B B

© 2024 Bel Fuse Inc.

Downloaded from Arrow.com.

10.2 EMISSION

PARAMETER	DESCRIPTION / CONDITION	CRITERION
Conducted Emission	EN55032 / CISPR 22: 0.15 … 30 MHz, QP and AVG, single unit	Class A
	EN55032 / CISPR 22: 0.15 … 30 MHz, QP and AVG, 2 units in rack system	Class A
Radiated Emission	EN55022 / CISPR 22: 30 MHz … 1 GHz, QP, single unit	Class A
	EN55022 / CISPR 22: 30 MHz … 1 GHz, QP, 2 units in rack system	Class A
Harmonic Emissions	IEC61000-3-2, Vin = 115 VAC / 60 Hz, & Vin = 230VAC/ 50 Hz, 100% Load	Class A
AC Flicker	IEC61000-3-3, Vin = 230 VAC / 60 Hz, 100% Load	Pass

11. SAFETY APPROVALS

Maximum electric strength testing is performed in the factory according to IEC/EN 62368-1, and UL 62368-1. Input-to-output electric strength tests should not be repeated in the field. Bel Power Solutions will not honor any warranty claims resulting from electric strength field tests.

PARAMETER		DESCRIPTION / CONDITION	MIN	NOM	MAX	UNIT
	Agency Approvals	Approved to latest edition of the following standards: UL/CSA 62368-1 and EN/IEC 62368-1		Approved by independent body (see CE Declaration)		
	Isolation Strength	Input (L/N) to case (PE)		Basic		
		Input (L/N) to output		Reinforced		
		Output to case (PE)		Functional		
d_C	Creepage / Clearance	Primary (L/N) to protective earth (PE)		According to safety standard		mm
		Primary to secondary				
	Electrical Strength Test	Input to case		2500		VDC
		Input to output		4000 (Vin ≤ 250 VAC)		VDC
				5000 (250 VAC < Vin ≤ 300 VAC)		VDC

12. ENVIRONMENTAL SPECIFICATIONS


PARAMETER		DESCRIPTION / CONDITION	MIN	NOM	MAX	UNIT
T_A	Ambient Temperature	$V_{i\,min}$ to $V_{i\,max}$, $I_{o\,nom}$, $I_{SB\,nom}$ below 5000 feet Altitude	0		+45	°C
		$V_{i\,min}$ to $V_{i\,max}$, $I_{o\,nom}$, $I_{SB\,nom}$ below 10,000 feet Altitude	0		+40	°C
T_{Aext}	Extended Temp. Range	Derating output	+46		+60	°C
T_S	Storage Temperature	Non-operational	-20		+70	°C
	Altitude	Operational, above Sea Level, refer derating to Ta	-		10,000	Feet
N_a	Audible Noise	$V_{i\,nom}$, 50% $I_{o\,nom}$, T_A = 25°C		60		dBA

13. MECHANICAL SPECIFICATIONS

PARAMETER		DESCRIPTION / CONDITION	MIN	NOM	MAX	UNIT
	Dimensions	Width		54.5		mm
		Height		40.0		
		Depth		321.5		
M	Weight			1.13		kg

Downloaded from Arrow.com.

PFE1500-12-054NAH, PFE1500-12-054RAH and PFE1500-12NAHS412: Input AC connector RongFeng RF-203-D-1.0

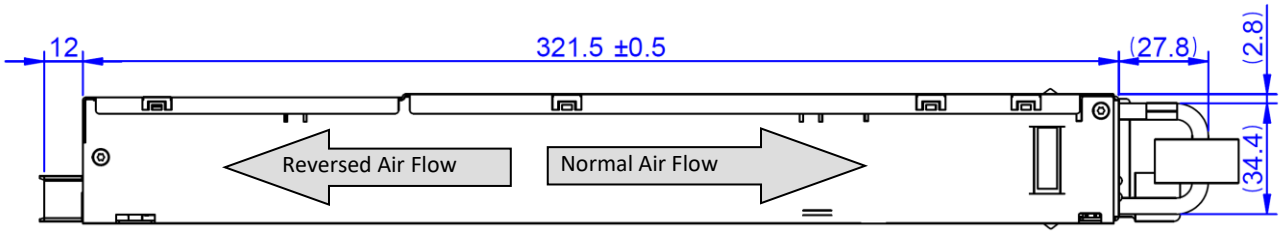

NOTE: A 3D step file of the power supply casing is available on request.

Figure 14 Side View 1

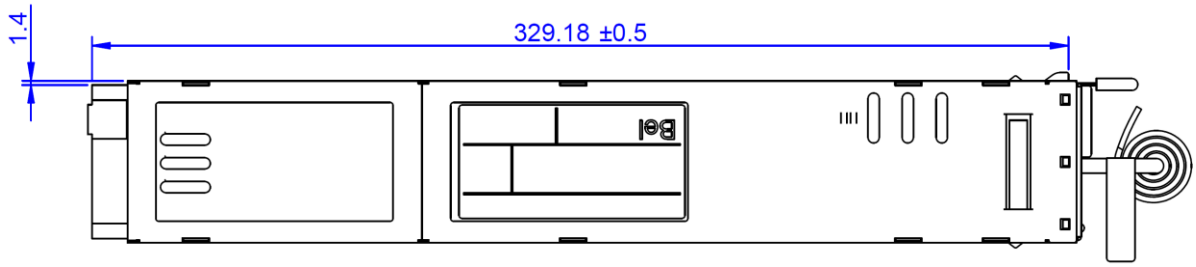


Figure 15. Top View

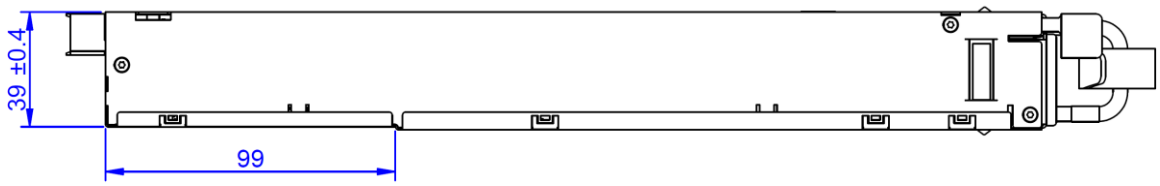


Figure 28. Side View 2


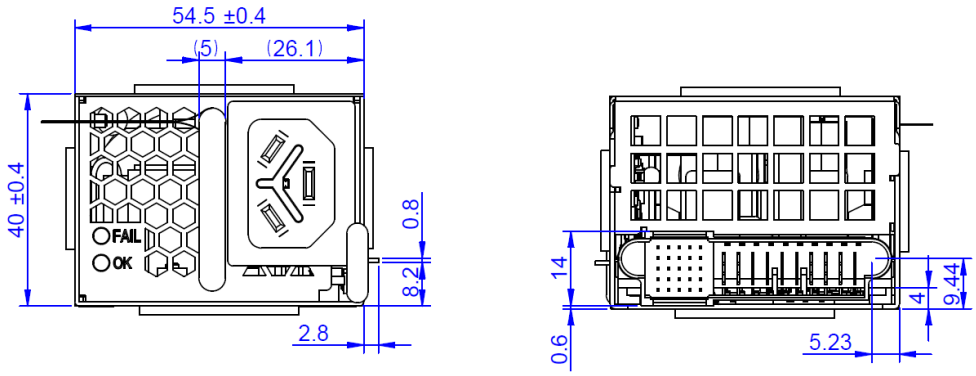


Figure 16. Front and Rear View

© 2024 Bel Fuse Inc.

Downloaded from Arrow.com.

PFE1500-12-054NA, PFE1500-12-054RA and PFE1500-12NA/RAS412: C14 type Input AC connector RongFeng SS-120-1.0B-2.8BV or equivalent

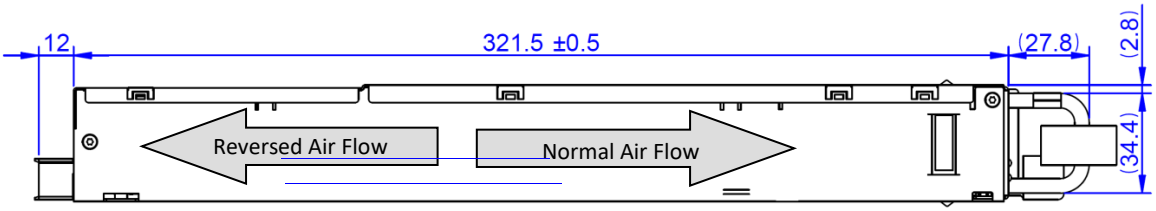

NOTE: A 3D step file of the power supply casing is available on request.

Figure 30. Side View 1

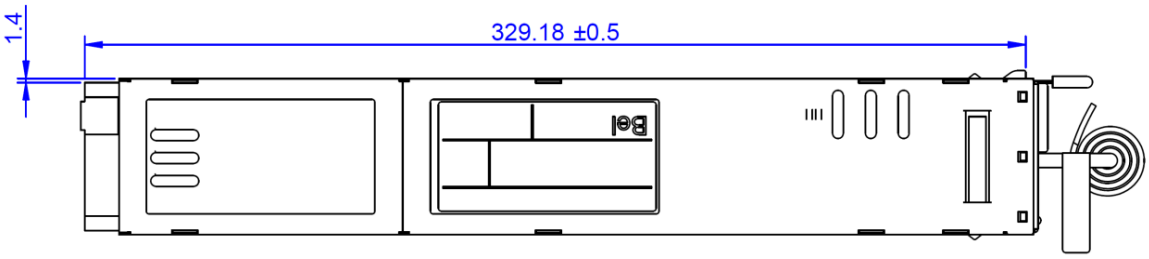


Figure 31. Top View

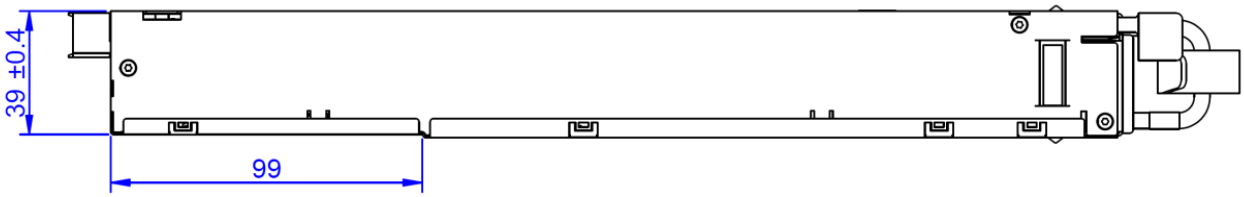


Figure 32. Side View 2


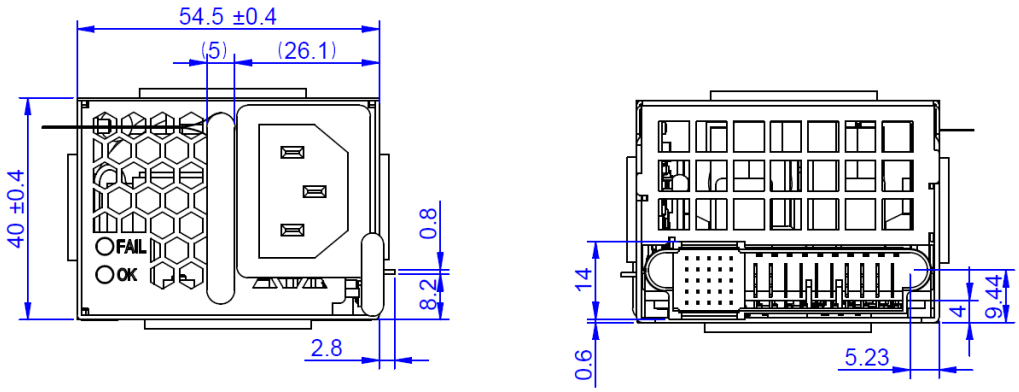


Figure 33. Front and Rear View

Downloaded from Arrow.com.

PFE1500-12-054NAC, PFE1500-12-054RAC and PFE1500-12NACS412: C16 Type Input AC connector, RongFeng SS-120B-1.0-4.0Ad or equivalent

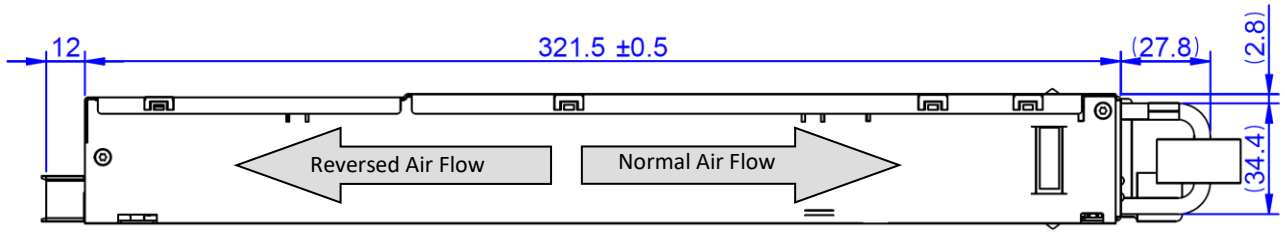

NOTE: A 3D step file of the power supply casing is available on request.

Figure 17. Side View 1

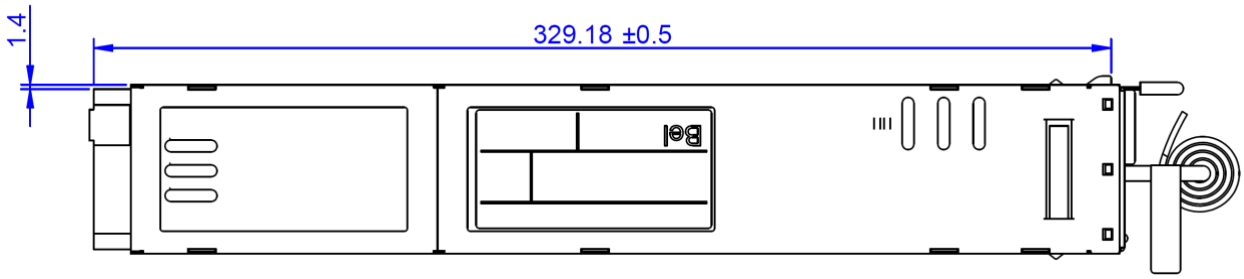


Figure 18. Top View

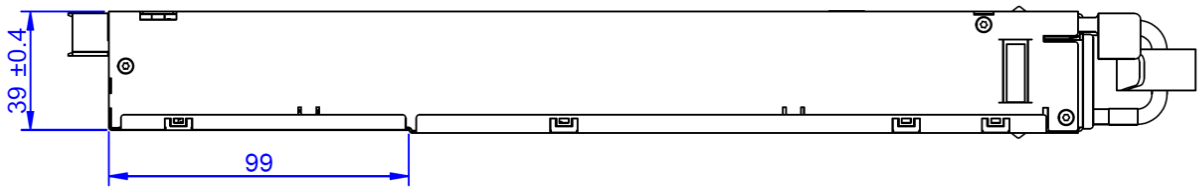


Figure 19. Side View 2

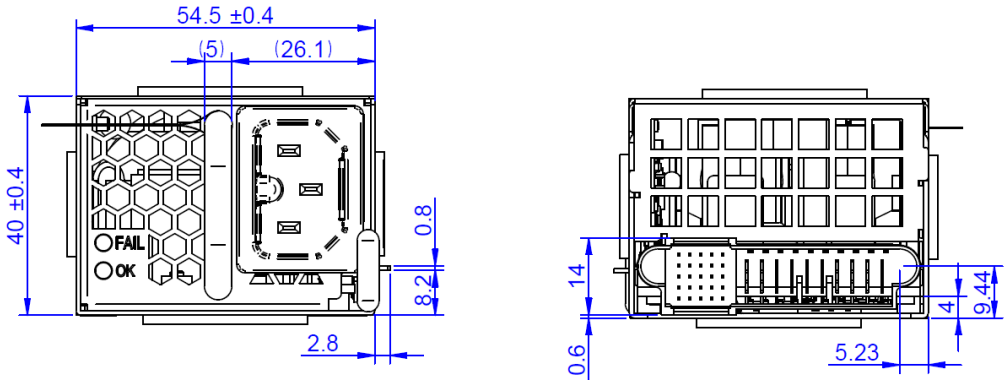


Figure 20. Front and Rear View

© 2024 Bel Fuse Inc.


Downloaded from Arrow.com.

14. CONNECTIONS

AC INPUT CONNECTOR:

PFE1500-12-054NA/RA,PFE1500-12NA/RAS412: Power supplier connector: IEC320 C14 type
PFE1500-12-054NAC/RAC,PFE1500-12NACS412: Power supplier connector: IEC320 C16 type
PFE1500-12-054NAH/RAH,PFE1500-12NAHS412: Power supplier connector: RongFeng P/N RF-203-D-1.0
Mating connector:
BizLink, type: BC-326, http://www.bizlinktech.com/
LongWell, type: LS-26, http://www.longwell.com/cn/

DC OUTPUT CONNECTOR:

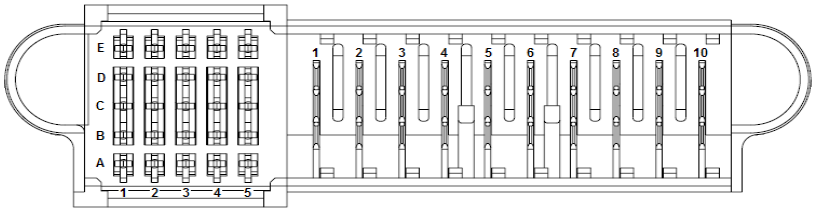

Power Supply Connector: Tyco Electronics P/N 1926736-3 or FCI connector 10133129-002LF or equivalent
(NOTE: Column 5 is recessed (short pins))
Mating Connector: Tyco Electronics P/N 2-1926739-5 or FCI 10108888-R10253SLF

PIN	NAME	DESCRIPTION
Output		
6, 7, 8, 9, 10	V1	+12 VDC main output
1, 2, 3, 4, 5	PGND	Power ground (return)
Control Pins		
A1	VSB	Standby positive output (+3.3/5 V_{SB} or 12 V_{SB})
B1	VSB	Standby positive output (+3.3/5 V_{SB} or 12 V_{SB})
C1	VSB	Standby positive output (+3.3/5 V_{SB} or 12 V_{SB})
D1	VSB	Standby positive output (+3.3/5 V_{SB} or 12 V_{SB})
E1	VSB	Standby positive output (+3.3/5 V_{SB} or 12 V_{SB})
A2	SGND	Signal ground (return)
B2	SGND	Signal ground (return)
C2	HOTSTANDBYEN_H	Hot standby enable signal: active-high
D2	VSB_SENSE_R	Standby output negative sense **(Not used for 12 V_{SB} model)**
E2	VSB_SENSE	Standby output positive sense **(Not used for 12 V_{SB} model)**
A3	APS	I^2C address and protocol selection (select by a pull down resistor)
B3	N/C	Reserved
C3	SDA	I^2C data signal line
D3	V1_SENSE_R	Main output negative sense
E3	V1_SENSE	Main output positive sense
A4	SCL	I^2C clock signal line
B4	PSON_L	Power supply on input (connect to A2/B2 to turn unit on): active-low
C4	SMB_ALERT_L	SMB Alert signal output: active-low
D4	N/C	Reserved
E4	ACOK_H	AC input OK signal: active-high
A5	PSKILL_H	Power supply kill (lagging pin): active-high
B5	ISHARE	Current share bus (lagging pin)
C5	PWOK_H	Power OK signal output (lagging pin): active-high
D5	VSB_SEL	Standby voltage selection (lagging pin) **(Not used for 12 V_{SB} model)**
E5	PRESENT_L	Power supply present (lagging pin): active-low

Downloaded from Arrow.com.

15. ACCESSORIES

ITEM	DESCRIPTION	ORDERING PART NUMBER	SOURCE
	**Bel Power Solutions I²C Utility** Windows XP/Vista/7 compatible GUI to program, control and monitor PFE Front-Ends (and other I²C units)	N/A	belfuse.com/power-solutions
	**Dual Connector Board** Connector board to operate 2 PFE units in parallel.	SNP-OP-BOARD-01 or YTM.G1Q01.0	belfuse.com/power-solutions

For more information on these products consult: tech.support@psbel.com

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.
TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.

Asia-Pacific
+86 755 298 85888

Europe, Middle East
+353 61 49 8941

North America
+1 866 513 2839

© 2024 Bel Fuse Inc.

Downloaded from Arrow.com.