

2900701

https://www.phoenixcontact.com/us/products/2900701

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



VARIOFACE module with screw connection and RJ45 connector

## Your advantages

- RJ45 connector, CAT3, 8-pos.
- · Screw connection
- 1:1 connection
- · Metal foot
- Screw or spring-cage connection (direct plug-in technology)

#### Commercial data

Item number	2900701
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	C423
Product key	DK2113
GTIN	4046356547802
Weight per piece (including packing)	66 g
Weight per piece (excluding packing)	84.4 g
Customs tariff number	85366990
Country of origin	US



2900701

https://www.phoenixcontact.com/us/products/2900701

### Technical data

### Product properties

Product type	Interface module
Product family	VARIOFACE Professional
Number of positions	8

### Electrical properties

Nominal voltage U <sub>N</sub>	48 V AC/DC
Max. current carrying capacity per branch	1 A
Max. total current of all branches	4 A

#### Connection data

#### Field level

Connection in acc. with standard	IEC / EN
Connection method	Screw connection
Stripping length	8 mm
Screw thread	M 3
Conductor cross section rigid	0.2 mm² 4 mm²
Conductor cross section flexible	0.2 mm² 2.5 mm²
Conductor cross section AWG	24 12
Tightening torque	0.5 Nm 0.6 Nm

#### Controller level

Connection method	RJ45 jack
Number of connections	1
Number of positions	8

### Signaling

Status display	no
Status display present	no

### Dimensions

### Item dimensions

Width	26.9 mm
Height	69 mm
Depth	62 mm

### Material specifications

Color	gray (RAL 7042)
Housing insulation material	Polyamide PA non-reinforced

#### Environmental and real-life conditions



2900701

https://www.phoenixcontact.com/us/products/2900701

#### Ambient conditions

Ambient temperature (operation)	-20 °C 50 °C
Ambient temperature (storage/transport)	-20 °C 70 °C

### Standards and regulations

Standards/regulations	EN 50178
-----------------------	----------

### Mounting

Mounting type	DIN rail mounting
Mounting position	any

#### Notes


otes	
Notes on operation	For proper use, the specifications of the installation directive (see Downloads) must be observed. For applications or use with third-party products, the specifications, and the safety and warning instructions of the respective third-party manufacturer must also be met.



2900701

https://www.phoenixcontact.com/us/products/2900701

# Drawings

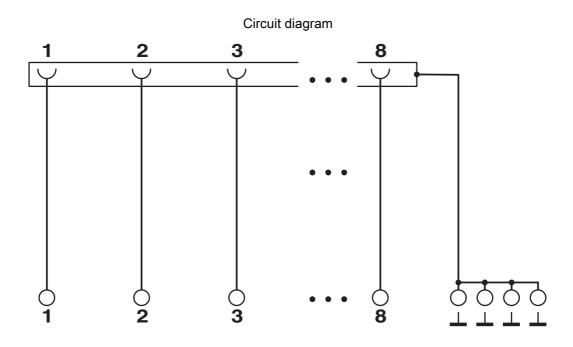



2900701

https://www.phoenixcontact.com/us/products/2900701

## **Approvals**

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/2900701

•	CSA Approval ID: 2122203				
		Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
		48 V	1 A	28 - 12	-

. <b>71</b>	<b>cUL Recognized</b> Approval ID: E238705				
		Nominal voltage $U_N$	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
		48 V	1 A	30 - 12	-

<b>7.1</b>	<b>UL Recognized</b> Approval ID: E238705				
		Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
		48 V	1 A	30 - 12	-

<b>@</b>	CSAus Approval ID: 2122203				
		Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
		48 V	1 A	28 - 12	-



2900701

https://www.phoenixcontact.com/us/products/2900701

## Classifications

UNSPSC 21.0

_			_
	വ	ΛΟ	ľ
-		Α.	١.٦

	ECLASS-13.0	27141152	
ΕΊ	ПМ		
	ETIM 9.0	EC002780	
U	UNSPSC		

39121400



2900701

https://www.phoenixcontact.com/us/products/2900701

## Environmental product compliance

#### EU RoHS

Yes, No exemptions
EFUP-E
No hazardous substances above the limits
No substance above 0.1 wt%

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com