


IEEE 1394B FIRE WIRE 1.062Gb TRANSCIVER LINE INTERFACE MODULE

Copperhead™ Series

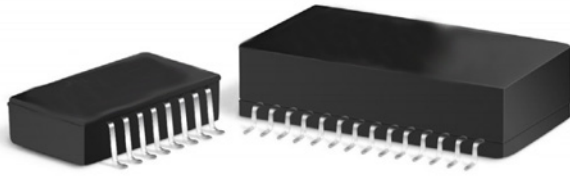

- ⦿ Low power dissipation
- ⦿ Low transmit/receive jitter
- ⦿ Recommended for distances up to 20 meters
- ⦿ Small package incorporating active transmit and passive receive circuits with integrated isolation transformers.
- ⦿ Electrostatic-Sensitive Device (ESD)
- ⦿ Operating & Storage Temperature: -55°C to +125°C
- ⦿ Lead Finish: Sn63Pb37
- ⦿ Moisture Sensitivity Level: 3

TRANSMITTER - Electrical Specifications @ 25°C

Part Number	Input Data Voltage						Input Voltage Differential			Input Current		Differential Signal Level		
	VIL (V)			VIH (V)			VIN (mV)			IIL (μA)	IIH (μA)	VOUT (mV)		
	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	MAX	MAX	MIN	TYP	MAX
TM1062DUXB	1.35	1.63	1.88	2.07	2.33	2.58	150	800	1200	40	150	1350	1400	1500
TM1062HUXB	1.35	1.63	1.88	2.07	2.33	2.58	150	800	1200	500	750	1350	1400	1500
TM1062DU3XB	1.35	1.63	1.88	2.07	2.33	2.58	150	800	1200	500	750	1350	1400	1500
TM125TXHUA	1.35	1.63	1.88	2.07	2.33	2.58	150	800	1200	500	750	1350	1400	1500
TM125TX3DUA	1.35	1.63	1.88	2.07	2.33	2.58	150	800	1200	500	750	1350	1400	1500

TRANSMITTER - Additional Electrical Specifications @ 25°C

Part Number	Power Dissipation (mW)	Θja (°C/W)		Input Voltage (V)	Data Rate DR (Mb/s)		Total P-P Transmit Jitter * (pS)		Output Rise-Fall Time (20-80%) * (pS)		Return Loss (dB)
	TYP	@85°C	@125°C	TYP	MIN	MAX	TYP	MAX	MIN	MAX	MIN
TM1062DUXB	232	41	39	3.30	246	1062	62	94	275	400	12
TM1062HUXB	232	41	39	3.30	246	1062	62	94	275	400	12
TM1062DU3XB	700	34	30	3.30	246	1062	62	94	275	400	12
TM125TXHUA	232	41	39	3.30	98	246	62	94	275	400	12
TM125TX3DUA	700	41	39	3.30	98	246	62	94	275	400	12

TRANSFORMER COUPLED RECEIVER - Electrical Specifications @ 25°C

Part Number	Turns Ratio	Primary Inductance LM (μH)	Rise Time (20-80%) (pS)	Data Rate DR (Mb/s)		Winding Resistance DCR	Insertion Loss (dB)	Return Loss (dB)
	TYP	MIN	MAX	MIN	MAX	TYP	MAX	MIN
TM1062DUXB	1:1	4.5	300	246	1062	0.20	2	12
TM1062HUXB	1:1	4.5	300	246	1062	0.20	2	12
TM1062DU3XB	1:1	4.5	300	246	1062	0.20	2	12
TM125TXHUA	1:1	44	300	98	246	0.20	2	12
TM125TX3DUA	1:1	44	300	98	246	0.20	2	12

NOTES:

* At 1062 or 125 Mb/s Data Rate, PN7 Data Pattern

1. Add suffix "NL" for RoHS compliant version; i.e. TM1062DUXB becomes TM1062DUXBNL. NL parts have 100% SN Lead Finish.



Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2025. iNRCORE, LLC. All rights reserved.



M186.H (08AUG25)

IEEE 1394B FIRE WIRE 1.062Gb TRANSCIVER LINE INTERFACE MODULE


Copperhead™ Series

Mechanicals

TM1062DUXB / TM1062DU3XB / TM125TX3DUA

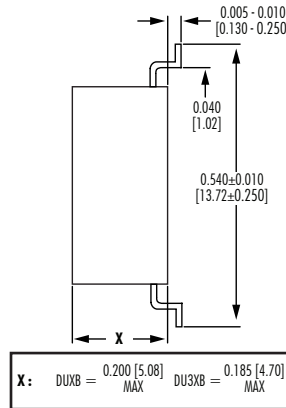
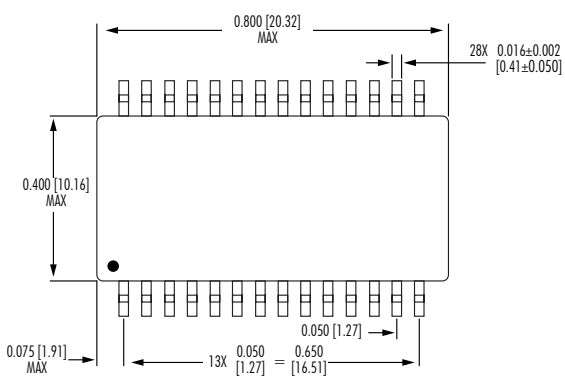


Dimensions: inch [mm]
Tolerance (unless otherwise specified): ±0.005 [0.13]

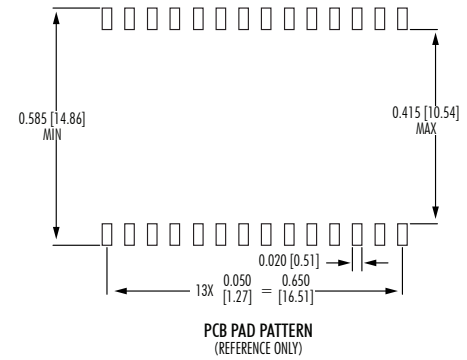


Mechanicals

TM1062HUXB / TM125TXHUA

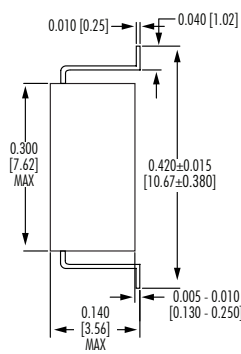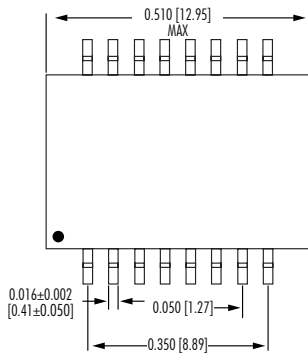

Dimensions: inch [mm]
Tolerance (unless otherwise specified): ±0.005 [0.13]

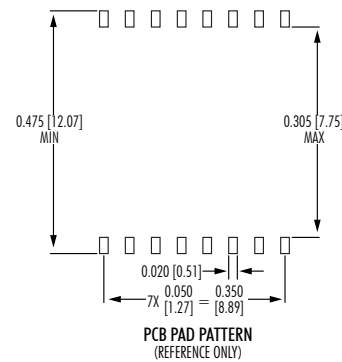


IEEE 1394B FIRE WIRE 1.062Gb TRANSCIVER LINE INTERFACE MODULE

Copperhead™ Series


TM1062HUXB / TM125TXHUA

Electrical Schematics

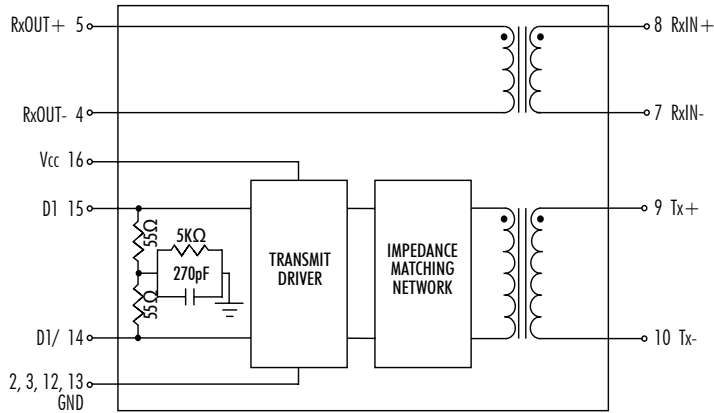


TM1062DUXB

Electrical Schematics

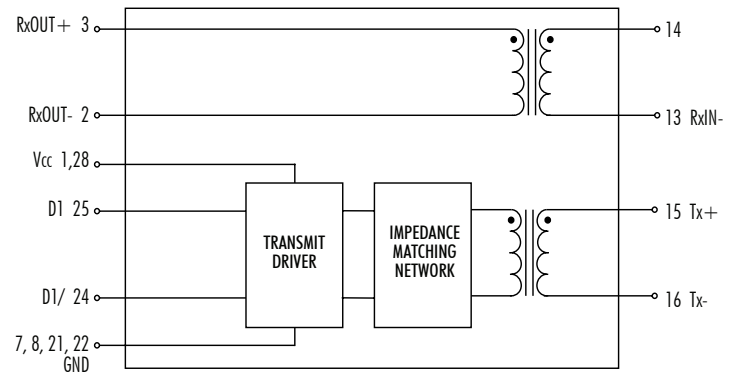

TM1062DU3XB / TM125TX3DUA


Electrical Schematics

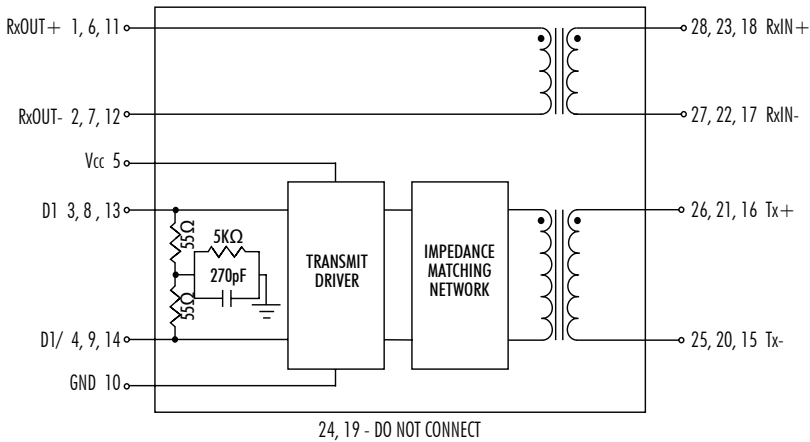

IEEE 1394B FIRE WIRE 1.062Gb TRANSCIVER LINE INTERFACE MODULE

Copperhead™ Series

Recommended Reflow Profile (Based on J-STD-020D)

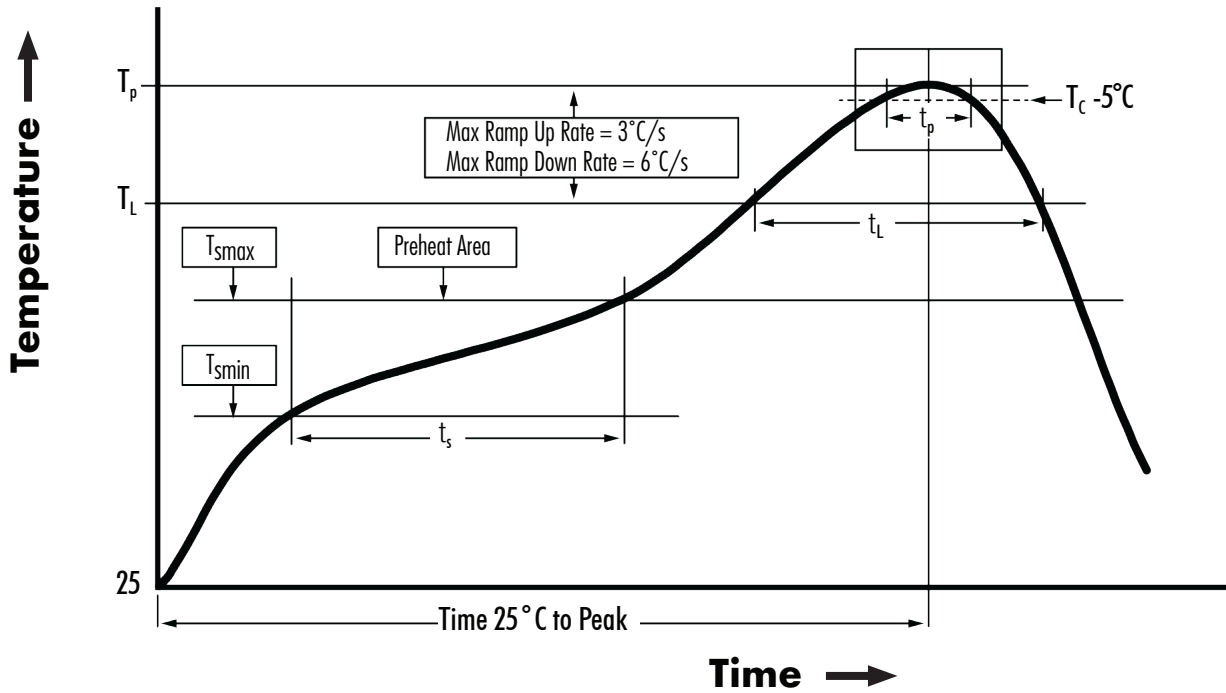

T_{SMIN} (°C)	T_{SMAX} (°C)	T_L (°C)	T_P (°C MAX)	t_s (s)	t_L (s)	t_p (s MAX)	Ramp-up rate (T_L to T_P)	Ramp-down rate (T_P to T_L)	Time 25°C to peak temperature (s MAX)
Tin/Lead Profile									
100	150	183	220	60 - 120	60 - 150	20	3°C/s MAX	6°C/s MAX	360
Non-Lead Profile									
150	200	217	245	60 - 120	60 - 150	30	3°C/s MAX	6°C/s MAX	480

NOTES:

1. All temperatures measured on the package leads.
2. Maximum number of reflow cycles not to exceed 2.
3. Reflow cycle applies only to surface mount parts.



iNRCORE, LLC
311 Sinclair Road, Bristol, PA 19007-6812 USA
Tel: +1.215.781.6400 Fax: +1.215.781.6430

www.iNRCORE.com

M186.H (08AUG25)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2025. iNRCORE, LLC. All rights reserved.