




Features

- Very compact design - doubles pair-density compared to older 303-type connector blocks; provides generous working space between connectors
- Front-facing jumper and test field- reduced jumper installation time plus easy access to test field
- Industry-standard configuration accepts all standard 303-type protector modules
- Multiple grounding options - choice of frame or isolated grounding

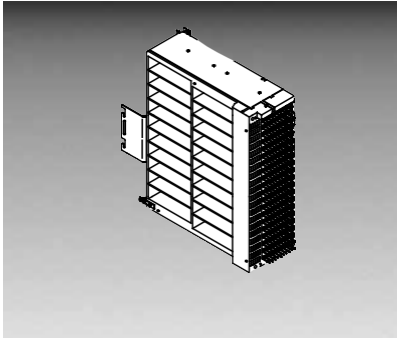

Model C(G)-391 100-Pair Connector

The CNI C(G)-391 Connector is our most compact 100-pair central/remote office connector. This 238 mm high (9.37 in.), narrow-profile connector is designed to increase frame capacity without sacrificing valuable workspace. One 303-type connector can be replaced by two C(G)-391 connectors – doubling the pair count in the same space.

The C(G)-391 connector is ideal for use in remote switch and digital line carrier locations, as frame space in huts and controlled environment vaults (CEVs) is usually at a premium. The C(G)-391 connector is also compatible with Private Automatic Branch Exchange (PABX) and Centrex systems that use combination frame configurations – where terminal blocks and connectors are mounted on the same side of the frame. It also provides an excellent termination point for protector frame systems that use separate intermediate distribution frames for cross-connecting.

The C(G)-391 connector's narrow profile provides 114 mm (4.5 in.) of workspace between adjacent connectors, allowing ample room for cross-connect (jumper) wiring and frame administration. The angled mounting allows easy access to the individual protector units, arranged in a 10x10 configuration. The front facing jumper and test fields are always within reach and the front and rear snap-through fanning strips encourage orderly wire management to simplify maintenance efforts. The stub cable and jumper wire terminations are completed using wire-wrap technology.

The C(G)-391 connector may be ordered stubless or with 22 or 24 AWG stub cable. Connectors equipped with a stub cable are shipped in the stub-down orientation. The stub direction may be reversed in the field as required.

The C(G)-391 connector accepts the full line of industry-standard 303-type, 5-pin protector modules including hybrid, solid-state and gas tube modules. The protector module contacts in the C(G)-391 connector are available with either tin-alloy or gold- plating. Accordingly, the plating on the pins of the protector modules should match the connector to ensure optimal performance.

Specifications

Plastic Materials

Main Body Polycarbonate, ivory, UL 94V-0

Metal Parts

Mounting Hardware Steel, zinc-plated

Current-Carrying Components Copper or copper alloys, tin-plated

Cable Stub

Description 22 or 24 AWG, 100-pair; bonded or unbonded PVC jacket, locking swivel mount

Pressure Unpressurized

Termination Wire-wrap

Grounding #10 AWG cable ground (drain wire) to mounting bracket

Resistance <5 milliohms (from cable shield bond to connector ground reference)

Cross-Connect (Jumper) Connections

Termination Wire-wrap

Contact Resistance < 2 milliohms

Dielectric Strength > 1500 VDC and >1000 VAC @ 50-60 Hz for two minutes

Insulation Resistance > 30 megohms @ 1000 VDC

Environmental Conditions Operating environment with temperature ranging from 0 °C (+32 °F) to +50 °C (+122 °F) up to 95% R.H.

Temperature Characteristics

High Temperature +60 °C (+140 °F) without deformation

Frame Vertical Capacities

Height 2.13 m (7.0 ft.) 700 pairs

Height 2.44 m (8.0 ft.) 800 pairs

Height 2.74 m (9.0 ft.) 1000 pairs

Height 3.51 m (11.5 ft.) 1200 pairs

Height 4.27 m (14.0 ft.) 1700 pairs

Comtest Networks Inc. (CNI)

comtestnetworks.com


Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth at comtestnetworks.com/<TBD>/disclaimer.pdf.

Model C(G)-391 100-Pair Connector

Product Dimensions

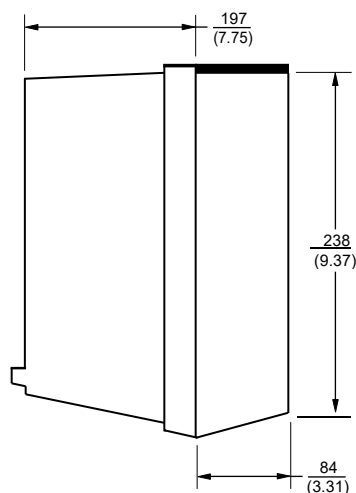

DIMENSIONS: MM
(INCHES)

Packaging Specifications

Product Code	Std. Pack	Stub Length m (ft.)	Size (H x W x D) mm (in.)	Weight kg (lb.)
Stubless				
NT8Gx0AA	1	0	310 x 360 x 180 (12 x 14 x 7)	3.2 (7)
22 AWG Stub				
NT8GxxAG	1	9.1 (30)	790 x 790 x 150 (31 x 31 x 6)	13.2 (29)
NT8GxxAL	1	15.2 (50)	790 x 790 x 150 (31 x 31 x 6)	20.0 (44)
NT8GxxAS	1	24.4 (80)	790 x 790 x 150 (31 x 31 x 6)	29.5 (65)
NT8GxxBA	1	30.5 (100)	790 x 790 x 300 (31 x 31 x 12)	36.3 (80)
24 AWG Stub				
NT8GxxAG	1	9.1 (30)	790 x 790 x 150 (31 x 31 x 6)	10.0 (22)
NT8GxxAL	1	15.2 (50)	790 x 790 x 150 (31 x 31 x 6)	14.1 (31)
NT8GxxAS	1	24.4 (80)	790 x 790 x 150 (31 x 31 x 6)	20.4 (45)
NT8GxxBA	1	30.5 (100)	790 x 790 x 300 (31 x 31 x 12)	24.9 (55)

How to Order

Product Code	Part Number	Description
Stubless		
NT8G10AA	A0352994	NT8G10AA, 100-PR, WW, Gold, Right Mount
NT8G20AA	A0409909	NT8G20AA, 100-PR, WW, Gold, Angle Mount
NT8G80AA	A0353600	NT8G80AA, 100-PR, WW, Tin, Left Mount
Gold, Angle Mount, Frame Ground, 24 AWG, Bonded Cable		
NT8G13AG	NT8G13AG	NT8, 100-PR, WW, 24 AWG, 30 ´ STUB, Down, NO MODS, Gold, Angle Mount
NT8G13AL	NT8G13AL	NT8, 100-PR, WW, 24 AWG, 50 ´ STUB, Down, NO MODS, Gold, Angle Mount
NT8G13AS	NT8G13AS	NT8, 100-PR, WW, 24 AWG, 80 ´ STUB, Down, NO MODS, Gold, Angle Mount
NT8G13BA	NT8G13BA	NT8, 100-PR, WW, 24 AWG, 100 ´ STUB, Down, NO MODS, Gold, Angle Mount
Gold, Angle Mount, Frame Ground, 22 AWG, Bonded Cable		
NT8G14AG	NT8G14AG	NT8, 100-PR, WW, 22 AWG, 30 ´ STUB, Down, NO MODS, Gold, Angle Mount
NT8G14AL	NT8G14AL	NT8, 100-PR, WW, 22 AWG, 50 ´ STUB, Down, NO MODS, Gold, Angle Mount
NT8G14AS	NT8G14AS	NT8, 100-PR, WW, 22 AWG, 80 ´ STUB, Down, NO MODS, Gold, Angle Mount
NT8G14BA	NT8G14BA	NT8, 100-PR, WW, 22 AWG, 100 ´ STUB, Down, NO MODS, Gold, Angle Mount
Gold, Right Mount, Frame Ground, 22 AWG, Bonded Cable		
NT8G14JG	NT8G14JG	NT8, 100-PR, WW, 22 AWG, 30 ´ STUB, Down, NO MODS, Gold, Right Mount
NT8G14JL	NT8G14JL	NT8, 100-PR, WW, 22 AWG, 50 ´ STUB, Down, NO MODS, Gold, Right Mount
NT8G14JS	NT8G14JS	NT8, 100-PR, WW, 22 AWG, 80 ´ STUB, Down, NO MODS, Gold, Right Mount
NT8G14KA	NT8G14KA	NT8, 100-PR, WW, 22 AWG, 100 ´ STUB, Down, NO MODS, Gold, Right Mount

Note: Order by Part Number.

Comtest Networks Inc. (CNI)
comtestnetworks.com

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth at comtestnetworks.com/<TBD>/disclaimer.pdf.

Model C(G)-391 100-Pair Connector

How to Order (Continued)

Product Code	Part Number	Description
Gold, Straight Mount, Frame Ground, 24 AWG, Bonded Cable		
NT8G13JG	NT8G13JG	NT8, 100-PR, WW, 24 AWG, 30 ´ STUB, Down, NO MODS, Gold, Straight Mount
NT8G13JL	NT8G13JL	NT8, 100-PR, WW, 24 AWG, 50 ´ STUB, Down, NO MODS, Gold, Straight Mount
NT8G13JS	NT8G13JS	NT8, 100-PR, WW, 24 AWG, 80 ´ STUB, Down, NO MODS, Gold, Straight Mount
NT8G13KA	NT8G13KA	NT8, 100-PR, WW, 24 AWG, 100 ´ STUB, Down, NO MODS, Gold, Straight Mount
Gold, Angle Mount, Frame Ground, 24 AWG, Bonded Cable		
NT8G23AG	NT8G23AG	NT8, 100-PR, WW, 24 AWG, 30 ´ STUB, Down, NO MODS, Gold, Angle Mount
NT8G23AL	NT8G23AL	NT8, 100-PR, WW, 24 AWG, 50 ´ STUB, Down, NO MODS, Gold, Angle Mount
NT8G23AS	NT8G23AS	NT8, 100-PR, WW, 24 AWG, 80 ´ STUB, Down, NO MODS, Gold, Angle Mount
NT8G23BA	NT8G23BA	NT8, 100-PR, WW, 24 AWG, 100 ´ STUB, Down, NO MODS, Gold, Angle Mount
Gold, Angle Mount, Frame Ground, 22 AWG, Bonded Cable		
NT8G24AG	NT8G24AG	NT8, 100-PR, WW, 22 AWG, 30 ´ STUB, Down, NO MODS, Gold, Angle Mount
NT8G24AL	NT8G24AL	NT8, 100-PR, WW, 22 AWG, 50 ´ STUB, Down, NO MODS, Gold, Angle Mount
NT8G24AS	NT8G24AS	NT8, 100-PR, WW, 22 AWG, 80 ´ STUB, Down, NO MODS, Gold, Angle Mount
NT8G24BA	NT8G24BA	NT8, 100-PR, WW, 22 AWG, 100 ´ STUB, Down, NO MODS, Gold, Angle Mount
Tin, Left Mount, Isolated Ground, 24 AWG, Bonded Cable		
NT8G83AG	A0355687	NT8G83AG, 100-PR, WW, 24 AWG, 30 ´ STUB, Down, NO MODS, Tin, Left Mount
NT8G83AL	A0355689	NT8G83AL, 100-PR, WW, 24 AWG, 50 ´ STUB, Down, NO MODS, Tin, Left Mount
NT8G83AS	A0355690	NT8G83AS, 100-PR, WW, 24 AWG, 80 ´ STUB, Down, NO MODS, Tin, Left Mount
Tin, Left Mount, Isolated Ground, 22 AWG, Bonded Cable		
NT8G84AG	A0355693	NT8G84AG, 100-PR, WW, 22 AWG, 30 ´ STUB, Down, NO MODS, Tin, Left Mount
NT8G84BA	A0355697	NT8G84BA, 100-PR, WW, 22 AWG, 100 ´ STUB, Down, NO MODS, Tin, Left Mount

Note: Order by Part Number.

REV. 05/02/2020

Comtest Networks Inc. (CNI)
comtestnetworks.com

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth at comtestnetworks.com/<TBD>/disclaimer.pdf.