

Power Factor Correction Controller

FAN7527B

Description


The FAN7527B provides simple and high-performance active Power Factor Correction (PFC). The FAN7527B is optimized for electronic ballasts and low-power, high-density power supplies that require minimum board size, reduced external components, and low power dissipation. Because the R/C filter is included in the current-sense block, an external R/C filter is not necessary. Special circuitry prevents no-load runaway conditions. Regardless of the supply voltage, the output drive clamping circuit limits the overshoot of the power MOSFET gate drive, which improves system reliability.

Features

- Internal Startup Timer
- Internal R/C Filter Eliminates the Need for External R/C Filter
- Precise Adjustable Output Over-Voltage Protection
- Zero Current Detector
- One Quadrant Multiplier
- Trimmed 1.5% Internal Band Gap Reference
- Under-Voltage Lockout with 3 V of Hysteresis
- Totem-Pole Output with High-State Clamp
- Low Startup and Operating Current
- 8-Pin SOP or 8-Pin DIP
- These Devices are Pb-Free and are RoHS Compliant

Applications

- Electronic Ballast
- SMPS




PDIP8 9.42x6.38, 2.54P
CASE 646CM



SOIC8
CASE 751EB

MARKING DIAGRAM

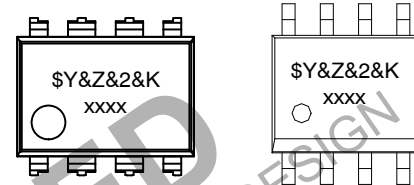

\$Y = onsemi Logo
 &Z = Assembly Plant Code
 &2 = 2-Digit Date Code
 &K = Lot Run Traceability Code
 xxxx = Specific Device Code

ORDERING INFORMATION

Device	Package	Shipping [†]
FAN7527BN	PDIP8 (Pb-Free)	3000 / Tube
FAN7527BMX	SOIC8 (Pb-Free)	2500 / Tape & Reel

[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, [BRD8011/D](http://www.onsemi.com/BRD8011/D).

NOTE: Operating Temperature Range of both devices is -25 to +125°C

FAN7527B

BLOCK DIAGRAM

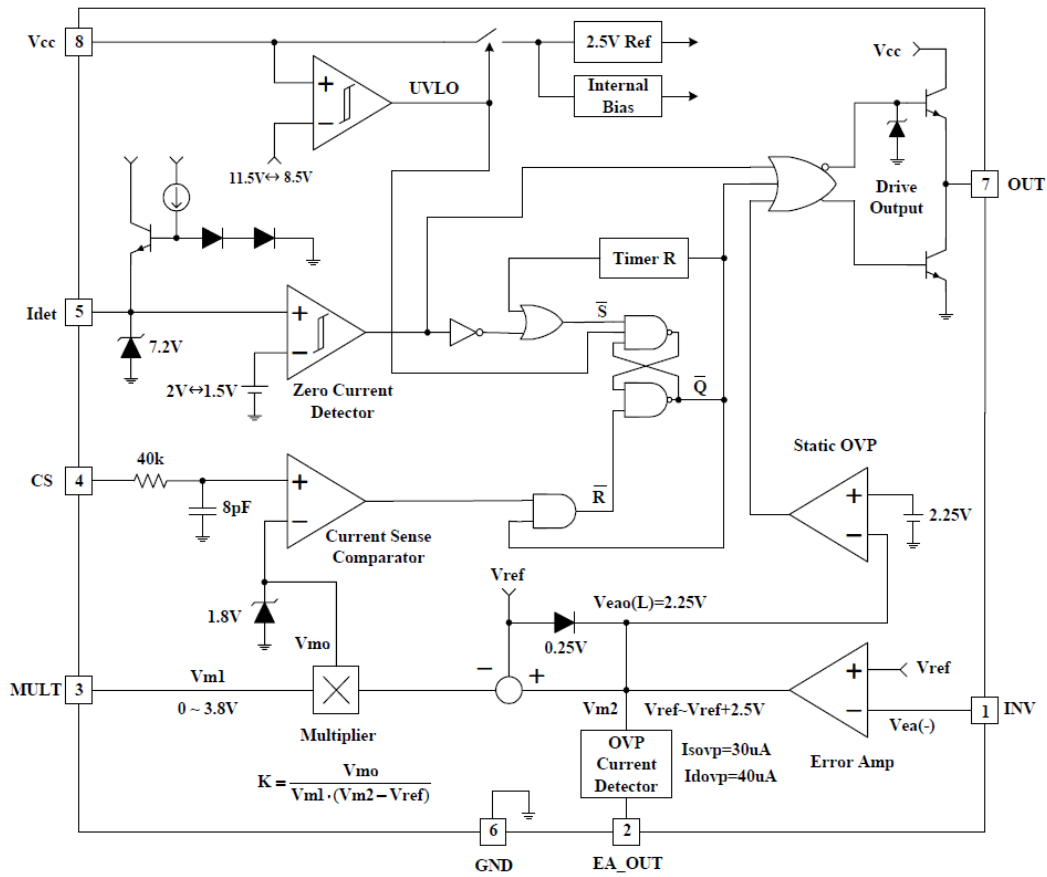


Figure 1. Block Diagram

FAN7527B

PIN CONFIGURATION

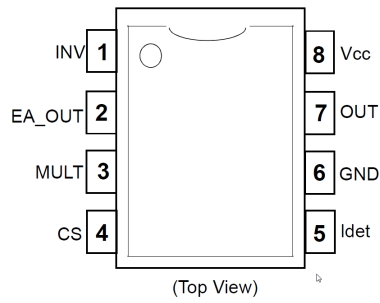


Figure 2. Pin Configuration

PIN DEFINITIONS

Pin #	Name	Description
1	INV	Inverting input of the error amplifier. The output of the boost converter should be resistively divided to 2.5 V and connected to this pin.
2	EA_OUT	Output of the error amplifier. Feedback compensation network is placed between this pin and the INV pin.
3	MULT	Input to the multiplier stage. The full-wave rectified AC voltage is divided to less than 2 V and is connected to this pin.
4	CS	Input of the PWM comparator. The MOSFET current is sensed by a resistor and the resulting voltage is applied to this pin. An internal R/C filter is included to reject high-frequency noise
5	Idet	Zero Current Detection (ZCD) input
6	GND	Ground
7	OUT	Gate driver output. Push-pull output stage is able to drive the power MOSFET with a peak current of 500 mA
8	V _{CC}	Supply voltage of driver and control circuits

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Min.	Max.	Unit
V _{CC}	Supply Voltage		30	V
I _{OH} , I _{OL}	Peak Drive Output Current		±500	mA
I _{CLAMP}	Driver Output Clamping Diodes V _O > V _{CC} or V _O < -0.3 V		±10	mA
I _{DET}	Detector Clamping Diodes		±10	mA
V _{IN}	Error Amplifier Multiplier and Comparator Input Voltages	-0.3	6.0	V
T _J	Operation Junction Temperature		+150	°C
T _{OPR}	Operating Temperature Range	-25	+125	°C
T _{STG}	Storage Temperature Range	-65	+150	°C
P _D	Power Dissipation	SOIC8	0.8	W
		PDIP8	1.1	W
Θ _{JA}	Thermal Resistance Junction–Ambient	SOIC8	150	°C/W
		PDIP8	110	°C/W

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

TEMPERATURE CHARACTERISTICS

(-25°C ≤ T_A ≤ 125°C)

Symbol	Parameter	Min.	Typ.	Max.	Unit
ΔV _{REF}	Temperature Stability Reference Voltage (V _{REF})		20		mV
ΔK/ΔT	Temperature Stability for Multiplier Gain (K)		-0.2		% / °C

ELECTRICAL CHARACTERISTICS(V_{CC} = 14 V, -25°C ≤ T_A ≤ 125°C, unless otherwise stated.)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
--------	-----------	------------	------	------	------	------

UNDER-VOLTAGE LOCKOUT

V _{th(st)}	Start Threshold Voltage	V _{CC} Increasing	10.5	11.5	12.5	V
H _{Y(st)}	UVLO Hysteresis		2	3	4	V

SUPPLY CURRENT SECTION

I _{ST}	Startup Supply Current	V _{CC} = V _{th(st)} - 0.2 V	10	60	100	μA
I _{CC}	Operating Supply Current	Output Not Switching		3	6	mA
I _{CC(OVP)}	Operating Current at OVP	V _{INV} = 3 V		1.7	4.0	mA
I _{DCC}	Dynamic Operating Supply Current	50 kHz, C _I = 1 nF		4	8	mA

ERROR AMPLIFIER SECTION

V _{REF}	Voltage Feedback Input Threshold	I _{REF} = 0 mA, T _A = 25°C	2.465	2.500	2.535	V
		25°C ≤ T _A ≤ 125°C	2.440	2.500	2.560	
ΔV _{FEF1}	Line Regulation	14 V ≤ V _{CC} ≤ 25 V		0.1	10.0	mV
ΔV _{FEF3}	Temperature Stability of V _{REF} (Note 1)	-25°C ≤ T _A ≤ 125°C		20		mV
I _{b(ea)}	Input Bias Current		-0.5		0.5	μA
I _{SOURCE}	Output Source Current	V _{M2} = 4 V	-2	-4		mA
I _{SINK}	Output Sink Current	V _{M2} = 4 V	2	4		mA
V _{EAO(H)}	Output Upper Clamp Voltage (Note 1)	I _{SOURCE} = 0.1 mA		6		V
V _{EAO(L)}	Output Lower Clamp Voltage (Note 1)	I _{SINK} = 0.1 mA		2.25		V
G _V	Large Signal Open-Loop Gain (Note 1)		60	80		dB
PSRR	Power Supply Rejection Ratio (Note 1)	14 V ≤ V _{CC} ≤ 25 V	60	80		dB
GBW	Unity Gain Bandwidth (Note 1)			1		MHz
SR	Slew Rate (Note 1)			0.6		V/μs

MULTIPLIER SECTION

I _{b(m)}	Input Bias Current (Pin 3)		-0.5		0.5	μA
ΔV _{M1}	M1 Input Voltage Range (Pin 3)				3.8	V
ΔV _{M2}	M2 Input Voltage Range (Pin 2)		V _{REF}		V _{REF} +2.5	V
K	Multiplier Gain (Note 1)	V _{M1} = 1 V, V _{M2} = 3.5 V	0.36	0.44	0.52	1 / V
V _{OMAX(m)}	Maximum Multiplier Output Voltage	V _{INV} = 0 V, V _{M1} = 4 V	1.65	1.80	1.95	V
ΔK/ΔT	Temperature Stability of K (Note 1)	-25°C ≤ T _A ≤ 125°C		-0.2		% / °C

CURRENT SENSE SECTION

V _{IO(CS)}	Input Offset Voltage (Note 1)	V _{M1} = 0 V, V _{M2} = 2.2 V	-10	3	10	mV
I _{b(CS)}	Input Bias Current	0 V ≤ V _{CS} ≤ 1.7 V	-1.0	-0.1	1.0	μA
t _{D(CS)}	Current Sense Delay to Output (Note 1)			200	500	ns

ZERO CURRENT DETECT SECTION

V _{TH(DET)}	Input Voltage Threshold	V _{DET} Increasing	1.7	2.0	2.3	V
H _{Y(DET)}	Detect Hysteresis		0.2	0.5	0.8	V
V _{CLAMP(L)}	Input Low Clamp Voltage	I _{DET} = -100 μA	0.45	0.75	1.00	V
V _{CLAMP(H)}	Input High Clamp Voltage	I _{DET} = 3 mA	6.5	7.2	7.9	V

ELECTRICAL CHARACTERISTICS (continued)(V_{CC} = 14 V, -25°C ≤ T_A ≤ 125°C, unless otherwise stated.)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
--------	-----------	------------	------	------	------	------

ZERO CURRENT DETECT SECTION

I _b (DET)	Input Bias Current	1 V ≤ V _{DET} ≤ 5 V	-1.0	-0.1	1.0	μA
I _{CLAMP(D)}	Input High/Low Clamp Diode Current (Note 1)				±3	mA

OUTPUT SECTION

V _{OH}	Output Voltage High	I _O = -10 mA	10.5	11.0		V
V _{OL}	Output Voltage Low	I _O = 10 mA		0.8	1.0	V
t _R	Rising Time (Note 1)	C _L = 1 nF		130	200	ns
t _F	Falling Time (Note 1)	C _L = 1 nF		50	120	ns
V _{OMAX(O)}	Maximum Output Voltage	V _{CC} = 20 V, I _O = 100 μA	12	14	16	V
V _{OMIN(O)}	Output Voltage with UVLO Activated	V _{CC} = 5 V, I _O = 100 μA			1	V

RESTART TIMER SECTION

t _{D(RST)}	Restart Time Delay	V _{M1} = 1 V, V _{M2} = 3.5 V		150		μs
---------------------	--------------------	--	--	-----	--	----

OVER-VOLTAGE PROTECTION SECTION

I _{SOVP}	Soft OVP Detecting Current		25	30	35	μA
I _{DOVP}	Dynamic OVP Detecting Current		35	40	45	μA
V _{OVP}	Static OVP Threshold Voltage	V _{INV} = 2.7 V	2.10	2.25	2.40	V

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

1. These parameters, although guaranteed, are not 100% tested in production.

Multiplier Gain:

$$K = \frac{\text{Pin4_Threshold}}{V_{M1} \times (V_{M2} - V_{REF})}$$

where V_{M1} = V_{PIN3}, V_{M2} = V_{PIN2}

TYPICAL PERFORMANCE CHARACTERISTICS

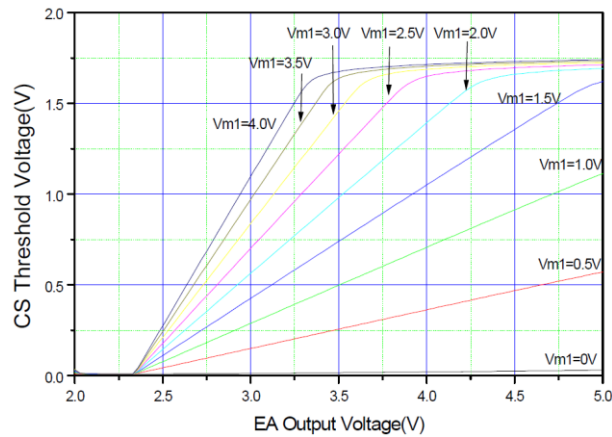


Figure 3. Error Amplifier Output Voltage vs. Current Sensing Threshold

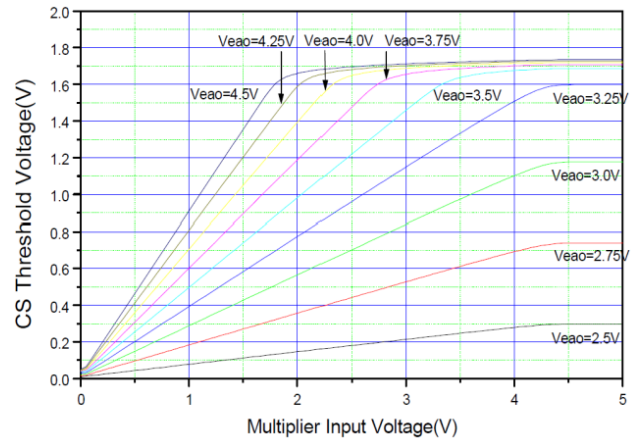


Figure 4. Multiplier Input Voltage vs. Current Sensing Threshold

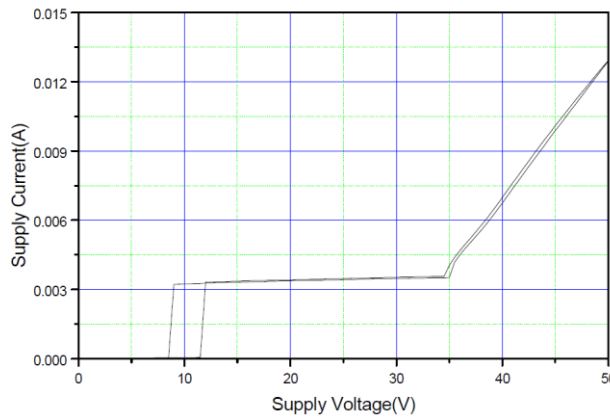


Figure 5. Supply Current vs. Supply Voltage

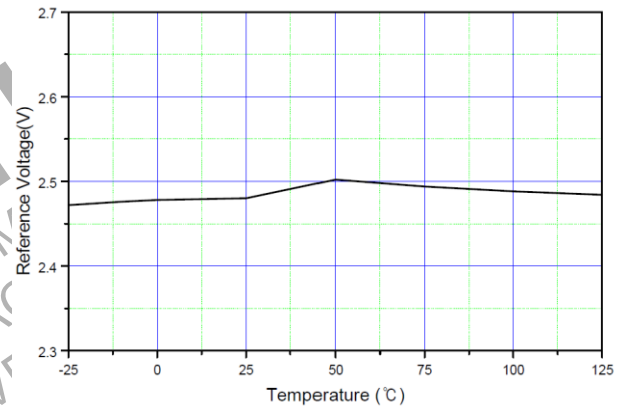


Figure 6. Reference Voltage vs. Temperature

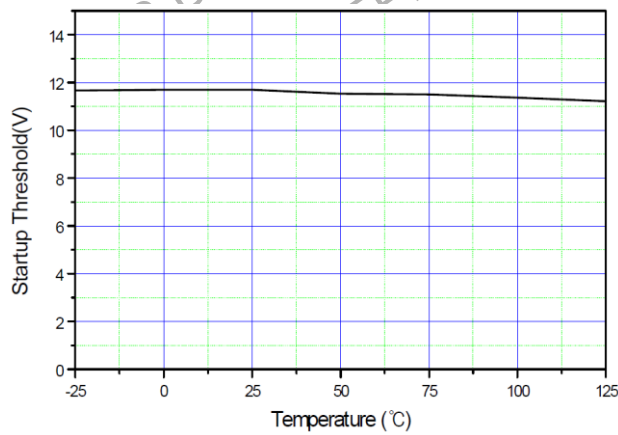


Figure 7. Startup Threshold vs. Temperature

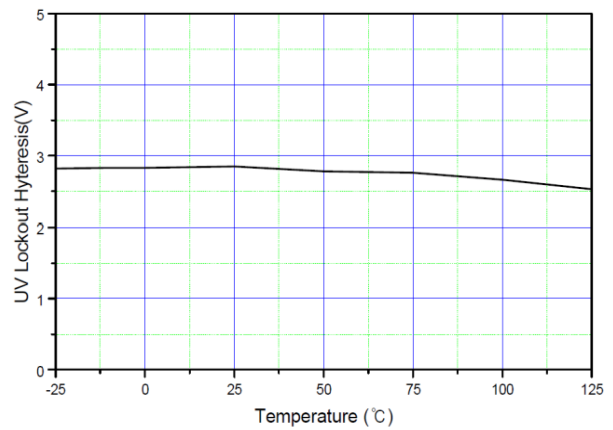


Figure 8. UVLO Hysteresis vs. Temperature

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

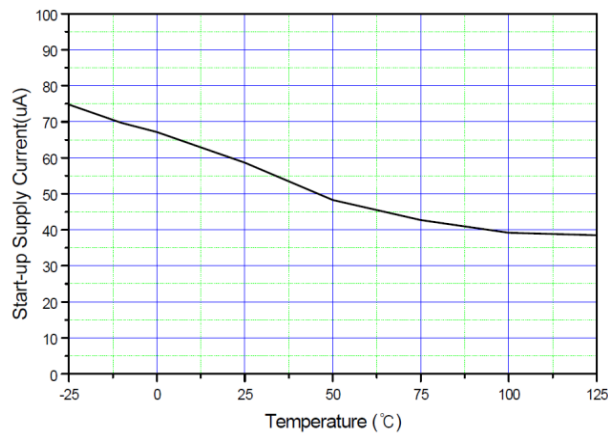


Figure 9. Startup Supply Current vs. Temperature

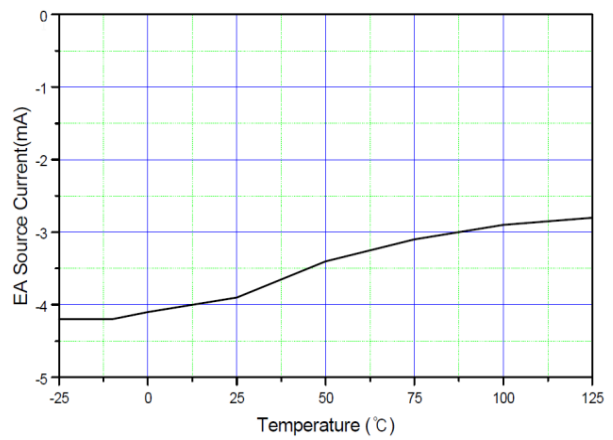


Figure 10. Error Amplifier Source Current

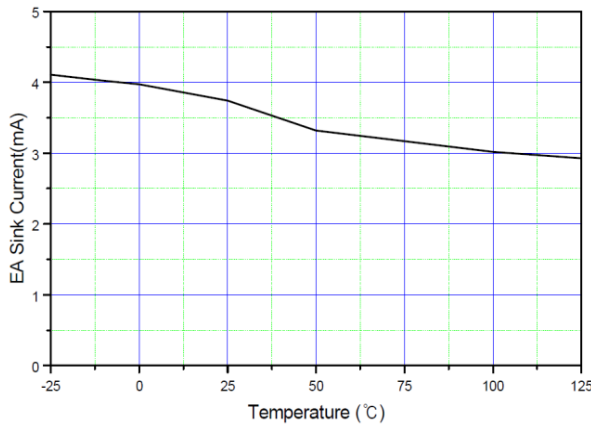


Figure 11. Error Amplifier Sink Current vs. Temperature

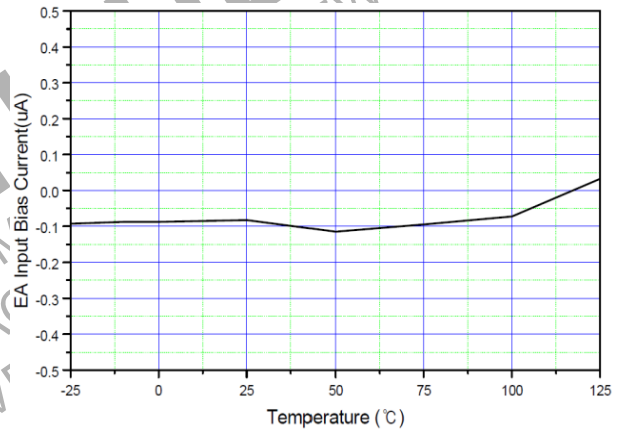


Figure 12. Error Amplifier Input Bias Current vs. Temperature

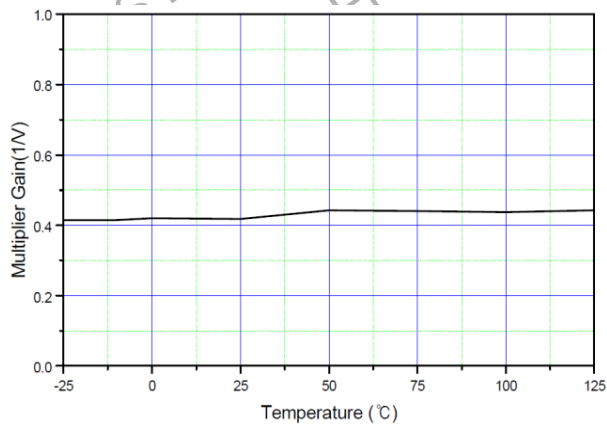
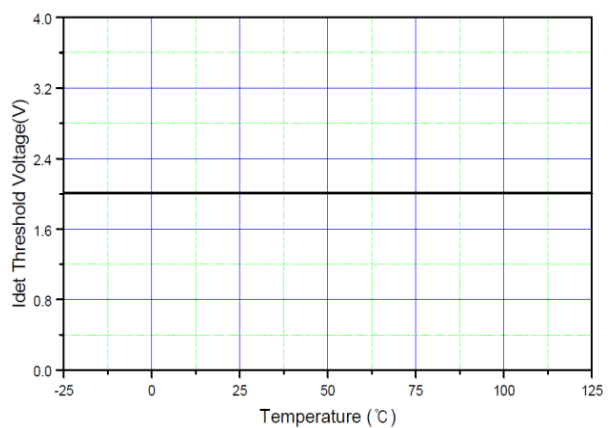


Figure 13. Multiplier Gain vs. Temperature

Figure 14. I_{DET} Threshold Voltage vs. Temperature

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

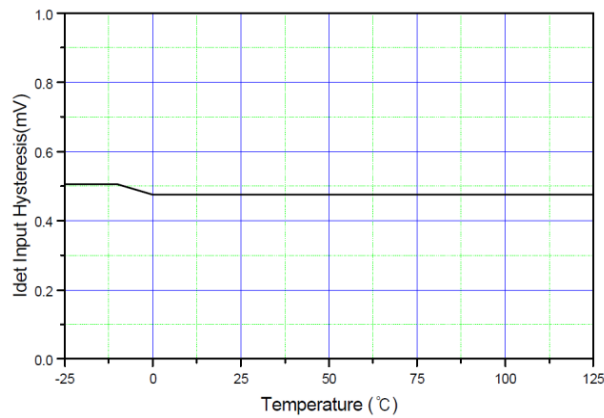


Figure 15. IDet Input Hysteresis vs. Temperature

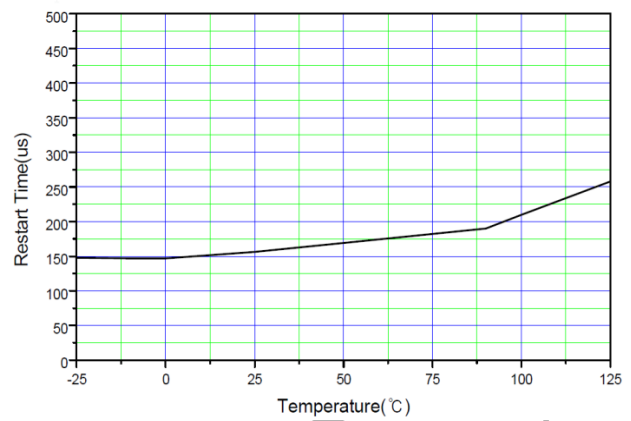


Figure 16. Restart Time vs. Temperature

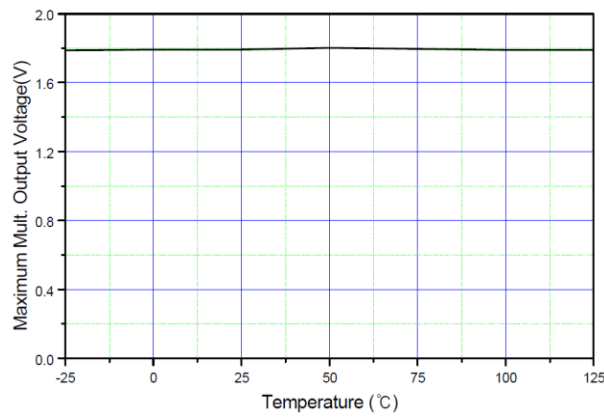


Figure 17. Maximum Multiplier Output Voltage vs. Temperature


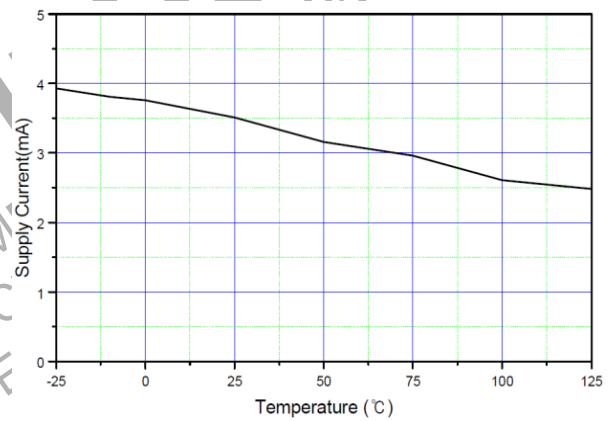


Figure 18. Supply Current vs. Temperature

PDIP8 9.42x6.38, 2.54P
CASE 646CM
ISSUE O

DATE 31 JUL 2016

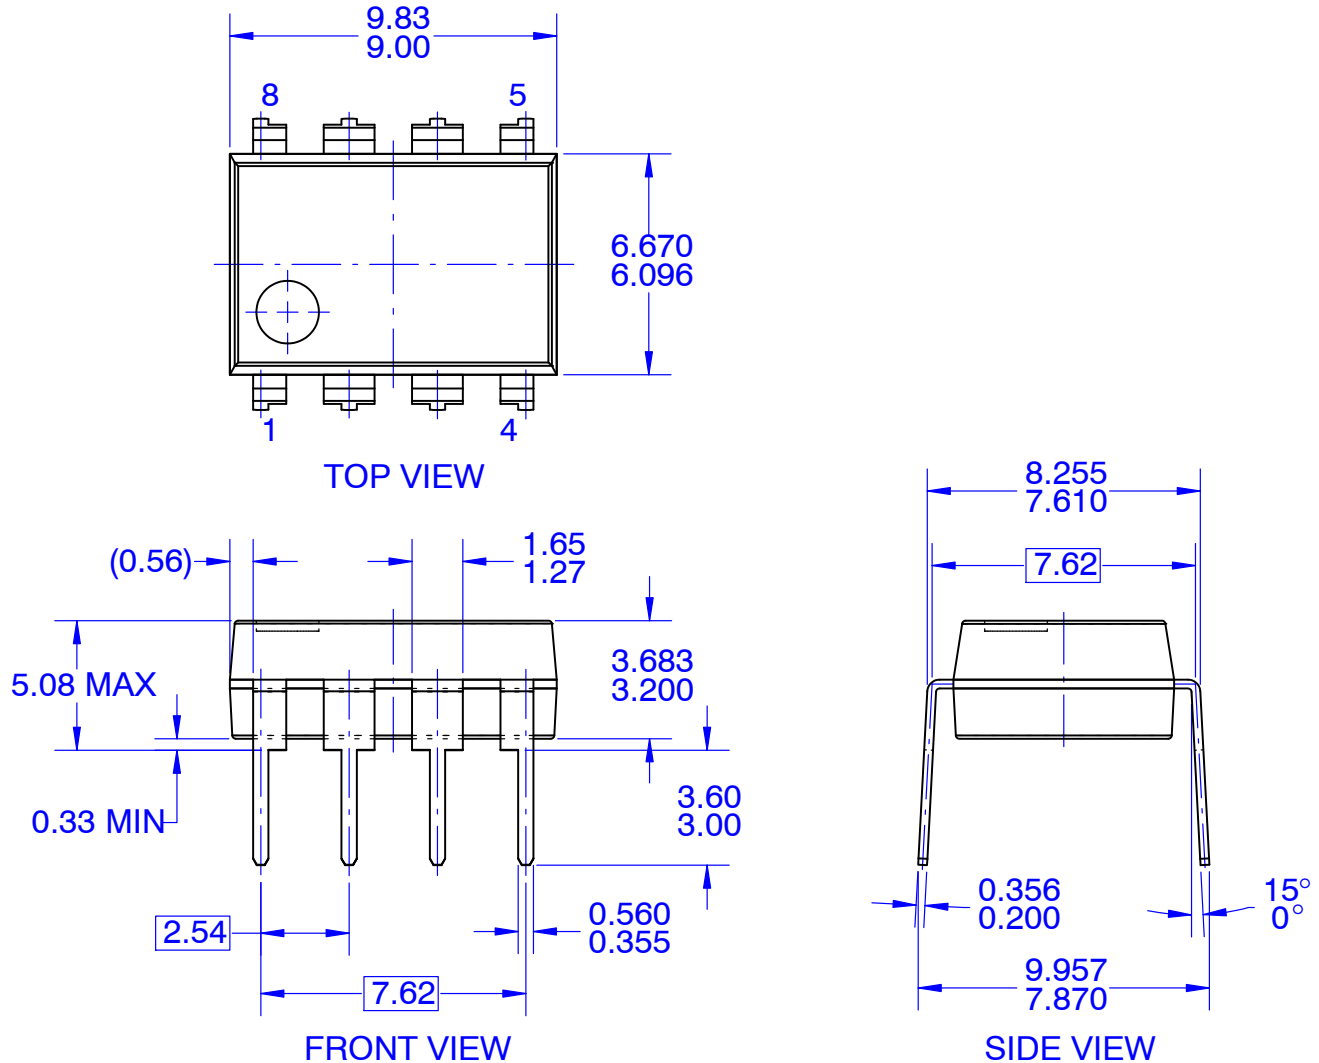

NOTES:






- A. CONFORMS TO JEDEC MS-001, VARIATION BA
- B. ALL DIMENSIONS ARE IN MILLIMETERS
- C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS
- D. DIMENSIONS AND TOLERANCES PER ASME Y14.5M-2009

DOCUMENT NUMBER:	98AON13468G	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.
DESCRIPTION:	PDIP8 9.42X6.38, 2.54P	PAGE 1 OF 1

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

SOIC8
CASE 751EB
ISSUE A

DATE 24 AUG 2017

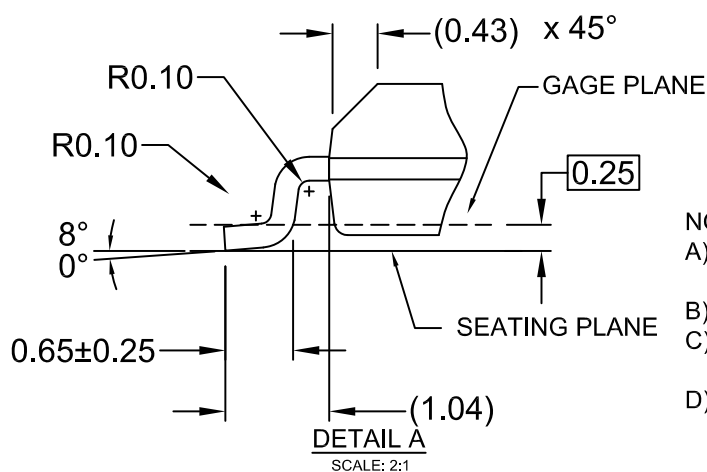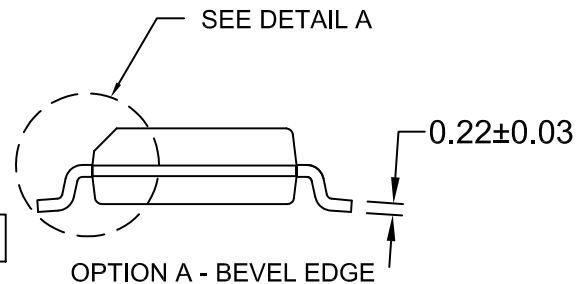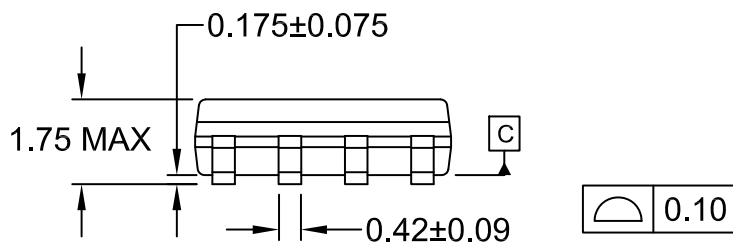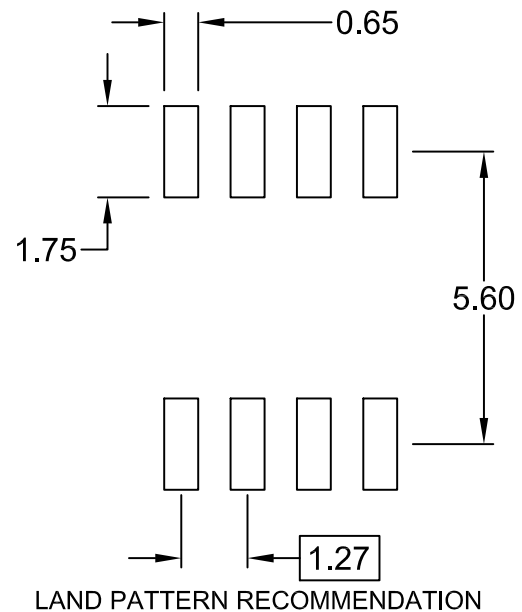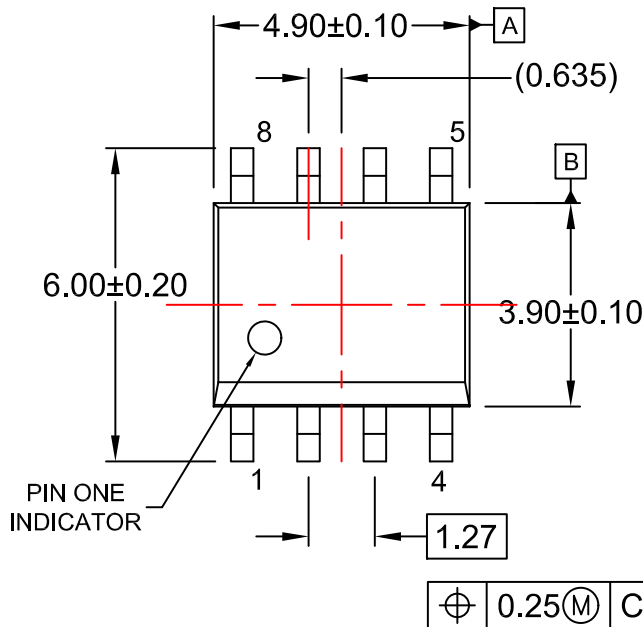

- NOTES:
- A) THIS PACKAGE CONFORMS TO JEDEC MS-012, VARIATION AA.
 - B) ALL DIMENSIONS ARE IN MILLIMETERS.
 - C) DIMENSIONS DO NOT INCLUDE MOLD FLASH OR BURRS.
 - D) LANDPATTERN STANDARD: SOIC127P600X175-8M

DOCUMENT NUMBER:	98AON13735G	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.
DESCRIPTION:	SOIC8	PAGE 1 OF 1

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at
www.onsemi.com/support/sales

