
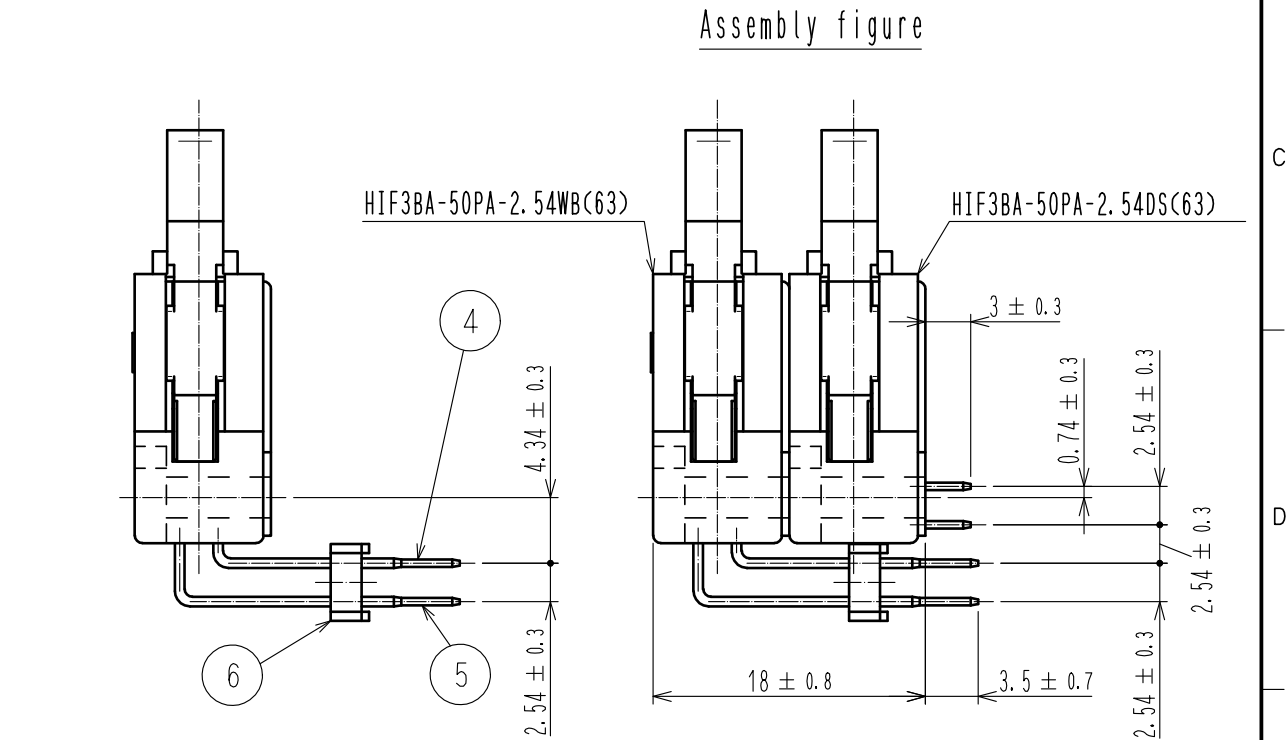
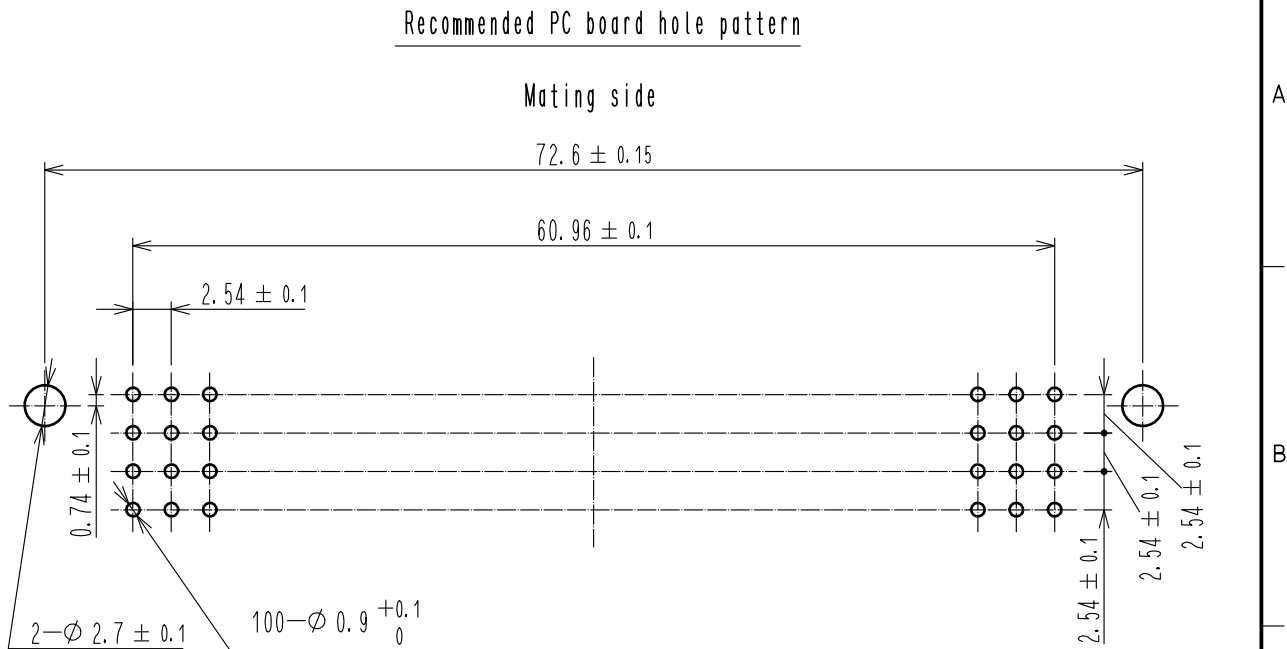
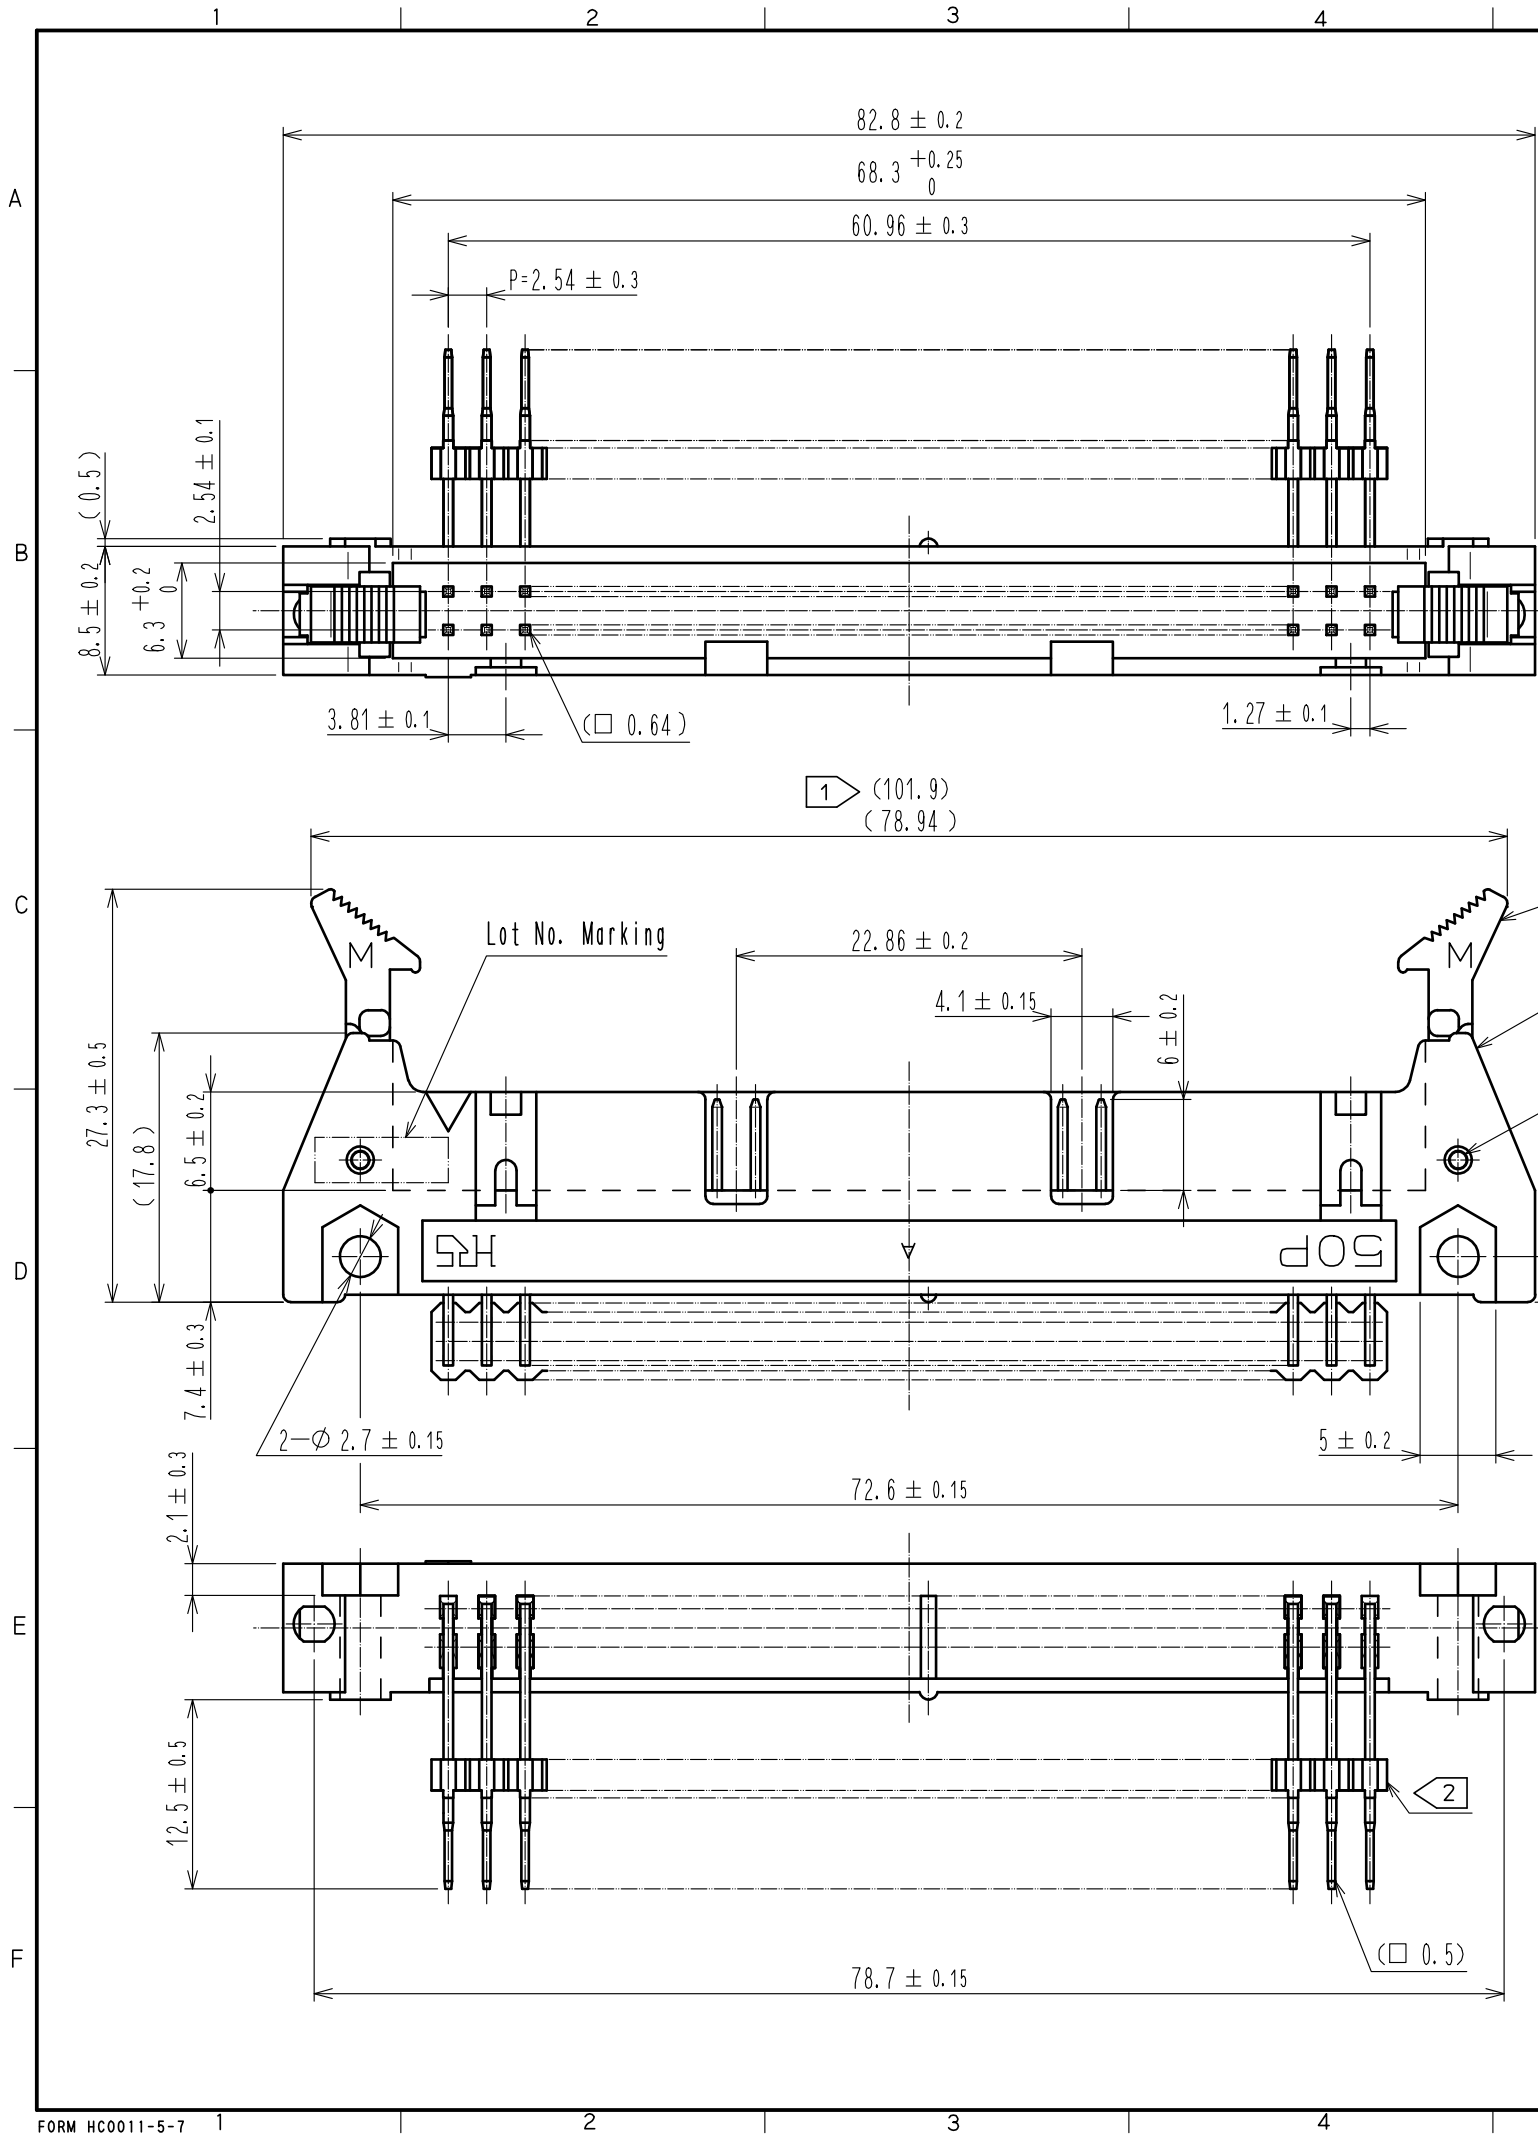




- Notes
- 1 The upper row dimension shows when the lock open out.
 - 2 Locator position is optional.
 - 3 The dimensions in parentheses are for reference.
 - 4 UL(File No. E52653)
C-UL(File No. E52653) authorization article.

				5	BRASS	Dip area : TIN-Plating 2μm min					
						Under plating : Nickel 2.5μm min					
3	STAINLESS			4	BRASS	Contact area : Gold 0.2μm min					
2	PBT	BLACK	UL94V-0			Dip area : TIN-Plating 2μm min					
1	PBT	BLACK	UL94V-0			Under plating : Nickel 2.5μm min					
NO.		MATERIAL		FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS			
UNITS mm				SCALE 2 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-F-00005911		DESIGNED AK. IWAHORI	CHECKED HT. YAMAGUCHI	DATE 20200305
 HIROSE ELECTRIC CO., LTD.				APPROVED : HT. YAMAGUCHI		20181211		DRAWING NO. EDC-080826-63-00			
				CHECKED : HT. YAMAGUCHI		20181211		PART NO. HIF3BA-50PA-2.54WB(63)			
				DESIGNED : MT. ITANO		20181211		CODE NO. CL610-1511-1-63			
				DRAWN : MK. OKI		20181207					
										 1/1	