

K12S

High Performance SMT Key Switches

NEW!

Features/Benefits

- Harsh environment applications - IP67
- Compatible with SMT lead free soldering process
- Illuminated
- Excellent tactile feel
- High reliability / long life
- DPST and detect versions available
- RoHS compliant

Typical Applications

- Automotive
- Off-road transportation
- Industrial
- Medical
- Network



Construction:

FUNCTION: Momentary
CONTACT ARRANGEMENT: SPST or DPST
CONTACT TYPE: NO or NC
TERMINALS: SMT

Mechanical

TOTAL TRAVEL: 1,5 mm
OPERATING FORCE: 1,5N; 5N; 9N & 15N
SEALING: IP40 or IP67

Packaging

Reels of 300 pieces

Electrical

SWITCHING POWER MIN./MAX.: 0.02mW/3 W DC
SWITCHING VOLTAGE MIN./MAX.: 2 V / 30 V DC
SWITCHING CURRENT MIN./MAX.: 10 μ A / 100 mA DC
DIELECTRIC STRENGTH: > 300 V RMS
OPERATING LIFE: > 10⁶ operations (F<5N) / 10⁵ operations (F $\geq$ 5N)
CONTACT RESISTANCE: Initial < 100m Ω - After test < 250m Ω
INSULATION RESISTANCE: >10⁹ Ω
BOUNCE TIME: < 10 ms

Environmental

OPERATING TEMPERATURE: -40°C to 85°C.
STORAGE TEMPERATURE: -40°C to 95°C.
RoHS compliant and Halogen free.

Process

SOLDERABILITY: Lead free soldering compatible.

How To Order

Our easy build-a-switch concept allows you to mix and match options to create the switch you need. To order, select desired option from each category and place it in the appropriate box.

K **1** **2** **S** **1** **.** **5** **N** **L** **F** **T**

Sub-Series

- A** IP40 with peg
- B** IP67 with peg
- C** IP40 without peg
- D** IP67 without peg

Option

- S** SPST version
- L** LED version (SPST)
- D** DPST version

LED Color

- NONE** No LED
- YE0** Yellow
- RD0** Red
- GN0** Green
- OR0** Orange
- WH0** White
- BU0** Blue

Operating Force

- 1.5N** 1.5 N (detect version)
- 5N⁽¹⁾** 5 N
- 9N** 9 N
- 15N⁽¹⁾** 15 N

Contact Arrangement

- O** Normally open (SPST)
- C** Normally closed (SPST)
- OO** 2 Normally open (DPST)
- CC** 2 Normally closed (DPST)
- OC⁽¹⁾** 1 Normally open
1 Normally closed (DPST)

LFT

Lead free, RoHS terminals tin plated

Travel

1.5 1.5 mm

⁽¹⁾ Please contact Technical Support for this configuration using the "Ask a Specialist" option on the K12S product web page.



D

Key Switches








30 Apr 12

NEW!


K12S

High Performance SMT Key Switches

K12SA/K12SC IP40 with peg / IP40 without peg


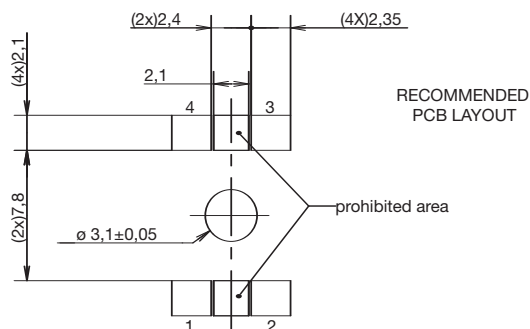





Without Peg




With Peg

K12SB / K12SD IP67 with peg / IP67 without peg

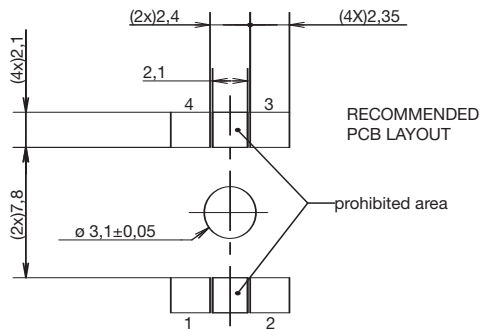

Without Peg



With Peg



First Angle
Projection

Dimensions are shown: mm
Specifications and dimensions subject to change

K12S

High Performance SMT Key Switches

NEW!

OPTION

S SPST version

L LED version

D DPST version

Single NO







Single NC

Single NO
+ LED

Single NC
+ LED

Double NO

Double NC



LED COLOR

OPTION CODE	LED COLOR
	No LED
YE0	Yellow
RD0	Red
GN0	Green
OR0	Orange
WH0	White
BU0	Blue

TRAVEL

1.5 1.5 mm

OPERATING FORCE

OPTION CODE	OPERATING FORCE
1.5N	1.5N (detect version) 150g without snap point
5N⁽¹⁾	5N, 500g
9N	9N, 900g
15N⁽¹⁾	15N, 1500g

CONTACT ARRANGEMENT

- O** Normally open (SPST and LED versions)
- C** Normally closed (SPST and LED versions)
- OO** 2 Normally open (DPST version)

- CC** 2 Normally closed (DPST version)
- OC⁽¹⁾** 1 Normally open/ 1 Normally closed (DPST)

⁽¹⁾ Please contact Technical support for this configuration using the "Ask a Specialist" option on the K12S product web page.

TAPE AND REEL

