




Copyright FCI.

C

D

REV F - 2006-04-17

PC card drilling dimensions(after plating)
(thickness 1.60±0.20mm)

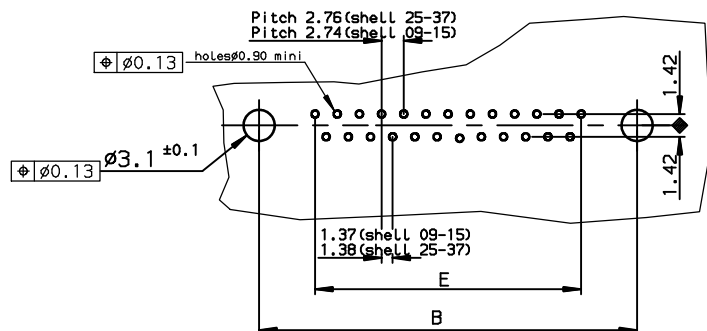

rev	ecn no	dr	date
E	-	ATC	2000/12/28
F	LS05-001	MPE	2005/03/10
G	LS05-0056	MPE	2005/06/28
H	LS06-0097	LGO	2006/07/29
-	-	-	-
-	-	-	-
-	-	-	-

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS: SEE DRAWING C01-8646-0000

www.fciconnect.com			surface ISO 1302	tolerance std ISO 406 ISO 1101	projection mm	size Scale A3 2	
TOLERANCES UNLESS OTHERWISE SPECIFIED			ANGULAR	LINEAR	0.X ±0.1 0.XX ±0.1 0.XXX ±0.1	ECN LS06-0097	
Dr	PESSON	1994/06/30	Product family		D-SUB	Spec ref -	
Eng	PESSON	1994/06/30	Product family		D-SUB	Spec ref -	
Chr	LEGARE	1994/06/30	Product family		D-SUB	Spec ref -	
Appr	LEGARE	1994/06/30	Product family		D-SUB	Spec ref -	
FCI			title FEMALE CONNECTOR FOR FOOT STRAIGHT SOLDER TYPE FOR		catag no	C01-8646-0212	
						Rev. H	
						CUSTOMER sheet 1 of 1	

A

B


C

D

2

3

4

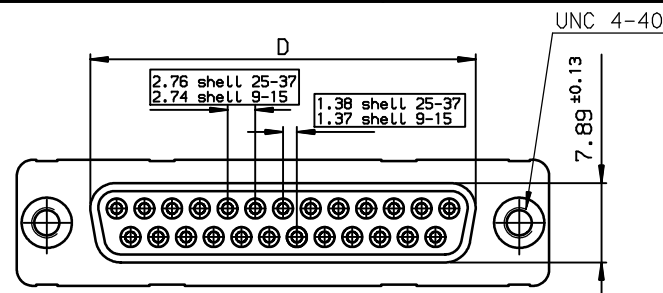

TIN LEAD PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER		
09	30.81	24.99	16.96	16.21	10.96	D09S34A4GV00	D09S34A5GV00	D09S34A6GV00
15	39.14	33.32	25.18	24.54	19.18	D15S34A4GV00	D15S34A5GV00	D15S34A6GV00
25	53.03	47.04	39.12	38.25	33.12	D25S34A4GV00	D25S34A5GV00	D25S34A6GV00
37	69.32	63.50	55.68	54.71	49.68	D37S34A4GV00	D37S34A5GV00	D37S34A6GV00
Gold flash						0,40 µ gold	0,76 µ gold	0,76 µ gold

LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER		
09	30.81	24.99	16.96	16.21	10.96	D09S34A4GV00LF	D09S34A5GV00LF	D09S34A6GV00LF
15	39.14	33.32	25.18	24.54	19.18	D15S34A4GV00LF	D15S34A5GV00LF	D15S34A6GV00LF
25	53.03	47.04	39.12	38.25	33.12	D25S34A4GV00LF	D25S34A5GV00LF	D25S34A6GV00LF
37	69.32	63.50	55.68	54.71	49.68	D37S34A4GV00LF	D37S34A5GV00LF	D37S34A6GV00LF
Gold flash						0,40 µ gold	0,76 µ gold	0,76 µ gold

European Views

PDM: Rev:H

STATUS:Released

Printed: Jan 18, 2011