


225 Watt Industrial

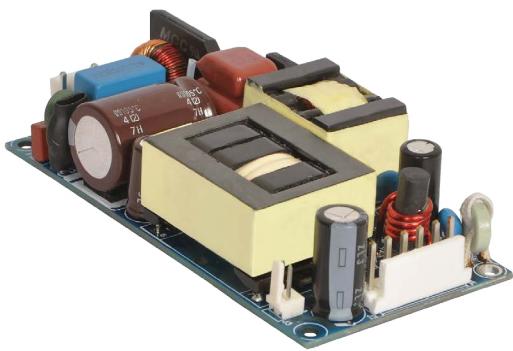

Features

- 4 x 2 x 1 Inches Form factor
- 225 Watts with Forced Air Cooling
- Efficiencies upto 94%
- -40 to 70 degree operating temperature*
- 12V / 0.5A Fan Output, Thermal Shut-Down feature
- 3.37m Hours, Telcordia -SR332-issue 3 MTBF
- Standby Power < 0.5W

Electrical Specifications

Input Voltage	85-264 VAC/390 VDC, Universal (Derate from 100% at 100V AC to 95% at 85V AC)
Input Frequency	47-63 Hz
Input Current	115 VAC: 2.2 A max. 230 VAC: 1.1 A max.
No Load Power	less than 0.5W typical
Inrush Current	115 VAC – 25 A, 230 VAC – 45 A, 264 VAC – 75 A
Leakage Current	300 uA Typical, (N.A. For Class II Option) Touch current <100uA
Efficiency	94%(48V), 93%(24V,30V), 92%(12V,15V)
Hold-up Time	at 225W:10 ms ; 110W: 16 ms
Power Factor	exceeds 0.95 with Full Load
Output Power	225W with 13 CFM, upto 120W Convection
Line Regulation	+/-0.5%
Load Regulation	+/-0.5%
Transient Response	25% step load change, at 0.1A/uS slew rate, 50% duty cycle, 50Hz=4% , recovery time < 5 ms
Rise Time	55ms typical
Set Point Tolerance	+/-1%
Over Current Protection	>110%
Over Voltage Protection	110 to 140%
Short Circuit Protection	Hiccup mode
Switching Frequency	PFC – 70 to 130 KHz ,PWM – 50-80 KHz
Operating Temperature ⁷	-40 to +70°C
Storage Temperature	-40 to +85°C
Relative Humidity	5% to 95%, noncondensing
Altitude	Operating: 16,000 ft.; Nonoperating: 40,000 ft.
MTBF	3.37m Hours, Telcordia -SR332-issue 3
Isolation Voltage	Input to Output – 3000V AC for ITE application Input to GND - 1500 VAC (Not Applicable For Class II Option)
Cooling	225W with 13 CFM forced air cooling ⁶ (refer Mechanical Drawing) upto 120 W with natural convection cooling ⁶ (refer Derating Curve)

Model Number	Description	Voltage	Max. Load (Convection) (112.5W)	Max. Load (Convection) (120W)	Max. Load (13 CFM)	Min. Load	Ripple ¹
LFWLP225-1001	with Screw Terminal	12 V	9.37A	10.0A	18.75A	0.0 A	1%
LFWLP225-1301	with Molex Connector	12 V	9.37A	10.0A	18.75A	0.0 A	1%
LFWLP225-1002	with Screw Terminal	15 V	7.5A	8.0A	15A	0.0 A	1%
LFWLP225-1302	with Molex Connector	15 V	7.5A	8.0A	15A	0.0 A	1%
LFWLP225-1003	with Screw Terminal	24 V	4.68A	5.0A	9.37A	0.0 A	1%
LFWLP225-1303	with Molex Connector	24 V	4.68A	5.0A	9.37A	0.0 A	1%
LFWLP225-1004	with Screw Terminal	48 V	2.34A	2.5A	4.68A	0.0 A	1%
LFWLP225-1304	with Molex Connector	48 V	2.34A	2.5A	4.68A	0.0 A	1%
LFWLP225-1005	with Screw Terminal	30 V	3.75A	4.0A	7.5A	0.0 A	1%
LFWLP225-1305	with Molex Connector	30 V	3.75A	4.0A	7.5A	0.0 A	1%
LFWLP225-1006	with Screw Terminal	58 V	1.94A	2.07A	3.88A	0.0 A	1%
LFWLP225-1306	with Molex Connector	58 V	1.94A	2.07A	3.88A	0.0 A	1%
LFWLP225-CK metal cover kit accessory							

Connectors		
J1	Pin 1	AC LINE
	Pin 2	NOT FITTED
	Pin 3	AC NEUTRAL
J2 Option 1 & 2	Pin 1,2,3	V1 +VE
	Pin 4,5,6	V1 -VE
J3	Pin 1	FAN +VE
	Pin 2	FAN -VE

Notes

1. Ripple is peak to peak with 20 MHz bandwidth and 10 μ F (Tantalum capacitor) in parallel with a 0.1 μ F capacitor at rated line voltage and load ranges.
2. Class II means without input Earth pin. Ensure non-metallic mounting stud when installing a class II product. Please add suffix -II to the model number to order a class II version of the same product. For eg WLP225-1001-II will be a class II version of 12V.
3. Combined output power of main output, fan supply shall not exceed max. Power rating.
4. Fan supply output voltage tolerance including set point accuracy, line and load regulation is +/-10% and Ripple and noise is less than 10%.
5. Specifications are for nominal input voltage, 25°C unless otherwise stated.
6. 225W with 13CFM forced air cooling and 120W with natural convection cooling at 100 to 264VAC.
7. -40 to 0°C startup is guaranteed with spec deviation in output ripple and voltage regulation.

Mechanical Specifications

AC Input Connector (J1)	Molex: 26-60-4030 Mating: 09-50-3031; Pins: 08-50-0106
DC Output Connector (J2) Option 1 (Screw Terminal)	Molex: 39357 Series or equivalent
DC Output Connector (J2) Option 2 (Molex Connector)	Molex: 26-60-4060 Mating: 09-50-3061; Pins: 08-50-0106
Aux (Fan) Output(J3)	AMP:640456-2 Mating: 640440-2
Dimensions	4 x 2 x 1 inches (101.60 x 50.8x 25.4 mm)
Weight	200 gm approx

EMC


CE Mark	Complies with LVD Directive
Conducted Emissions	EN55022-B, CISPR22-B, FCC PART15-B
Static Discharge	EN61000-4-2, Level-3
RF Field Susceptibility	EN61000-4-3, Level-3
Fast Transients/Bursts	EN61000-4-4, Level-3
Radiated Emissions	Level A radiated, Level B radiated with external core (King core K5B RC 25x12x15-M in input cable (5 turns))
Surge Susceptibility	EN61000-4-5, Level-3
Harmonic Current	EN61000-3-2, Class D

Safety


Safety Standard(s)	EN60950-1, IEC60950-1 (ed.2), UL 60950 (ed.2), CSA C22.2 No.60950-1 (ed.2), Class1 SELV , GB4943. 1-2011 ; GB9254-2008 ; GB17625. 1-2012
Approval Agency	Nemko, UL, C-UL , CCC
Safety File Number(s)	Class-I : Nemko: Certificate No. P14219072, IEC Ref. Certif. No.:N083507 Class-II : Nemko: Certificate No. P14219134, IEC Ref. Certif. No.N083790 UL: Certificate Number 20141217-E150565

Efficiency Graph


WLP225-100X efficiency graph at 115V AC

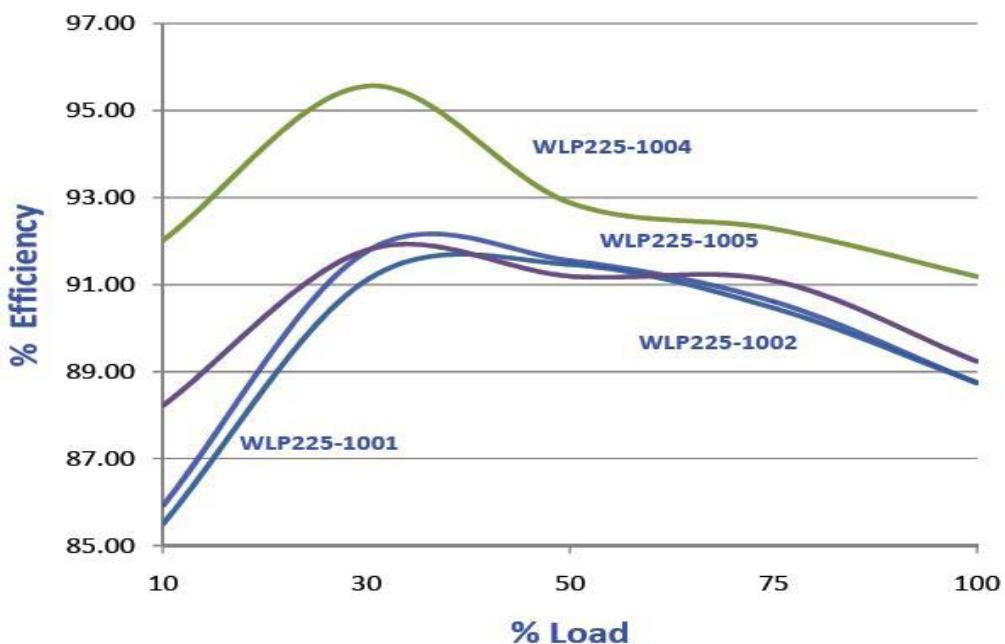

WLP225-100X efficiency graph at 230V AC

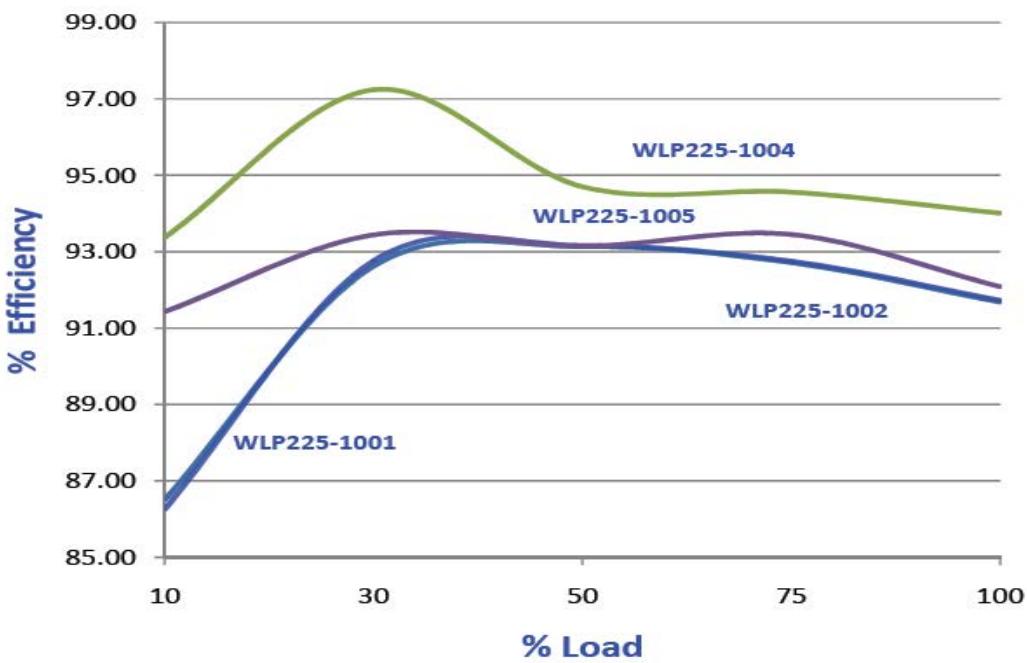


Derating Curve

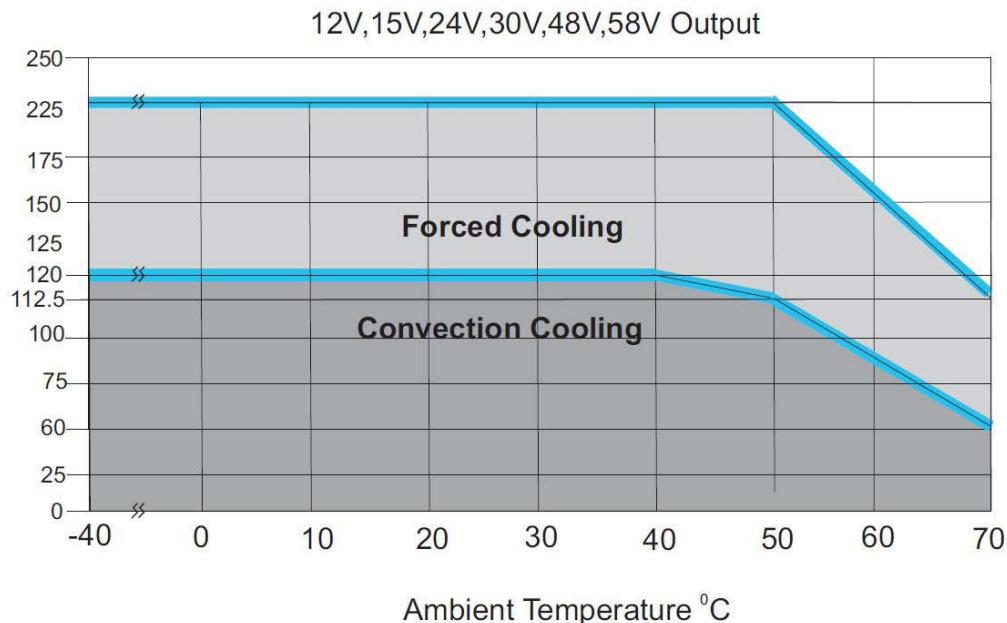

Mechanical Drawing

Option 1

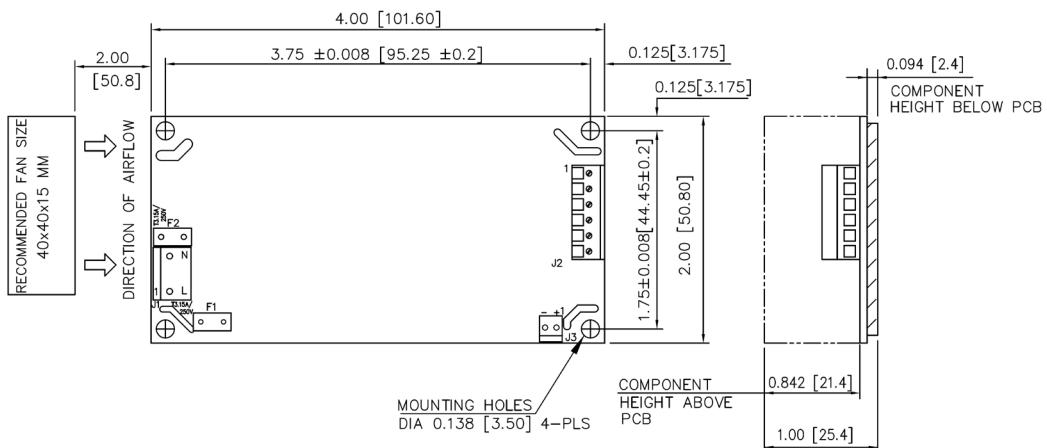


MECHANICAL OUTLINE DIMENSIONS
ALL DIMENSIONS ARE IN INCHES[MM]
GEN TOLERANCE : $+\/-0.04$ [$+\/-1.0\text{MM}$]

Notes: In case the PCB is mounted in a metal enclosure, using metal hardware ensure the following

1. Stand off, used to mount PCB has OD of 5.4 mm max.
2. Screws, used to fix PCB on stand off, have head dia of 6.0 mm max.
3. Washer, if used, to have dia of 6.5 mm max.

Mechanical Drawing

Option 2

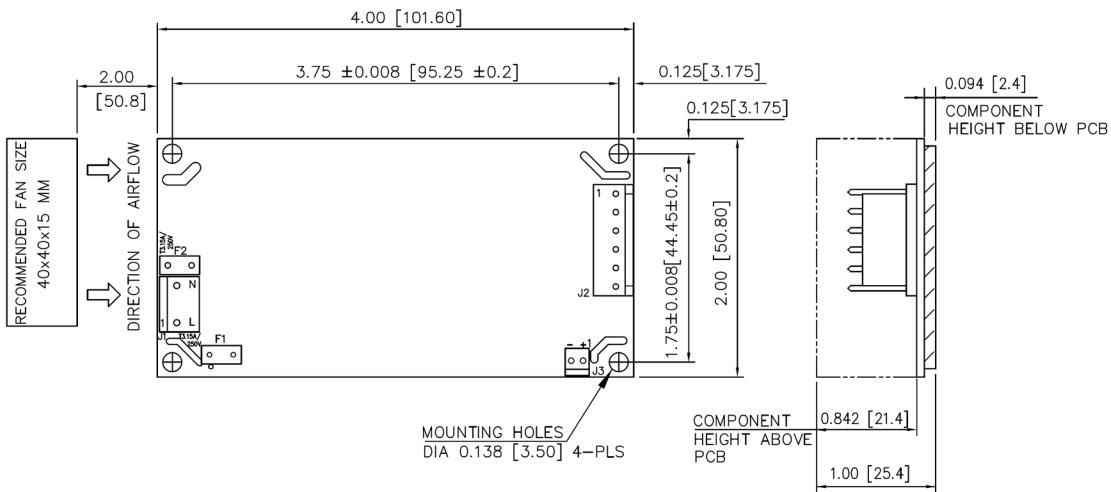

MECHANICAL OUTLINE DIMENSIONS
ALL DIMENSIONS ARE IN INCHES[MM]
GEN TOLERANCE : $+-0.04$ [$+-1.0MM$]

Notes: In case the PCB is mounted in a metal enclosure, using metal hardware ensure the following

1. Stand off, used to mount PCB has OD of 5.4 mm max.
2. Screws, used to fix PCB on stand off, have head dia of 6.0 mm max.
3. Washer, if used, to have dia of 6.5 mm max.