
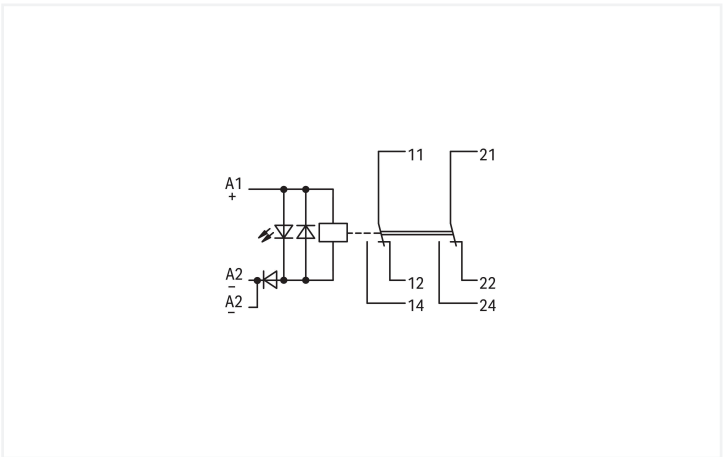


Data Sheet | Item Number: 288-437

Relay module with driven contacts; Nominal input voltage: 24 VDC; 2 changeover contacts; Limiting continuous current: 5 A; Module width: 19 mm; 2,50 mm²

<https://www.wago.com/288-437>

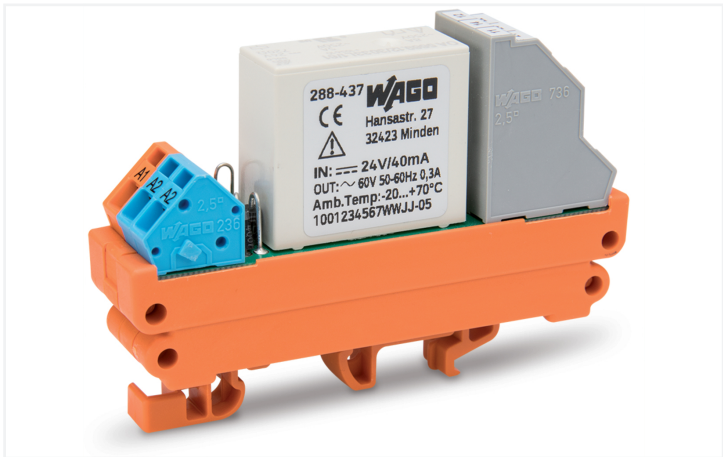

Notes	
Safety Information	Notice! Accessible live parts! Protection against accidental contact must be provided by the system installer, e.g., using a WAGO 709 Series Cover (see "Accessories") or a similar cover. The installation guidelines must be followed for each specific application.
Note	60 VDC switching voltages and 300 mA currents must not be exceeded for gold-plated basic relays. Higher switching power eventually evaporates the gold layer.

Technical data	
Control circuit	
Nominal input voltage U _N	24 VDC
Input voltage range	-15 ... +10 %
Nominal input current at U _N	36 mA
Load circuit	
Number of changeover/switchover contacts	2
Contact material (relay)	AgNi 10 + Au
Limiting continuous current	5 A
Switching Voltage, Max.	250 VAC
Switching power (resistive) max.	AC 1250 VA
Utilization category	AC-15: 3 A / 250 VAC DC-13: 2 A / 24 VDC
Recommended minimum load	0.1 V / 1 mA / 1 mW
Pull-in time (typ.)	15 ms
Drop-out time (typ.)	12 ms
Electrical life (NO; resistive load; 23 °C)	100 x 10 ³ switching operations
Mechanical life	50 x 10 ⁶ switching operations



Safety and protection		
Rated Voltage		250 V
Overvoltage category		II
Pollution degree		2
Dielectric strength (control/load circuit) (AC, 1 min)		3 kVrms
Dielectric strength (open contact) (AC, 1 min)		1.5 kVrms
Dielectric strength (load/load circuit) (AC, 1 min)		3 kVrms
Insulation type (control/load circuit)		Reinforced insulation (safe isolation)
Insulation type (load/load circuit)		Functional insulation
Insulation type (adjacent devices)		Basic insulation
Safety Information		Notice! Accessible live parts! Protection against accidental contact must be provided by the system installer, e.g., using a WAGO 709 Series Cover (see "Accessories") or a similar cover. The installation guidelines must be followed for each specific application.
Protection type		IP00

Connection Data		
Connection technology		CAGE CLAMP®
Solid conductor		0.08 ... 2.5 mm ² / 28 ... 12 AWG
Fine-stranded conductor		0.08 ... 2.5 mm ² / 28 ... 12 AWG
Strip length		5 ... 6 mm / 0.2 ... 0.24 inches

Physical data		
Width		19 mm / 0.748 inches
Height		75 mm / 2.953 inches
Depth from upper-edge of DIN-rail		38 mm / 1.496 inches

Mechanical data		
Mounting type		DIN-35 rail

Material data		
Note (material data)		Information on material specifications can be found here
Fire load		0.286 MJ
Weight		44.3 g

Environmental requirements		
Ambient temperature (operation at U _N)		-25 ... +70 °C
Ambient temperature (storage)		-40 ... +70 °C
Processing temperature		-25 ... +50 °C
Relative humidity		5 ... 95 %
Operating altitude (max.)		2000 m

Standards and Specifications		
Standards/specifications		EN 61010-2-201 EN 61810-3



Commercial data	
Product Group	6 (INTERFACE ELECTRONIC)
PU (SPU)	10 (1) pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454560133
Customs tariff number	85364900990

Product Classification	
UNSPSC	39122334
eCl@ss 10.0	27-37-16-01
eCl@ss 9.0	27-37-16-01
ETIM 9.0	EC001437
ETIM 10.0	EC001437
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
CAS-No.	7439-92-1 79-94-7
REACH Candidate List Substance	2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	7(a)
SCIP notification number (Austria)	4f82388f-a65a-4d13-bed8-8c5d7aca36d6
SCIP notification number (Belgium)	d6add5fa-15fe-4e7b-90bc-154b269f7afd
SCIP notification number (Bulgaria)	6433260f-b4ad-4437-8111-318c72a09ca8
SCIP notification number (Czech Republic)	5c0a9576-65c0-4b60-92b2-f7d40668c96f
SCIP notification number (Denmark)	c6050073-ce3f-492b-814d-75c62100d0d9
SCIP notification number (Finland)	91b5fc7b-98f3-4fb4-a20e-768c52505601
SCIP notification number (France)	a08ee6e6-7857-43cf-8588-6d80932aa743
SCIP notification number (Germany)	2de327f7-ce61-4b76-8e7d-488e95226e5c
SCIP notification number (Hungary)	a4958121-85c7-448c-9745-59f0ed50fb63
SCIP notification number (Italy)	06be5fd8-52fd-417f-8c7e-3e2ca18327c7
SCIP notification number (Netherlands)	24ca02ec-87bc-4e55-8223-f9ef43ccb5b5
SCIP notification number (Poland)	e823142b-200a-43b3-92df-37bed738d061
SCIP notification number (Romania)	b25d3de8-f8bc-4f5e-a7cb-108f4266ae69
SCIP notification number (Sweden)	1102784f-6162-4ee4-8d06-31fade526e08

Approvals / Certificates		
General approvals		Declarations of conformity and manufacturer's declarations
		
Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 004/2011	EAC CoC 03080
Approval	Standard	Certificate Name
EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-
UK-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 288-437

↓

Documentation				
Bid Text				Instruction Leaflet
288-437	19.02.2019	xml 4.07 KB	↓	Relaismodul mit zwangs- geführten Kontakten V 1.0.0 pdf 797.03 KB ↓
288-437	20.02.2019	docx 16.09 KB	↓	

CAD/CAE-Data

CAE data

EPLAN Data Portal 288-437

↓

WSCAD Universe 288-437

↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Marking

1.1.1.1 Marking strip



Item No.: 709-196

Marking strips; for laser printer; translucent



Item No.: 709-177

Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; translucent



Item No.: 709-178

Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; white

1.1.2 Tool

1.1.2.1 Operating tool



Item No.: 210-720

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

Page 4/5


Version 29.06.2026

Continued on next page


Downloaded from [Arrow.com](https://www.arrow.com)

Installation Notes

Conductor termination




Conductor termination – screwdriver actuation parallel to conductor entry




Conductor termination – screwdriver actuation perpendicular to conductor entry

Installation



Snapping a module onto DIN-rail.



Removing a module from the DIN-rail.