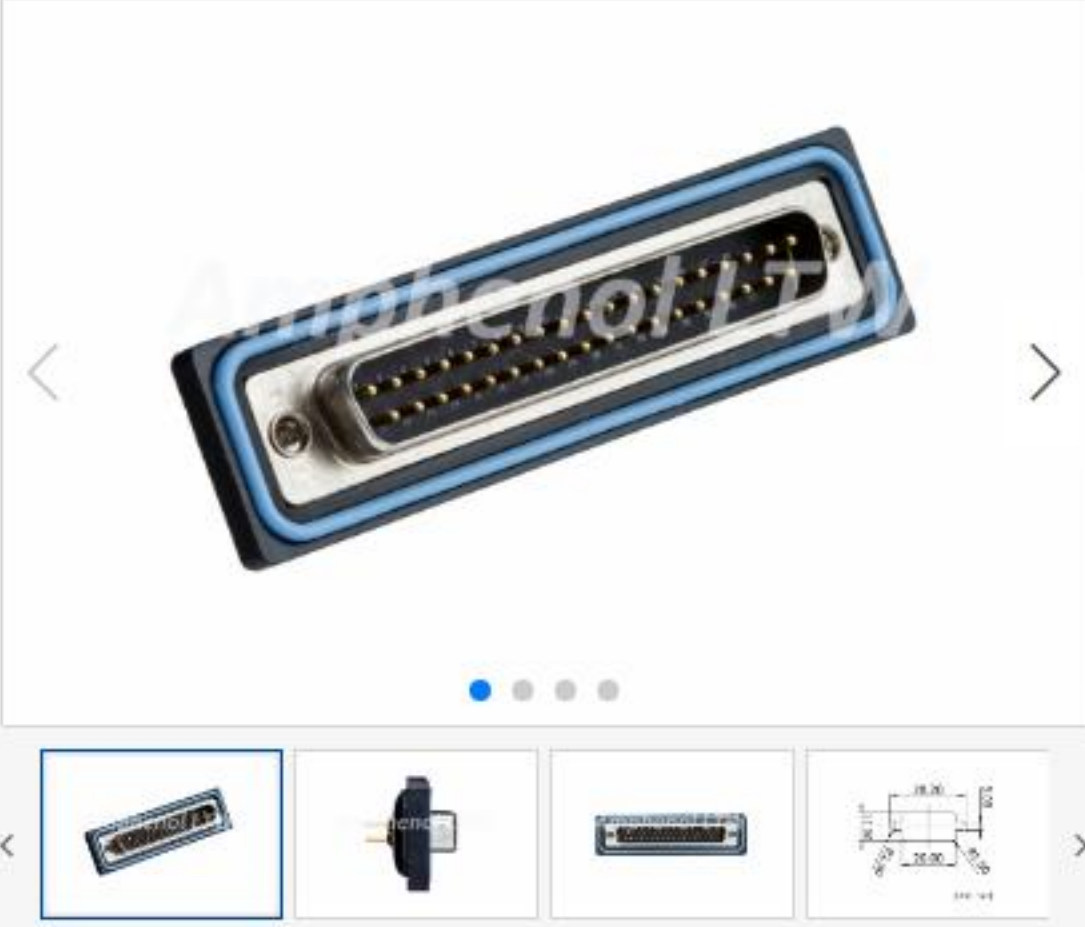


Product Line

- DeepTronica >
- Single Pair Ethernet >
- ZConnect >
- Ceres >
- X-Lok >
- M Series >
- FLOS & FLOS+ >
- Power >
- RBL >
- HS-Lok >
- NMEA 2000 >
- Heavy Duty Shielded >
- RJ >
- USB >
- SSL >
- HDMI >
- DVI >
- Fiber Optic >
- RF >
- Cable Joiner >
- Cable Gland >
- Pressure Relief Vent >
- LED Light Guide >
- D-Sub >
- Standard**
- High Density
- Accessory
- ALTW Emporium >




SDB-37PMMP-SL7001

Operating Temperature: -40°C ~ +105°C
Transmission Speed: N/A
Shielded: Metal, Shielded
Jacket Material: N/A
Certificate: N/A

You must login first for view the price

Quantity - 1 +

Can't find? [Customize your part](#)

Mating Pair & Accessories

Connector Type ▼ Search



D-Sub, Standard...
SDB-37AFFM-...
-20°C ~ +80°C

- 0 +

☐



D-Sub, Standard...
SDB-37AFFM-...
-20°C ~ +80°C

- 0 +

☐



D-Sub, Standard...
SDB-37AFFM-...
-20°C ~ +80°C

- 0 +

☐



D-Sub, Standard...
SDB-37AFFM-...
-20°C ~ +80°C

- 0 +

☐



D-Sub, Standard...
SDB-37AFFM-...
-20°C ~ +80°C

- 0 +



☐



D-Sub, Standard...
SDB-37AFFM-...
-20°C ~ +80°C

- 0 +

☐

Specifications	Download / CAD
Nominal Current 5A	Connector Type Receptacle
Shielded Metal, Shielded	No. of Contacts 37
Connector Gender Male	Backshell Straight Without Board Lock
Mating Style Screw Thread	IP Rating IP67
Assembly Style PCB 180°	
	

People Also Bought



SDB-37PMMP-SL7001



BB-02AFFM-LR7A04



CAP-WD2CSPA1



AB-BB03FL-BBHL-...



M12A08ML-12AMR-...