
Hermetic Infrared Diode

OP130 Series



"W"

Features:

- TO-46 hermetically sealed package
- Focused and non-focused optical light pattern
- Enhanced temperature range
- Mechanically and spectrally matched to other OPTEK devices
- Choice of power ranges
- Choice of narrow or wide irradiance pattern

Description:

Each **OP130** series device is a 935 nm gallium arsenide (GaAs) infrared LED mounted in a hermetically sealed TO-46 package that provides an enhanced temperature range with a variety of power ranges. The TO-46 housing also offers high power dissipation and superior protection for hostile environments.

Each **OP130** device has a narrow beam with an inclusive angle at half power points of 18°. Each **OP130W** series device has a broad irradiance pattern of 50° at half power points, providing relatively even illumination over a large area. These devices are designed to efficiently operate with OP800, OP593, OP598 and OP599 phototransistors or the OP830 photodarlington.

Please refer to Application Bulletin 210 for additional thermal design information.

Custom electrical, wire and cabling and connectors are available. Contact your local representative or OPTEK for more information.

Applications:

- Non-contact reflective object sensor
- Assembly line automation
- Machine automation
- Machine safety
- End of travel sensor
- Door sensor

Ordering Information

Part Number	LED Peak Wavelength	Output Power (mW/cm²) Min / Max	Lens Type	Total Beam Angle	Lead Length (Min)
OP130	935 nm	1.0 / NA	Dome	18°	0.50"
OP131		3.0 / NA			
OP132		4.0 / NA			
OP133		5.0 / NA			
OP130W		1.0 / NA	Flat	50°	
OP133W		5.0 / NA			

RoHS


General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT Electronics plc

Downloaded from Arrow.com.

Electrical Specifications


OP130, OP131, OP132, OP133

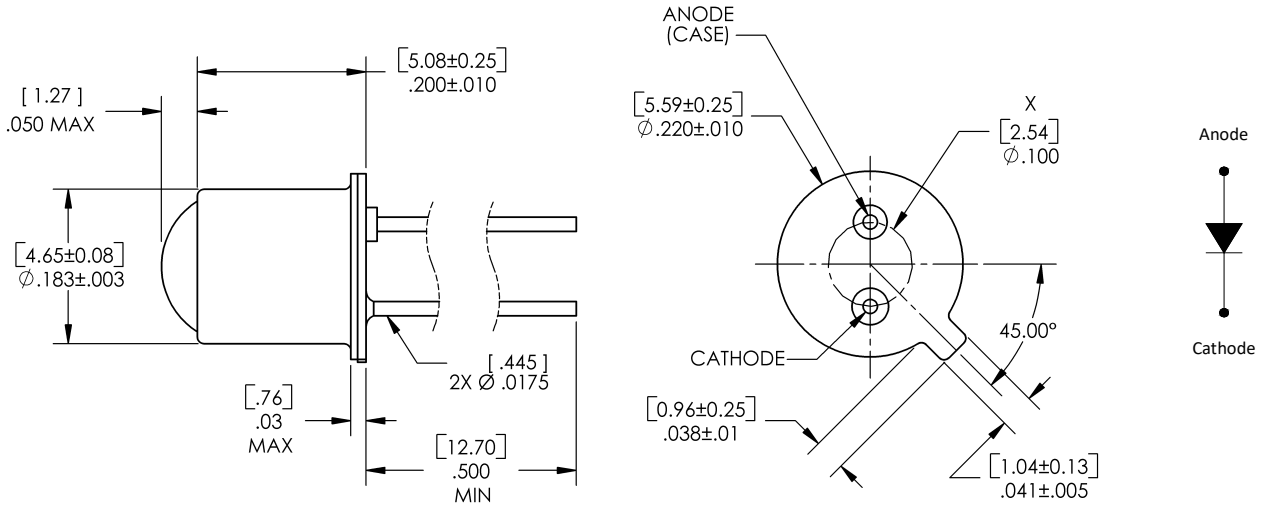

X THIS DIMENSION CONTROLLED AT HOUSING SURFACE.

DIMENSIONS ARE IN: **[MILLIMETERS]**
INCHES

OP130W and OP133W

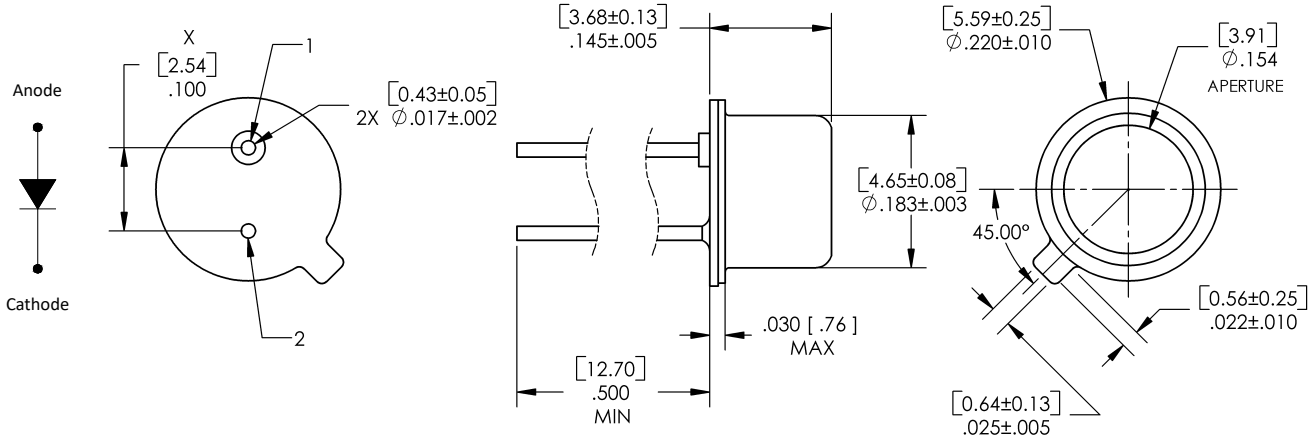

X THIS DIMENSION CONTROLLED AT HOUSING SURFACE.

DIMENSIONS ARE IN: **[MILLIMETERS]**
INCHES

Pin #	LED
1	Anode
2	Cathode

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT Electronics plc

Downloaded from Arrow.com.

Electrical Specifications

Absolute Maximum Ratings (T_A = 25° C unless otherwise noted)

Storage Temperature Range	-65° C to +150° C
Operating Temperature Range	-65° C to +125° C
Reverse Voltage	2.0 V
Continuous Forward Current	100 mA
Peak Forward Current (2 µs pulse width, 0.1% duty cycle)	10.0 A
Lead Soldering Temperature [1/16 inch (1.6 mm) from case for 5 seconds with soldering iron] (1)	260° C
Power Dissipation (2)	200 mW

Electrical Characteristics (T_A = 25° C unless otherwise noted)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
P_O (3)	Radiant Power Output OP130, OP130W OP131 OP132 OP133, OP133W	 1.0 3.0 4.0 5.0	 - - - -	 - - - -	mW	I_F = 100 mA
V_F (3)	Forward Voltage	1.0	-	1.75	V	I_F = 100 mA
I_R	Reverse Current	-	-	100	µA	V_R = 2.0 V
λ_P	Wavelength at Peak Emission	-	935	-	nm	I_F = 10 mA
β	Spectral Bandwidth between Half Power Points	-	80	-	nm	I_F = 10 mA
$\Delta\lambda_P/\Delta_T$	Spectral Shift with Temperature	-	+0.30	-	nm/° C	I_F = Constant
θ_{HP}	Emission Angle at Half Power Points OP130 series OP130W series	 - -	 18 50	 - -	Degree	I_F = 100 mA
t_r	Output Rise Time	-	1000	-	ns	$I_{F(PK)}$ = 100 mA, PW = 10 µs, and D.C. = 10.0%
t_f	Output Fall Time	-	500	-	ns	$I_{F(PK)}$ = 100 mA, PW = 10 µs, and D.C. = 10.0%

Notes:
(1) RMA flux is recommended. Duration can be extended to 10 seconds maximum when flow soldering.
(2) Derate linearly 1.8 mW/° C above 25° C.
(3) Measurement made with 100 µs pulse measured at the trailing edge of the pulse with a duty cycle of 0.1% and an I_F = 100 mA.

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


© TT Electronics plc

Downloaded from Arrow.com.


Typical Performance

OP130 Series (including "W" devices)


LED Forward Current vs Forward Voltage vs Temp

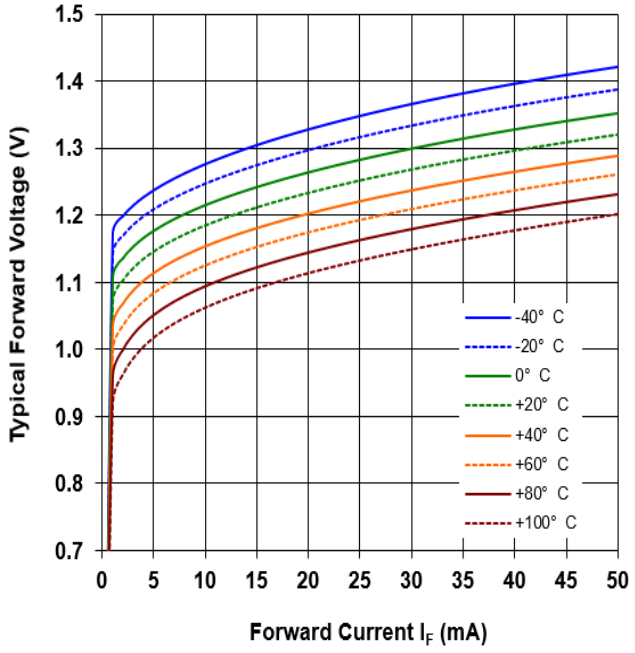


Optical Power vs I_F vs Temperature

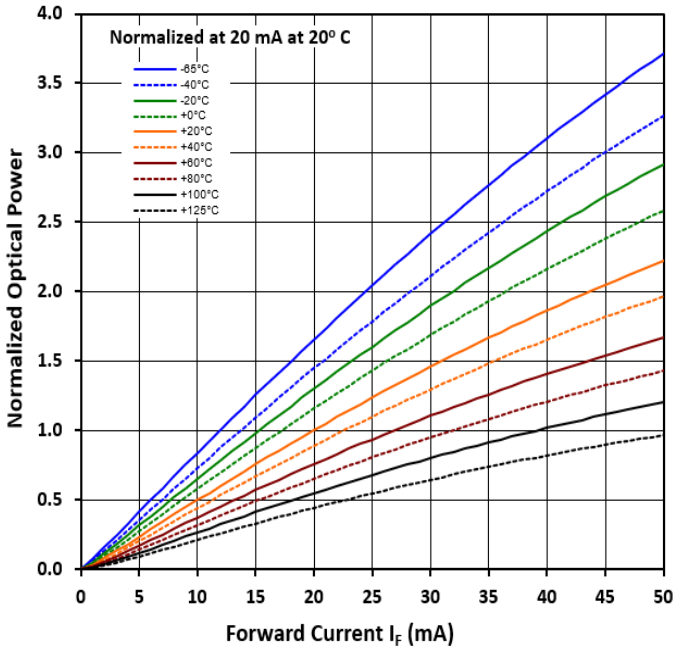

Distance vs Output Power vs I_F

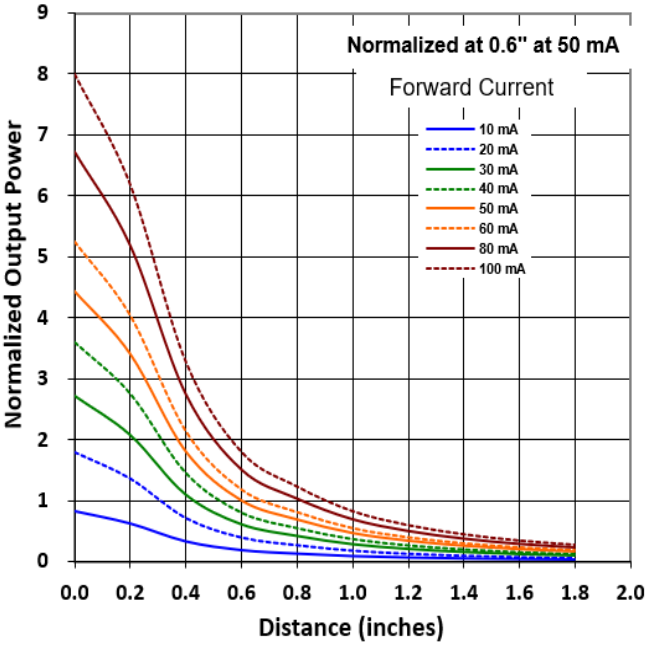

Radiant Intensity vs Angular Displacement

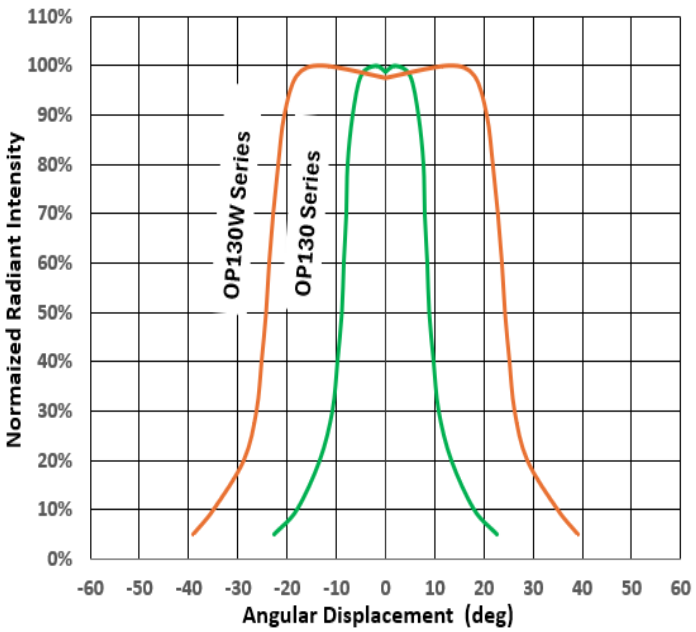


General Note


TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT Electronics plc

Downloaded from Arrow.com.

Typical Performance
OP130 Series (including "W" devices)

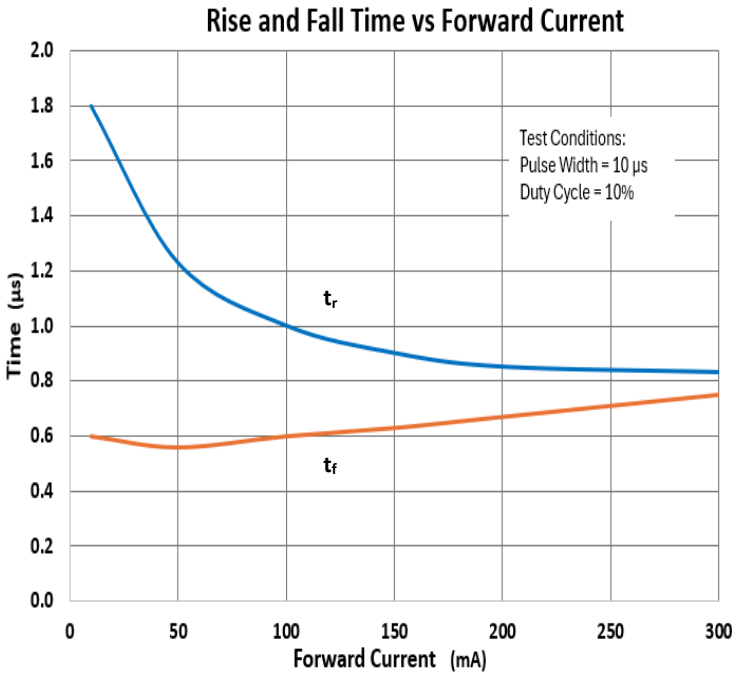

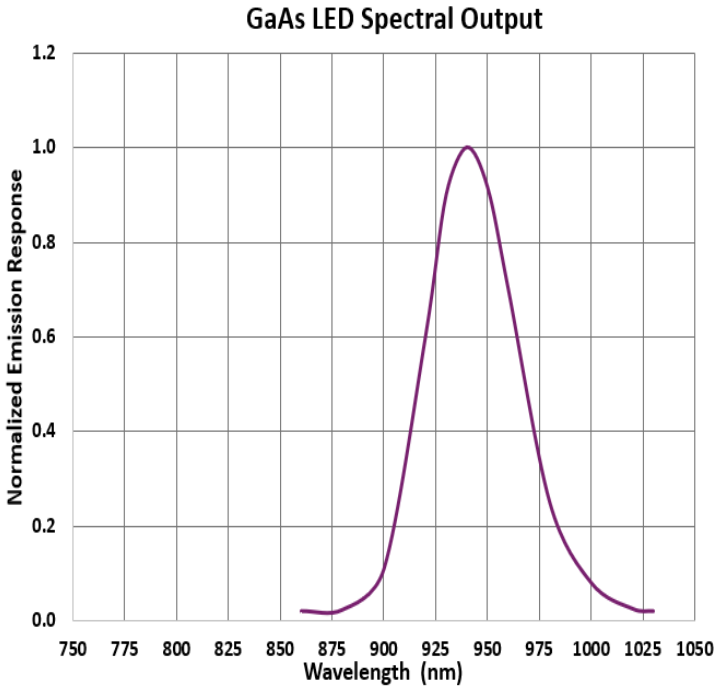

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT Electronics plc

Downloaded from Arrow.com.