





REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	P9	REVISED PER ECR-18-011787	10SEP2018	JB	DZ
	P10	REVISED PER ECN-20-100589	29OCT2020	WLS	VS
	P11	REVISED PER ECN-20-100715	30NOV2020	WLS	VS
	P12	REVISED PER ECN-23-210752	03MAY2023	WLS	VS

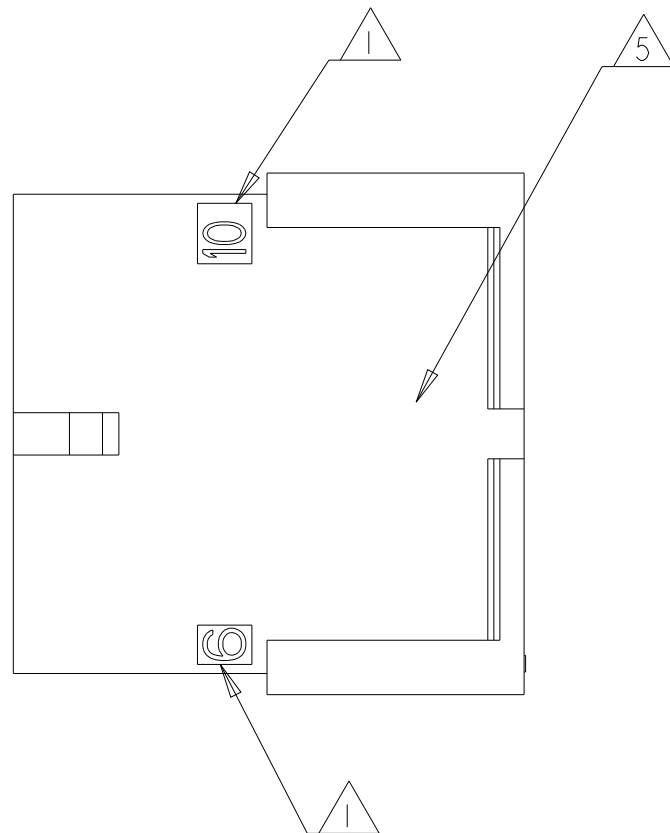


- ① CIRCUIT IDENTIFIERS LOCATED APPROXIMATELY AS SHOWN.
- ② MATERIAL PA66/6 UL94-V0.
- ③ MATERIAL PA66 UL94-V0, GWEPT 750°C AND GWFI 850°C, NO FLAME ACC. TO IEC 60335-1.
- ④ MATERIAL ID ">PA<" LOCATED IN APPROX AREA SHOWN, APPROX 0.01 HIGH.
- ⑤ CAVITY NUMBER IDENTIFICATION.

6 COUNTERPART RECOMMENDED IS PN 794617 (DASH ACC. TO NUMBER OF POSITION).

7 TERMINAL USED WITH THIS CONNECTOR CAN BE 794608 OR 794609 OR LOOSE PIECE
TERMINALS MAKE FROM THEM OR OTHER APPROVED BY PRODUCT ENGINEERING (TERMINAL
PN DEFINED ACC. TO WIRE SIZE AND DASH NUMBER ACC. TO FINISHING).

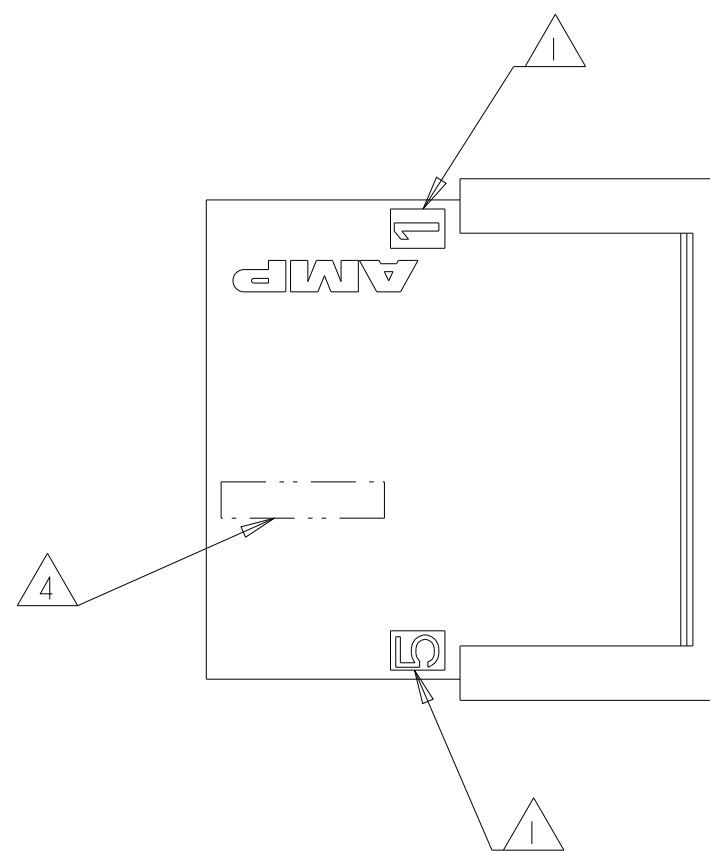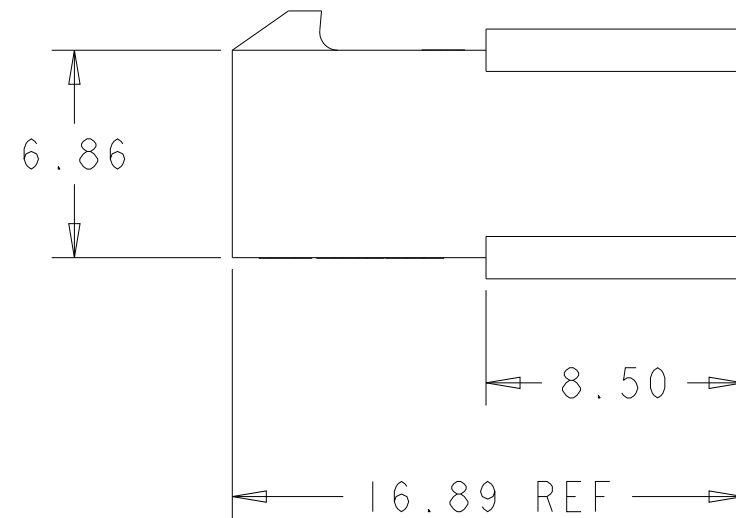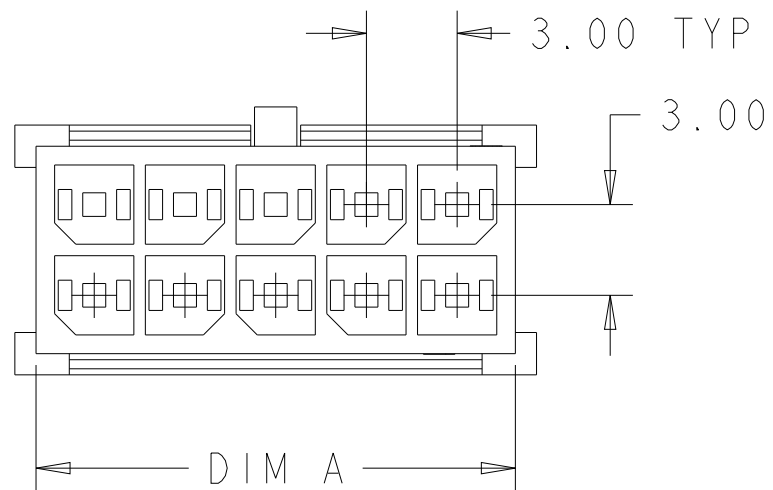

NATURAL		15.85	10	3-794616-0
		12.85	8	3-794616-8
		9.85	6	3-794616-6
BLACK		36.85	24	2-794616-4
		33.85	22	2-794616-2
		30.85	20	2-794616-0
		27.85	18	1-794616-8
		24.85	16	1-794616-6
		21.85	14	1-794616-4
		18.85	12	1-794616-2
		15.85	10	1-794616-0
		12.85	8	794616-8
		9.85	6	794616-6
		6.85	4	794616-4
		3.85	2	794616-2
COLOR	MATERIAL	DIM A	NO. OF POS.	PART NUMBER

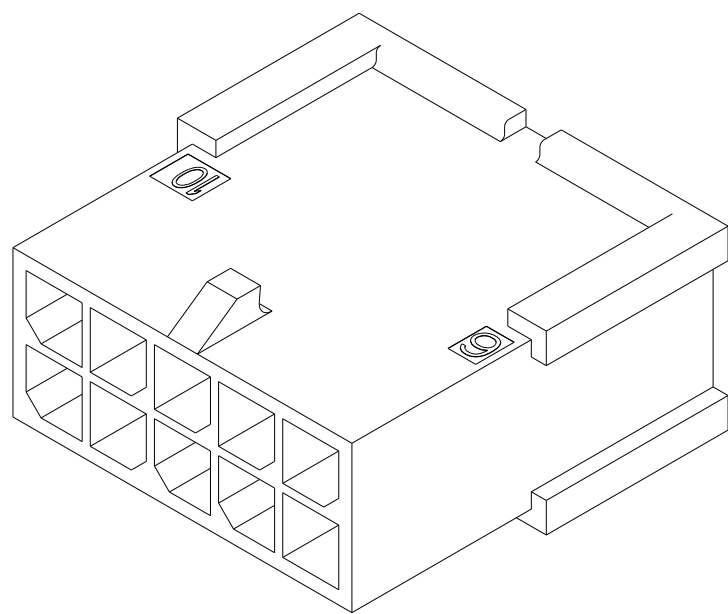

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN W J RUDY 29AUG2000 CHK W DAVIS 29AUG2000 APVD W DAVIS 29AUG2000		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ±0.26 4 PLC ± ANGLES ±1°		NAME PLUG HOUSING, 2 to 24 POSITION DUAL ROW, FREE HANGING, MICRO MATE-N-LOK(TM)	
		PRODUCT SPEC 108-1836 APPLICATION SPEC 114-13000			
MATERIAL SEE TABLE		FINISH - -			
		WEIGHT -		SIZE A2	
		CUSTOMER DRAWING		CAGE CODE 00779	
				DRAWING NO C=794616	
				RESTRICTED TO	
				SCALE 4:1	
				SHEET 1 of 2	
				REV P12	

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY -

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

2 POS.

14 POS.

4 POS.

16 POS.

6 POS.

18 POS.

8 POS.

20 POS.

10 POS.

22 POS.

12 POS.

24 POS.

KEYING BY POSITION SIZE

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±

1 PLC ±

2 PLC ±0.26

3 PLC ±

4 PLC ±

ANGLES ±°

FINISH -

DWN W J RUDY 29AUG2000

CHK W DAVIS 29AUG2000

APVD W DAVIS 29AUG2000

PRODUCT SPEC 108-1836

APPLICATION SPEC 114-13000

WEIGHT -

CUSTOMER DRAWING

NAME PLUG HOUSING, 2 to 24 POSITION
DUAL ROW, FREE HANGING,
MICRO MATE-N-LOK(TM)

SIZE A2

CAGE CODE 60779

DRAWING NO C-794616

RESTRICTED TO

SCALE 4:1

SHEET 2 OF 2

REV P 12

1471-9 (3/13)

Downloaded from [Arrow.com](#)