**INCH-POUND** 


MIL-DTL-28840/16D 14 November 2013 SUPERSEDING MIL-DTL-28840/16C 23 October 2009

## **DETAIL SPECIFICATION SHEET**

CONNECTORS, ELECTRICAL, CIRCULAR, THREADED, HIGH SHOCK, HIGH DENSITY, SHIPBOARD, CRIMP CONTACTS, PLUG, CLASSES D, DS, P, T, TS, Z, AND ZS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-28840.

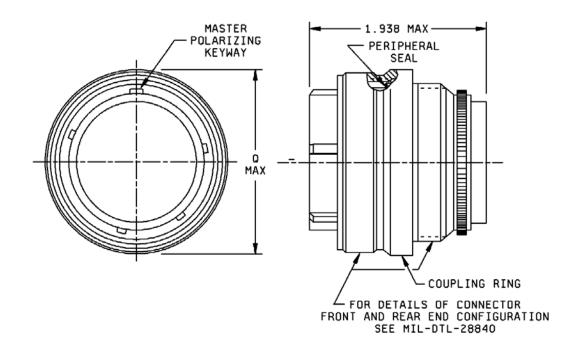

Inches mm 1.938 49.23

FIGURE 1. <u>Dimensions and configuration</u>.

AMSC N/A FSC 5935

## MIL-DTL-28840/16D

Shell size designator (See note 3)	Q dia max
A (11)	1.028 (26.11)
B (13)	1.141 (28.98)
C (15)	1.263 (32.08)
D (17)	1.387 (35.23)
E (19)	1.513 (38.43)
F (23)	1.703 (43.26)
G (25)	1.825 (46.36)
H (29)	2.143 (54.43)
J (33)	2.329 (59.16)

## NOTES:

- 1. Dimensions are in inches.
- 2. Metric equivalents are given for information only.
- 3. Shell sizes are provided within parentheses for information and are not a part of the designator.
- 4. Dimensions apply after plating.
- 5. Normal mating key position shown. Alternate key positions shall be in accordance with MIL-DTL-28840.

FIGURE 1. <u>Dimensions and configuration</u> – Continued.

### **REQUIREMENTS:**

Dimensions and configuration: See figure 1.

Classes: D, DS, P, T, TS, Z and ZS.

Insert arrangements: See the figure of MIL-STD-1698 corresponding to the desired shell size.

Contacts: Pin or socket, crimp type, styles P, S, D, E, F or G, in accordance with MIL-DTL-28840.

Shell polarization: 1 thru 6, key position.

Marking: Part or Identifying Number (PIN) on shell.


Mating counterpart: Receptacle connectors in accordance with MIL-DTL-28840/10, /11, /12, /14, /20,

and /21.

Installation and removal tools: In accordance with MIL-I-81969/33 and /34.

A backshell shall be used to meet the moisture and water pressure requirements.

# PIN example:

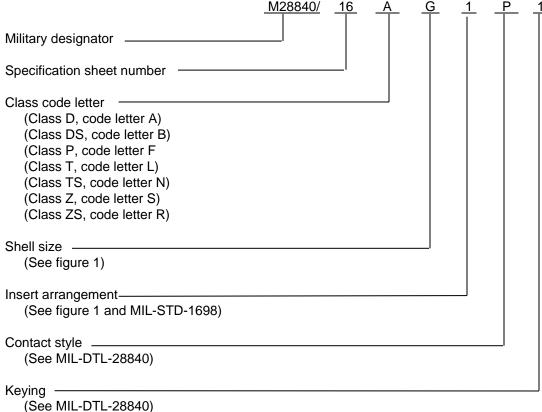

## **RESTRICTIONS:**

Classes D and DS are inactive for NAVSEA new design, unless approved by NAVSEA.

### MIL-DTL-28840/16D

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Referenced documents. In addition to MIL-DTL-28840, this document references the following:

MIL-DTL-28840/10 MIL-DTL-28840/11 MIL-DTL-28840/12 MIL-DTL-28840/20 MIL-DTL-28840/20 MIL-DTL-28840/21 MIL-I-81969/33 MIL-I-81969/34 MIL-STD-1698

### **CONCLUDING MATERIAL**

Custodians: Preparing activity:

Army - AT DLA - CC

Navy - EC

Air Force - 85

DLA - CC (Project 5935-2013-114)

Review activities:

Army - AV, MI

Air Force - 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <a href="https://assist.dla.mil">https://assist.dla.mil</a>.