
Downloaded from Arrow.com.

NSH NO.	M CODE	MADE FROM

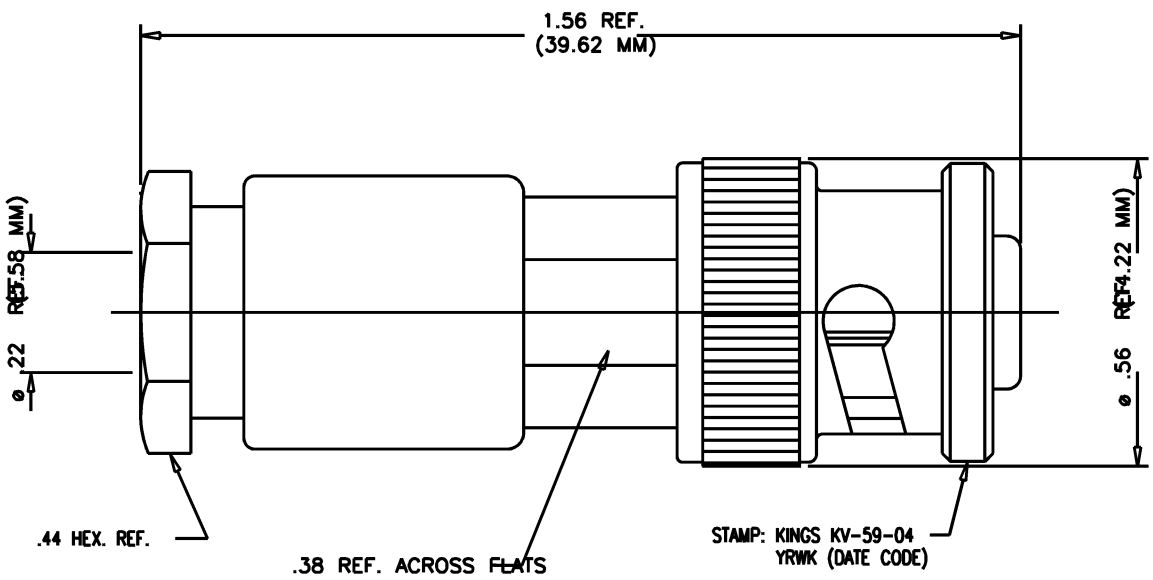

NOTES:
1. FOR USE WITH RG-58/U CABLE GROUP.
2. FOR CABLING INSTRUCTIONS SEE CP-1002
3. MATERIALS:
   INSULATOR: TEFLON, ASTM-D4894
   GASKET: SILICONE RUBBER, A-A-59588
   SPRING WASHER: BER. COP, ASTM-B-196
   ALL OTHER METAL PARTS: BRASS, ASTM-B-16
4. FINISHES:
   CENTER CONTACT: GOLD PLATE, ASTM-B488
   .000050 MIN. GOLD, .00050 MIN. NICKEL, COPPER STRIKE TYPE II, CLASS 1.25
   ALL METAL PARTS: SILVER PLATE, ASTM-B700
   .000200 TO .000300 SILVER, .00020 MIN. COPPER UNDERPLATE
5. ELECTRIAL CHARACTERISTICS:
   OPERATING VOLTAGE: 3500 VAC
   5000 VDC

UNLESS OTHERWISE SPECIFIED
1. ALL DIMENSIONS IN INCHES [MILLIMETERS].
2. TOLERANCES:
   .XXX ±.004 .XX ±.010
   [.XXX ±.10] [.XX ±.25]
   FRACTIONS: X/Y ±.010 [.25] ANGLES: ± 1°

★ CRITICAL DIMENSIONS

PART NO. KV-59-04

REVISIONS	
ISSUE	CHANGES
9	CN 37290 C REDRAWN PG 03/21/97
10	CN 38577 E TML 05/30/02
M	ER9130 DRK 06/20/08

CUSTOMER SALES DRAWING

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF:

PLUG, MHV

DRAWN JEP	DATE 06-07-83
DESIGN MJB	DATE 06-07-83
APPR.	DATE

KINGS by WINCHESTER ELECTRONICS — Winchester Electronics, 63 Barnes Industrial Road North, Wallingford, CT 06492 — SIZE B

SDKV-59-04

MAY 2007 THIS DRAWING BECAME THE PROPERTY OF PROPERTY OF
WINCHESTER ELECTRONICS CORPORATION, WALLINGFORD, CT 06492