HUBBELL
Entertainment Industry Products

Wiring Devices That Deliver High Performance So the Show Can Go On!

HUBBELL®
Wiring Device-Kellems

Downloaded from Arrow.com.

Hubbell Wiring Device-Kellems
Entertainment Industry Products

At Hubbell, We're Never Satisfied, But Our Customers Always Are.

Hubbell Wiring Device-Kellems products have long set the standard for innovation, performance, durability, safety and convenience. But, there's an underlying secret to our continuing success. It's our philosophy of never leaving well enough alone. We believe we can always make our products better – and the record shows we have.

The dynamic environments the Entertainment Industry faces are unpredictable and therefore place high demands on all your equipment. Hubbell devices have the proven reliability to deliver secure connections that let you turn your attention to the critical details for a flawless show, no matter what the venue. We offer tailored products to the entertainment industry such as all black plugs and connectors that blend into the background, single pole devices with a double cam that stand up to repeated mating, angle plugs from 15 to 60 amps that fit into the tight spaces where cable management becomes a more critical issue, and the overall quality that can take on the harsh everyday abuse unique to producing a show. Safety is always a top priority, all Hubbell products are designed and manufactured with this in mind and exceed UL standards so the show can go on.

Since our company was founded more than 115 years ago, Hubbell Wiring Devices has become the standard in the industry. We pride ourselves with the quality and the detail built into every product we make.

We've put this brochure together so you can easily find in one place, all of the Hubbell devices that our experience tells us the Entertainment Industry needs to keep quality high and downtime low.

Hubbell Advantage

Hubbell First - Indicates a product that is the first in the industry to meet a new standard or solve key application needs.

Labor Savings - Indicates a unique feature that greatly simplifies assembly or reduces installation time.

Tips and Application Solutions - Describes ways to use Hubbell products to address demanding applications.

HUBBELL ADVANTAGE

Downloaded from Arrow.com.

Entertainment Industry Products
Table of Contents

		Page
Straight Blade	Plugs, Connectors, Receptacles and Inlets	**2**
Twist-Lock®	Plugs, Connectors, Receptacles, Inlets, Outlets and Midget Twist-Lock	**3**
Single Pole	Plugs, Receptacles, Caps, Tri-Tap, "T"s and Snap Back Covers	**4, 5**
Pin & Sleeve	Plugs, Receptacles, Connectors, Inlets, Back Boxes, Low Profile and Short Pin & Sleeve	**6, 7**
Modular Cable Protection Systems	TrukTrak®, TredTrak® and AccessTrak® Systems	**8**
Lock-Out Tag-Out	PLUGOUT® and SWITCHOUT® Devices	**9**
Ground Fault Circuit Interrupter Devices	Automatic and Manual Set Line Cords, Portable Multiple Outlets and GFCI Modules	**10**
30 Amp Ground Fault Devices	Hard Wired and Portable GFCI	**11**
Electric Cord and Cable Reels	Weatherproof Cable and Static Discharge Reels	**12**
Portable Outlet Boxes and Plates	Boxes with Cord Strain Relief, Blank, Single and Duplex Plates	**13**
Spider® II	50 Amp and 60 Amp Temporary Power Distribution Systems	**13**
HI-Impact™ Industrial Ethernet	Connectors, Patch Cords, Plugs, Wall Plates and Accessories	**14**
Voice, Data and Video	Jacks, Multimedia Connectors, Plates, Frames and Modules	**15**
Convention Center Floor Box	Floor Box with Provisions for Power, Datacom, Water and Compressed Air	**16, 17**

Downloaded from Arrow.com.

Entertainment Industry Products
Straight Blade

Hubbell Insulgrip plugs and connectors continue our long-standing tradition of leadership as well as innovative design. The tough nylon body provides impact and chemical resistance commonly needed in the Entertainment Industry. The durable and powerful offsetting cord grip clamps on individual conductors and outer cord jackets prevent strain on the terminals. It's these and many other features that set Hubbell performance above all others.

Insulgrip Heavy Duty Plugs

2 Pole, 3 Wire Grounding
15 and 20 Amp, 125 Volts

Description	Cord Dia.	Catalog Numbers (NEMA 5–15P, 15A 125V, 0.5 HP)	Catalog Numbers (NEMA 5–20P, 20A 125V, 1 HP)
Black and white nylon.	.230"-.720" (5.8-18.3)	**HBL5266C™**	**HBL5366C™**
All black nylon.	.230"-.720" (5.8-18.3)	**HBL5266CM2**	**HBL5366CM2**
Corrosion resistant yellow nylon.	.230"-.720" (5.8-18.3)	**HBL52CM66C**	**HBL53CM66C**
8-position angle plug, black & white nylon.	.325"-.655" (8.3-16.6)	**HBL5266CA**	**HBL5366CA**
8-position angle plug, transparent enclosure.	.325"-.655" (8.3-16.6)	**HBL5266CAT**	–
Anchor lock, black and white nylon.*	.230"-.720" (5.8-18.3)	**HBL5280C**	–
Anchor lock, corrosion resistant yellow nylon.*	.230"-.720" (5.8-18.3)	**HBL52CM80C**	–
Finger grip, black neoprene, combination screws. CSA only.	.312"-.468" (7.9-11.9)	**HBL5921**	–
Fusible, black vinyl housing, slotted screws. CSA only.	.296"-.625" (7.5-15.9)	**HBL5299**	–

* UL Component



HBL5266C



HBL5280C



HBL5266A

Insulgrip Heavy Duty Connector Bodies

2 Pole, 3 Wire Grounding
15 and 20 Amp, 125 Volts

Description	Cord Dia.	Catalog Numbers (NEMA 5–15R, 15A 125V)	Catalog Numbers (NEMA 5–20R, 20A 125V)
Black and white nylon.	.230"-.720" (5.8-18.3)	**HBL5269C™**	**HBL5369C™**
All black nylon.	.230"-.720" (5.8-18.3)	**HBL5269CM2**	**HBL5369CM2**
Corrosion resistant yellow nylon.	.230"-.720" (5.8-18.3)	**HBL52CM69C**	**HBL53CM69C**

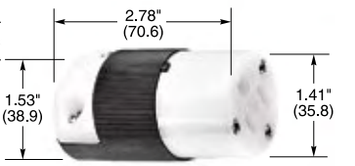

HBL5269C

Heavy Duty, Specification Grade Duplex Receptacles

Description	Color	Catalog Numbers (NEMA 5–15R, 15A 125V, 0.5 HP)	Catalog Numbers (NEMA 5–20R, 20A 125V, 1HP)
Flush, nylon face, back and side wired, multiple drive screws.	Brown	**HBL5262**	**HBL5362**
	Ivory	**HBL5262I**	**HBL5362I**
	Gray	**HBL5262GY**	**HBL5362GY**
	Red	**HBL5262R**	**HBL5362R**
	White	**HBL5262W**	**HBL5362W**
	Black	**HBL5262BK**	**HBL5362BK**
Corrosion resistant.	Yellow	**HBL52CM62**	**HBL53CM62**
	Ivory	**HBL52CM62I**	–
On 4" (101.6) round cover.	Brown	**HBL5282**	–
Isolated ground.	Orange	**IG5262**	**IG5362**
	Ivory	**IG5262I**	**IG5362I**
	Gray	**IG5262GY**	**IG5362GY**
	White	–	**IG5362W**
	Red	**IG5262R**	**IG5362R**



HBL5262

Flanged Inlets and Receptacles

Description	Flanged Inlet Catalog Numbers (NEMA 5–15R, 15A 125V)	Flanged Inlet Catalog Numbers (NEMA 5–20R, 20A 125V)	Flanged Receptacle Catalog Numbers (NEMA 5–15R, 15A 125V)	Flanged Receptacle Catalog Numbers (NEMA 5–20R, 20A 125V)
Nylon casing, back wired.	**HBL5278C**	**HBL5378C**	**HBL5279C**	**HBL5379C**
Weatherproof, gray nylon, w/lift cover & boot, multiple drive screws.	**HBL61CM64**	–	**HBL61CM65**	–



HBL5278C

Dimensions in Inches (mm)

Downloaded from Arrow.com.

Entertainment Industry Products
Twist-Lock®

Since 1929, when Harvey Hubbell obtained the first patents on Twist-Lock® devices and introduced them to the market, they have been the standard for the Entertainment Industry. Today, Hubbell Insulgrip Twist-Lock Devices continue to set the standard against which all quality industrial wiring devices are measured. The Insulgrip® line includes plugs, connectors, flanged inlets and outlets and flush mounting receptacles. With a single piece dust shield, tough nylon housing, visible identification and a roomy wiring chamber, these devices offer the most powerful cord grip in the industry.

The unparalleled acceptance and success of the Twist-Lock line is a tribute to the quality of this long lasting design. When selecting premium plugs and connectors for the Entertainment Industry, the decision is Hubbell.

NEW! All Black Devices!

Twist-Lock Devices Selection Chart
NEMA Grounding Twist-Lock

Poles	Wires	Amps	Volts		NEMA Code No.	AC HP Rating†	Plug Insulgrip		Connector Body Nylon		Inlet Nylon	Outlet Single	Receptacles Single	Receptacles IG Single
2	3	15	125		L5-15	0.5	**HBL4720C**	**HBL4720CBK**	**HBL4729C**	**HBL4729CBK**	**HBL4716C**	**HBL4715C**	**HBL4710**	**IG4710**
			250		L6-15	1.5	**HBL4570C**		**HBL4579C**		**HBL4586C**	**HBL4585C**	**HBL4560**	**IG4560**
			277AC		L7-15	2	**HBL4770C**		**HBL4779C**		**HBL4786C**	**HBL4785C**	**HBL4760**	
		20	125		L5-20	1	**HBL2311**	**HBL2311BK**	**HBL2313**	**HBL2313BK**	**HBL2315**	**HBL2316**	**HBL2310**	**IG2310**
			250		L6-20	2	**HBL2321**	**HBL2321BK**	**HBL2323**	**HBL2323BK**	**HBL2325**	**HBL2326**	**HBL2320**	**IG2320**
			277AC		L7-20	2	**HBL2331**		**HBL2333**		**HBL2335**	**HBL2336**	**HBL2330**	
			480AC		L8-20	3	**HBL2341**		**HBL2343**		**HBL2345**	**HBL2346**	**HBL2340**	**IG2340**
			600AC		L9-20		**HBL2351**		**HBL2353**		**HBL2355**	**HBL2356**	**HBL2350**	
		30	125		L5-30	2	**HBL2611**	**HBL2611BK**	**HBL2613**	**HBL2613BK**	**HBL2615**	**HBL2616**	**HBL2610**	**IG2610**
			250		L6-30	2	**HBL2621**	**HBL2621BK**	**HBL2623**	**HBL2623BK**	**HBL2625**	**HBL2626**	**HBL2620**	**IG2620**
			277AC		L7-30	3	**HBL2631**		**HBL2633**		**HBL2635**	**HBL2636**	**HBL2630**	
			480AC		L8-30	5	**HBL2641**		**HBL2643**		**HBL2645**	**HBL2646**	**HBL2640**	
			600AC		L9-30		**HBL2651**		**HBL2653**		**HBL2655**	**HBL2656**	**HBL2650**	
3	4	20	125/250		L14-20	2 (1)	**HBL2411**	**HBL2411BK**	**HBL2413**	**HBL2413BK**	**HBL2415**	**HBL2416**	**HBL2410**	**IG2410**
			3Ø250AC		L15-20	3	**HBL2421**		**HBL2423**		**HBL2425**	**HBL2426**	**HBL2420**	**IG2420**
			3Ø480AC		L16-20	5	**HBL2431**		**HBL2433**		**HBL2435**	**HBL2436**	**HBL2430**	
		30	125/250		L14-30	2	**HBL2711**	**HBL2711BK**	**HBL2713**	**HBL2713BK**	**HBL2715**	**HBL2716**	**HBL2710**	**IG2710**
			3Ø250AC		L15-30	3	**HBL2721**		**HBL2723**		**HBL2725**	**HBL2726**	**HBL2720**	**IG2720**
			3Ø480AC		L16-30	10	**HBL2731**		**HBL2733**		**HBL2735**	**HBL2736**	**HBL2730**	
			3Ø600AC		L17-30		**HBL2741**		**HBL2743**		**HBL2745**	**HBL2746**	**HBL2740**	
4	5	20	3ØY120/208AC		L21-20	2	**HBL2511**	**HBL2511BK**	**HBL2513**	**HBL2513BK**	**HBL2515**	**HBL2516**	**HBL2510**	**IG2510**
			3ØY277/480AC		L22-20	5	**HBL2521**		**HBL2523**		**HBL2525**	**HBL2526**	**HBL2520**	
			3ØY347/600AC		L23-20		**HBL2531**		**HBL2533**		**HBL2535**	**HBL2536**	**HBL2530**	
		30	3ØY120/208AC		L21-30	3	**HBL2811**	**HBL2811BK**	**HBL2813**	**HBL2813BK**	**HBL2815**	**HBL2816**	**HBL2810**	**IG2810**
			3ØY277/480AC		L22-30	10	**HBL2821**		**HBL2823**		**HBL2825**	**HBL2826**	**HBL2820**	
			3ØY347/600AC		L23-30		**HBL2831**		**HBL2833**		**HBL2835**	**HBL2836**	**HBL2830**	

Flat Cable Cord Clamp Devices

4	5	20	3ØY120/208AC		L21-20	2	**HBL2511FC**		**HBL2513FC**
		30	3ØY120/208AC		L21-30	3	**HBL2811FC**		**HBL2813FC**

Midget Twist-Lock

Poles	Wires	Amps	Volts	NEMA Code No.	Plug	Plug Insulation Displacement	Connector	Connector Insulation Displacement	Nylon Inlet	Stainless Steel Inlet	Nylon Outlet	Stainless Steel Outlet
												
2	2	15	125	ML-1	**HBL7465V**		**HBL7464V**			**HBL7467**		**HBL7468**
2	3	15	125	ML-2	**HBL7494**	**HBL7494V**	**HBL7593**	**HBL7593V**	**HBL7595N**	**HBL7595**	**HBL7596N**	**HBL7596**
3	3	15	125/250	ML-3	**HBL7485**	**HBL7485V**	**HBL7484**	**HBL7484V**	**HBL7486N**	**HBL7486**	**HBL7487N**	**HBL7487**

†The Horsepower Ratings are the Phase Values. The Values in Parentheses are Phase to Neutral.
Note: Horsepower Ratings are Applicable to Plugs and Receptacles Only and Do Not Apply to Connectors, Flanged Inlets and Outlets.

HUBBELL ADVANTAGE

Downloaded from Arrow.com.

Entertainment Industry Products
Single Pole

Hubbell's new Single Pole connectors are made from a specially formulated thermoset rubber that resists cracking in cold, hot or oily conditions as well as any other harmful environments that may be found within the Entertainment Industry. The connectors have been designed so they are easy to assemble, requiring no special tools. A high strength, non-conductive retaining screw will securely lock the contacts to the insulated sleeves. These Single Pole connectors are completely interchangeable with other manufacturers single pole products. The product is UL Enclosure Type 3R, 4X and 12K Rated.

Plugs

Amp	Color	Cable Size	Male Plug	Female Plug
300	Black	#4 - 2/0	**HBL300MBK**	**HBL300FBK**
300	White	#4 - 2/0	**HBL300MW**	**HBL300FW**
300	Red	#4 - 2/0	**HBL300MR**	**HBL300FR**
300	Blue	#4 - 2/0	**HBL300MBL**	**HBL300FBL**
300	Green	#4 - 2/0	**HBL300MGN**	**HBL300FGN**
300	Yellow	#4 - 2/0	**HBL300MY**	**HBL300FY**
300	Orange	#4 - 2/0	**HBL300MO**	**HBL300FO**
300	Brown	#4 - 2/0	**HBL300MBN**	**HBL300FBN**
400	Black	2/0 - 4/0	**HBL400MBK**	**HBL400FBK**
400	White	2/0 - 4/0	**HBL400MW**	**HBL400FW**
400	Red	2/0 - 4/0	**HBL400MR**	**HBL400FR**
400	Blue	2/0 - 4/0	**HBL400MBL**	**HBL400FBL**
400	Green	2/0 - 4/0	**HBL400MGN**	**HBL400FGN**
400	Yellow	2/0 - 4/0	**HBL400MY**	**HBL400FY**
400	Orange	2/0 - 4/0	**HBL400MO**	**HBL400FO**
400	Brown	2/0 - 4/0	**HBL400MBN**	**HBL400FBN**

HBL400MBK

HBL400FBK

Panel Mount Receptacles; Stud Type

Amp	Color	Male Plug	Female Plug
400	Black	**HBLMRSBK**	**HBLFRSBK**
400	White	**HBLMRSW**	**HBLFRSW**
400	Red	**HBLMRSR**	**HBLFRSR**
400	Blue	**HBLMRSBL**	**HBLFRSBL**
400	Green	**HBLMRSGN**	**HBLFRSGN**
400	Yellow	**HBLMRSY**	**HBLFRSY**
400	Orange	**HBLMRSO**	**HBLFRSO**
400	Brown	**HBLMRSBN**	**HBLFRSBN**

HBLMRSR

HBLFRSBL

Panel Mount Receptacles; Double Set Screw

Amp	Color	Cable Size	Male Plug	Female Plug
400	Black	#4 - 4/0	**HBLMRBK**	**HBLFRBK**
400	White	#4 - 4/0	**HBLMRW**	**HBLFRW**
400	Red	#4 - 4/0	**HBLMRR**	**HBLFRR**
400	Blue	#4 - 4/0	**HBLMRBL**	**HBLFRBL**
400	Green	#4 - 4/0	**HBLMRGN**	**HBLFRGN**
400	Yellow	#4 - 4/0	**HBLMRY**	**HBLFRY**
400	Orange	#4 - 4/0	**HBLMRO**	**HBLFRO**
400	Brown	#4 - 4/0	**HBLMRBN**	**HBLFRBN**

HBLMRBK

HBLFRO

Protective Caps

Color	Fits Male Devices	Fits Female Devices
Black	**HBLMCAPBK**	**HBLFCAPBK**
White	**HBLMCAPW**	**HBLFCAPW**
Red	**HBLMCAPR**	**HBLFCAPR**
Blue	**HBLMCAPBL**	**HBLFCAPBL**
Green	**HBLMCAPGN**	**HBLFCAPGN**
Yellow	**HBLMCAPY**	**HBLFCAPY**
Orange	**HBLMCAPO**	**HBLFCAPO**
Brown	**HBLMCAPBN**	**HBLFCAPB**N

HBLFCAPBK

HBLMCAPBK

Downloaded from Arrow.com.

Entertainment Industry Products
Single Pole

NEW! for 2005!

Tapping and Paralleling "T"

Color	Tapping "T" (Female-Female-Male) Catalog Numbers	Paralleling "T" (Female-Male-Male) Catalog Numbers
Black	**HBLTBK**	**HBLPTBK**
White	**HBLTW**	**HBLPTW**
Red	**HBLTR**	**HBLPTR**
Blue	**HBLTBL**	**HBLPTBL**
Green	**HBLTGN**	**HBLPTGN**
Yellow	**HBLTY**	**HBLPTY**
Orange	**HBLTO**	**HBLPTO**
Brown	**HBLTBN**	**HBLPTBN**

HBLTBN

HBLPTY

Tri-Tap

Color	Male-Female-Female-Female Catalog Numbers	Female-Male-Male-Male Catalog Numbers
Black	**HBLM3FBK**	**HBLF3MBK**
White	**HBLM3FW**	**HBLF3MW**
Red	**HBLM3FR**	**HBLF3MR**
Blue	**HBLM3FBL**	**HBLF3MBL**
Green	**HBLM3FGN**	**HBLF3MGN**
Yellow	**HBLM3FY**	**HBLF3MY**
Orange	**HBLM3FO**	**HBLF3MO**
Brown	**HBLM3FBN**	**HBLF3MBN**

HBLM3FBK

HBLF3MR

Double Male (Male-Male)

Color	Catalog Numbers
Black	**HBLDMBK**
White	**HBLDMW**
Red	**HBLDMR**
Blue	**HBLDMBL**
Green	**HBLDMGN**
Yellow	**HBLDMY**
Orange	**HBLDMO**
Brown	**HBLDMBN**

HBLDMBL

Double Female (Female-Female)

Color	Catalog Numbers
Black	**HBLDFBK**
White	**HBLDFW**
Red	**HBLDFR**
Blue	**HBLDFBL**
Green	**HBLDFGN**
Yellow	**HBLDFY**
Orange	**HBLDFO**
Brown	**HBLDFBN**

HBLDFBK

Snap Back Cover

Color	Catalog Numbers
Black	**HBLSCBK**
White	**HBLSCW**
Red	**HBLSCR**
Blue	**HBLSCBL**
Green	**HBLSCGN**
Yellow	**HBLSCY**
Orange	**HBLSCO**
Brown	**HBLSCBN**

HBLSCW

HUBBELL
Wiring Device-Kellems
Wiring Device-Kellems

Downloaded from Arrow.com.

Entertainment Industry Products
Pin & Sleeve

Go ahead and dish it out. Immerse it in water, grind it with dirt or put it to the test on the longest cable runs. Run over it, bake it or freeze it. Hubbell Pin & Sleeve is designed and built for the most demanding Entertainment Industry applications. All of these Pin & Sleeve devices are designed to be safe, easy to use and reliable in any environment. These UL Listed and CSA Certified devices will interface with any Pin & Sleeve meeting International Standard IEC 60309-1 and IEC 60309-2.

IP67					Watertight Devices				Back Boxes			
		Configuration									Replacement Interior Kits	
Amps	Poles and Wires	Recep./ Conn.	Plug/ Inlet	Voltage	Receptacle	Plug	Connector	Inlet	Nonmetallic	Metallic	Conn. Recep.	Plugs Inlets
16	2P 3W			100–130	HBL316R4W	HBL316P4W	HBL316C4W	HBL316B4W†	BB2030N	BB201W BB301W	IN320BF	IN320BM
	2P 3W			220–240	HBL316R6W	HBL316P6W	HBL316C6W	HBL316B6W	BB2030N	BB201W BB301W	IN320BF	IN320BM
	3P 4W			380–415	HBL416R6W	HBL416P6W	HBL416C6W	HBL416B6W†	BB2030N	BB201W BB301W	IN420DF	IN420DM
	4P 5W			220/380 240/415	HBL516R6W	HBL516P6W	HBL516C6W	HBL516B6W	BB2030N	BB201W BB301W	IN520EF†	IN520EM
20	2P 3W			125	HBL320R4W	HBL320P4W	HBL320C4W	HBL320B4W	BB2030N	BB201W BB301W	IN320AF	IN320AM
	2P 3W			250	HBL320R6W	HBL320P6W	HBL320C6W	HBL320B6W	BB2030N	BB201W BB301W	IN320BF	IN320BM
	2P 3W			480	HBL320R7W	HBL320P7W	HBL320C7W	HBL320B7W	BB2030N	BB201W BB301W	IN320BF	IN320BM
	3P 4W			125/250	HBL420R12W	HBL420P12W	HBL420C12W	HBL420B12W	BB2030N	BB201W BB301W	IN420CF	IN420CM
	3P 4W			3Ø250	HBL420R9W	HBL420P9W	HBL420C9W	HBL420B9W	BB2030N	BB201W BB301W	IN420DF	IN420DM
	3P 4W			3Ø480	HBL420R7W	HBL420P7W	HBL420C7W	HBL420B7W	BB2030N	BB201W BB301W	IN420DF	IN420DM
	3P 4W			3Ø600	HBL420R5W	HBL420P5W	HBL420C5W	HBL420B5W	BB2030N	BB201W BB301W	IN420DF	IN420DM
	4P 5W			3ØY120/208	HBL520R9W	HBL520P9W	HBL520C9W	HBL520B9W	BB2030N	BB201W BB301W	IN520EF†	IN520EM
	4P 5W			3ØY277/480	HBL520R7W	HBL520P7W	HBL520C7W	HBL520B7W	BB2030N	BB201W BB301W	IN520EF†	IN520EM
	4P 5W			3ØY347/600	HBL520R5W	HBL520P5W	HBL520C5W	HBL520B5W	BB2030N	BB201W BB301W	IN520EF†	IN520EM
30	2P 3W			125	HBL330R4W	HBL330P4W	HBL330C4W	HBL330B4W	BB2030N	BB201W BB301W	IN330AF	IN330AM
	2P 3W			250	HBL330R6W	HBL330P6W	HBL330C6W	HBL330B6W	BB2030N	BB201W BB301W	IN330BF	IN330BM
	2P 3W			480	HBL330R7W	HBL330P7W	HBL330C7W	HBL330B7W	BB2030N	BB201W BB301W	IN330BF	IN330BM
	3P 4W			125/250	HBL430R12W	HBL430P12W	HBL430C12W	HBL430B12W	BB2030N	BB201W BB301W	IN430CF	IN430CM
	3P 4W			3Ø250	HBL430R9W	HBL430P9W	HBL430C9W	HBL430B9W	BB2030N	BB201W BB301W	IN430DF	IN430DM
	3P 4W			3Ø480	HBL430R7W	HBL430P7W	HBL430C7W	HBL430B7W	BB2030N	BB201W BB301W	IN430DF	IN430DM
	3P 4W			3Ø600	HBL430R5W	HBL430P5W	HBL430C5W	HBL430B5W	BB2030N	BB201W BB301W	IN430DF	IN430DM
	4P 5W			3ØY120/208	HBL530R9W	HBL530P9W	HBL530C9W	HBL530B9W	BB2030N	BB201W BB301W	IN530EF	IN530EM
	4P 5W			3ØY277/480	HBL530R7W	HBL530P7W	HBL530C7W	HBL530B7W	BB2030N	BB201W BB301W	IN530EF	IN530EM
	4P 5W			3ØY347/600	HBL530R5W	HBL530P5W	HBL530C5W	HBL530B5W	BB2030N	BB201W BB301W	IN530EF	IN530EM
32	2P 3W			100–130	HBL332R4W†	HBL332P4W†	HBL332C4W†	HBL332B4W†	BB2030N	BB201W BB301W	IN330BF	IN330BM
	2P 3W			220–240	HBL332R6W	HBL332P6W	HBL332C6W	HBL332B6W	BB2030N	BB201W BB301W	IN330BF	IN330BM
	3P 4W			380–415	HBL432R6W	HBL432P6W	HBL432C6W	HBL432B6W	BB2030N	BB201W BB301W	IN430DF	IN430DM
	3P 4W			380V 50Hz 440V 60Hz	HBL432R3W	HBL432P3W	HBL432C3W	–	BB2030N	BB201W BB301W	IN430DF	IN430DM
	4P 5W			240/415 220/380	HBL532R6W	HBL532P6W	HBL532C6W	HBL532B6W	BB2030N	BB201W BB301W	IN530EF	IN530EM

† Consult factory.

Downloaded from Arrow.com.

Entertainment Industry Products
Pin & Sleeve

Watertight Devices IP67

Amps	Poles and Recep./ Wires	Configuration Plug/ Conn.	Inlet	Voltage	Watertight Devices: Receptacle	Plug	Connector	Inlet	Back Boxes: Nonmetallic	Metallic	Replacement Interior Kits: Conn. Recep.	Plugs Inlets
60	2P 3W			125	HBL360R4W	HBL360P4W	HBL360C4W	HBL360B4W	BB60N	BB601W BB602W	IN360AF	IN360AM
	2P 3W			250	HBL360R6W	HBL360P6W	HBL360C6W	HBL360B6W	BB60N	BB601W B602W	IN360BF	N360BM†
	2P 3W			480	HBL360R7W	HBL360P7W	HBL360C7W	HBL360B7W	BB60N	BB601W BB602W	IN360BF	N360BM†
	3P 4W			125/250	HBL460R12W	HBL460P12W	HBL460C12W	HBL460B12W	BB60N	BB601W BB602W	IN460CF	IN460CM
	3P 4W			3Ø250	HBL460R9W	HBL460P9W	HBL460C9W	HBL460B9W	BB60N	BB601W BB602W	IN460DF	IN460DM
	3P 4W			3Ø480	HBL460R7W	HBL460P7W	HBL460C7W	HBL460B7W	BB60N	BB601W BB602W	IN460DF	IN460DM
	3P 4W			3Ø600	HBL460R5W	HBL460P5W	HBL460C5W	HBL460B5W	BB60N	BB601W BB602W	IN460DF	IN460DM
	4P 5W			3ØY120/208	HBL560R9W	HBL560P9W	HBL560C9W	HBL560B9W	BB60N	BB601W BB602W	IN560EF	N560EM†
	4P 5W			3ØY277/480	HBL560R7W	HBL560P7W	HBL560C7W	HBL560B7W	BB60N	BB601W BB602W	IN560EF	N560EM†
	4P 5W			3ØY347/600	HBL560R5W	HBL560P5W	HBL560C5W	HBL560B5W	BB60N	BB601W BB602W	IN560EF	N560EM†
63	2P 3W			220–240	HBL363R6W	HBL363P6W	HBL363C6W	HBL363B6W	BB60N	BB601W BB602W	IN360BFS	IN360BMS†
	3P 4W			380–415	HBL463R6W	HBL463P6W	HBL463C6W	HBL463B6W	BB60N	BB601W BB602W	IN460DFS	IN460DMS
	4P 5W			220/380 240/415	HBL563R6W	HBL563P6W	HBL563C6W	HBL563B6W	BB60N	BB601W BB602W	IN560EFS†	IN560EMS
100	2P 3W			125	HBL3100R4W	HBL3100P4W	HBL3100C4W	HBL3100B4W	BB100N	BB1001W BB1002W	IN3100AF	IN3100AM
	2P 3W			250	HBL3100R6W	HBL3100P6W	HBL3100C6W	HBL3100B6W	BB100N	BB1001W BB1002W	IN3100BF	IN3100BM†
	2P 3W			480	HBL3100R7W	HBL3100P7W	HBL3100C7W	HBL3100B7W	BB100N	BB1001W BB1002W	IN3100BF	IN3100BM†
	3P 4W			125/250	HBL4100R12W	HBL4100P12W	HBL4100C12W	HBL4100B12W	BB100N	BB1001W BB1002W	IN4100CF†	IN4100CM
	3P 4W			3Ø250	HBL4100R9W	HBL4100P9W	HBL4100C9W	HBL4100B9W	BB100N	BB1001W BB1002W	IN4100DF	IN4100DM
	3P 4W			3Ø480	HBL4100R7W	HBL4100P7W	HBL4100C7W	HBL4100B7W	BB100N	BB1001W BB1002W	IN4100DF	IN4100DM
	3P 4W			3Ø600	HBL4100R5W	HBL4100P5W	HBL4100C5W	HBL4100B5W	BB100N	BB1001W BB1002W	IN4100DF	IN4100DM
	4P 5W			3ØY120/208	HBL5100R9W	HBL5100P9W	HBL5100C9W	HBL5100B9W	BB100N	BB1001W BB1002W	IN5100EF	IN5100EM
	4P 5W			3ØY277/480	HBL5100R7W	HBL5100P7W	HBL5100C7W	HBL5100B7W	BB100N	BB1001W BB1002W	IN5100EF	IN5100EM
	4P 5W			3ØY347/600	HBL5100R5W	HBL5100P5W	HBL5100C5W	HBL5100B5W	BB100N	BB1001W BB1002W	IN5100EF	IN5100EM
125	2P 3W			220–240	HBL3125R6W	HBL3125P6W	HBL3125C6W	HBL3125B6W	BB100N	BB1001W BB1002W	IN3100BFS †	IN3100BMS †
	3P 4W			380–145	HBL4125R6W	HBL4125P6W	HBL4125C6W	HBL4125B6W	BB100N	BB1001W BB1002W	IN4100DFS	IN4100DMS
	4P 5W			220/380 240/415	HBL5125R6W	HBL5125P6W	HBL5125C6W	HBL5125B6W	BB100N	BB1001W BB1002W	IN5100EFS	IN5100EMS

† Consult factory.

Low Profile Devices

Amps	Poles & Wires	Configuration Recep./ Conn.	Plug/ Inlet	Voltage	Plug	Receptacle	Cord Diameter Min. Max.
20	3P 4W			3Ø250	L420P9	L420R9	.350"–.710" (8.3–15.9)
30	3P 4W			125/250	L430P12	L430R12	.390"–.775" (9.9–19.7)
	3P 4W			3Ø250	L430P9	L430R9	.390" –.775" (9.9–19.7)
60	3P 4W			3Ø250	A460P9	A460R9	.75"–1.25" (19.0– 31.8)
60	4P 5W			3ØY 120/208	A560P9	—	

Short Pin & Sleeve Plug

Amps	Configuration Poles & Wires	Recep./ Conn.	Plug/ Inlet	Voltage	Plug
100	4P 5W			3ØY 120/208	HBL5100P9WSH

Downloaded from Arrow.com.

Entertainment Industry Products
Modular Cable Protection Systems

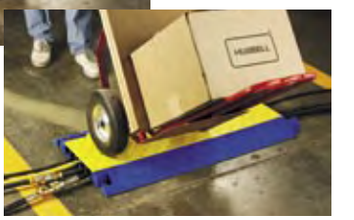

The Entertainment Industry is an ideal application for this Modular Cable Protection System. These products are designed to safeguard electrical cables and cords from vehicle and pedestrian traffic. This product line comes in three versions:

- **TredTrak® System** - comes as a 5-channel track that will protect cable diameters up to 1.28".
- **TrukTrak® System** - comes with 5 channels and will protect cables up to 3.25" in diameter.
- **AccessTrak® System** - comes with 5 channels and will protect cables up to 1.31" in diameter. Enables users to be ADAAG (American Disabilities Act Accessibility Guidelines) compliant.

TrukTrak® System

Description	Catalog Numbers	Length A	Width B	Height C	Channel Width D	Channel Height E
5-Channel blue & yellow.	**HBLTT5B**	36" (914.4)	20" (508)	2.31" (58.7)	1.25" (31.8)	1.25" (31.8)
5-Channel end caps (pair only), yellow.	**HBLTT5ECB**					
	(Female)	7.5" (190.5)	20" (508)	2.31" (58.7)	1.25" (31.8)	1.25" (31.8)
	(Male)	5.25" (133.3)	20" (508)	2.31" (58.7)	1.25" (31.8)	1.25" (31.8)
5-Channel 45° right turn blue & yellow.	**HBLTT545RB**	25" (635)	20" (508)	2.31" (58.7)	1.25" (31.8)	1.25" (31.8)
5-Channel 45° left turn blue & yellow.	**HBLTT545LB**	25" (635)	20" (508)	2.31" (58.7)	1.25" (31.8)	1.25" (31.8)
3-Channel, blue & yellow.	**HBLTT3B**	36" (914.4)	20" (508)	3.05" (77.5)	2.25" (57.2)	2.25" (57.2)
3-Channel end caps (pair only), yellow.	**HBLTT3ECB**					
	(Female)	8.25" (209.6)	20" (508)	3.05" (77.5)	2.25" (57.2)	2.25" (57.2)
	(Male)	6.38" (161.9)	20" (508)	3.05" (77.5)	2.25" (57.2)	2.25" (57.2)
2-Channel, blue & yellow.	**HBLTT2B**	36" (914.1)	22" (558.8)	4.13" (104.9)	3.25" (82.6)	3.25" (82.6)





TredTrak® System

Description	Catalog Numbers	Length A	Width B	Height C	Channel Width D	Channel Height E
5-Channel blue & yellow.	**HBLTRED5B**	36" (914.1)	17.5" (445)	1.95" (50)	1.30" (33)	1.30" (33)
5-Channel end caps (pair only), yellow.	**HBLTRED5ECB**					
	(Female)	5.5" (138)	17.5" (445)	1.95" (50)	1.30" (33)	1.30" (33)
	(Male)	5.5" (138)	17.5" (445)	1.95" (50)	1.30" (33)	1.30" (33)
5-Channel female end caps (2 females), yellow.	**HBLTRED5ECFB**	5.5" (138)	17.5" (445)	1.95" (50)	1.30" (33)	1.30" (33)
5-Channel "X" fitting, blue & yellow.	**HBLTRED5XB**	17.5" (445)	17.5" (445)	1.95" (50)	1.30" (33)	1.30" (33)
5-Channel "Y" fitting, blue & yellow.	**HBLTRED5YB**	17.5" (445)	17.5" (445)	1.95" (50)	1.30" (33)	1.30" (33)





Y-Fitting

AccessTrak® System

Description	Catalog Numbers	Length A	Width B	Height C	Channel Width D	Channel Height E
AccessTrak Kit*	**HBLAT5KIT**	41.06" (1043)	42.90" (1090)	4.00" (102)	1.34" (34)	1.31" (33)
Trough	**HBLAT5**	36.00" (914)	13.34 (339)	1.94" (49)	1.34" (34)	1.31" (33)
Trough End Rails (set)	**HBLAT5ER**	16.03" (407)	—	4.00" (102)	—	—
Ramps (set)	**HBLAT5RAMP**	36.00" (965)	—	1.94" (49)	—	—
Ramp End Rails (set)	**HBLAT5RAMPER**	—	14.75" (375)	4.00" (102)	—	—

*Consists of (1) HBLAT5, (1 set) HBLAT5ER, (1 set) HBLAT5RAMP and (2 sets) HBLAT5RAMPER



X-Fitting







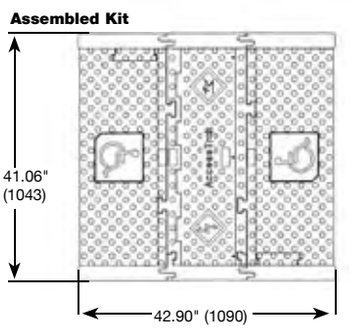

Dimensions in Inches (mm)

Downloaded from Arrow.com.

Entertainment Industry Products
Lock-Out Tag-Out

All Hubbell Wiring Device-Kellems Lock-Out products comply with OSHA Lock-Out/Tag-Out Regulation 29CFR 1910.1478. The Plug-Out product line accommodates the broadest range of plugs in the market place today from 15A convenience plugs all the way up to and including 60A Pin & Sleeve devices. Use these devices below to work safe during set-ups or breakdowns by insuring circuits are not energized.

Lockout Devices For Electrical Safety

PLUGOUT®, Keyed PLUGOUT®, and SWITCHOUT™ safety devices provide an approved method of complying with OSHA Lockout/Tagout regulation 29CFR 1910.147.

PLUGOUT Devices

Description	Typical Devices Accommodated	Catalog Numbers
Small yellow lockout device.	15 and 20A molded on plugs.	**HLDMP**
Medium yellow lockout device.	20 and 30A Twist-Lock® plugs.	**HLD**
Large yellow lockout device.	20, 30 and 60A metallic and non-metallic Pin & Sleeve, Hubbellock® & 50A Twist-Lock plugs.	**HLD2**



HLDMP

Description	Typical Devices Accommodated	Catalog Numbers
Yellow keyed PLUGOUT, keyed differently.	15 and 20A, 125V straight blade plugs with holes in blades.	**HKLD**
Yellow keyed PLUGOUT, keyed alike.	15 and 20A, 125V straight blade plugs with holes in blades.	**HKLDPK2***

*Two devices per package.

HLD

SWITCHOUT Lockout Devices

Description	Typical Devices Accommodated	Catalog Numbers
Yellow SWITCHOUT device.	Toggle switch.	**HSLDPK2***

*Two devices per package.

HLD2

Lockout Device Kit

Description	Includes	Catalog Numbers
Yellow lockout kit.	HLDMP, HSLDPK2, HLD and HLD2.	**HLDKIT**

HSLDPK2

HKLDPK2

Dimensions in Inches (mm)

Downloaded from Arrow.com.

Entertainment Industry Products
GFCI

All Hubbell GFCI products are built for quality, designed for easy installation and packaged for convenience. The portable GFCI line cords provide ground fault protection both indoors and out. They are offered with an Automatic or Manual Set feature to meet all applications in the Entertainment Industry.

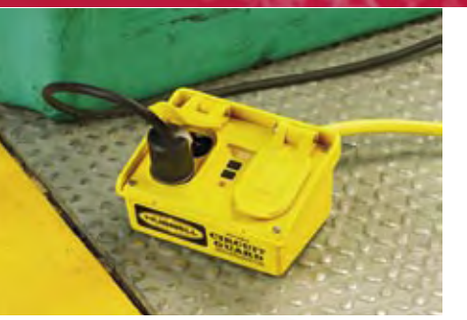

Circuit Guard® Automatic Set Portable GFCI Line Cords

Automatically energizes or sets the GFCI for use upon plug in and after the loss of primary power (power failure or unplugging the device). After a ground fault condition, unit must be reset by pushing the reset button. This feature eliminates the need for unit to be reset each time it is plugged in or powered up. Ideal for equipment intended for continuous use where a temporary power failure is likely and undesirable. Examples are pumps, pressure washers, portable signs or lighting and engine heaters.

	15A 120V AC
Description	**Catalog Numbers**
18" (45.7 cm) GFCI line cord.	**GFP4C15A**
6' (182.9 cm) GFCI line cord.	**GFP6C15A**
25' (762 cm) GFCI line cord.	**GFP25C15A**
15' (457.2 cm) GFCI power supply cord with stripped leads.	**GFPOEMA***

GFP4C15A

GFP3C20M

Circuit Guard® Manual Set Portable GFCI Line Cords

Requires the GFCI to be manually set for use by pressing the reset button upon plug in and after loss of primary power (power failure or unplugging the device). Must be manually reset after a ground fault condition. Ideal for applications where operator injury might occur if equipment were to restart after a power failure. Typical equipment includes power drills, saws, lathes and grinders.

	15A 120V AC	20A 120V AC
Description	**Catalog Numbers**	
18" (45.7 cm) GFCI line cord.	**GFP4C15M**	–
3' (91.4 cm) GFCI line cord.	–	**GFP3C20M**
6' (182.9 cm) GFCI line cord.	**GFP6C15M**	–
25' (762 cm) GFCI line cord.	**GFP25C15M**	–
15' (457.2 cm) GFCI power supply cord with stripped leads.	**GFPOEMM***	–
50' (1524 cm) GFCI power supply with Elastogrip® watertight straight blade.	**GFP50C15WM**	–
100' (3048 cm) GFCI power supply with Elastogrip watertight straight blade.	**GFP100C15WM**	–

*Total length is 15' 4.5" (468.6 cm) including leads: green 4.5" (114.3), black and white 3.5" (88.9). Each prestripped .375" (9.5).

GFPOEMM

GFP3C20MTL

Circuit Guard® Manual Set Twist-Lock® Portable GFCI Line Cords

	15A 120V AC	20A 120V AC
Description	**Catalog Numbers**	
3' (91.4 cm) GFCI line cord.	**GFP3C15MTL**	**GFP3C20MTL**

GFP15M

Multiple Outlet Portable GFCI

Description	Rating	Receptacles	Plug	Catalog Numbers
4 outlet, yellow.	15A,120V AC	2-Duplex 5-15R	NEMA 5-15P	**GFP15M**
4 outlet, yellow.	20A,120V AC	2-Duplex 5-20R	NEMA 5-20P	**GFP20M**

GFCI Module

Description	Rating	Catalog Number
GFCI module, manual set, yellow.	20A, 120V AC, 60 Hz	**GFM20**

GFM20

Dimensions in Inches (mm)

Downloaded from Arrow.com.

Entertainment Industry Products
GFCI 30A Ground Fault Products

The GFCI offering consists of 30 hard-wired units that may be either surface or panel mounted. All models are available in 120, 240, 120/240V AC, 3Ø250V AC and 3Ø120/208V AC configurations and come in either automatic or manual reset. Hard-wired units are available with or without an audible alarm and may also be ordered with either a line voltage or low voltage output signal. All portables are also 30 amp max rated and come with pigtails on both the line and the load sides so that the end-user may install any plug and connector they may choose.

HUBBELL Exclusive!

Circuit Guard Hard Wired 30A GFCI

Description	Voltage	Alarm	Manual Set	Automatic Set
Hard wired, manual set and automatic set GFCIs.	120V AC	None	**GFHW13005**	**GFHW13105**
	120V AC	Audible	**GFHW13015**	**GFHW13115**
	240V AC	None	**GFHW23005**	**GFHW23105**
	240V AC	Audible	**GFHW23015**	**GFHW23115**
	120/240V AC	Audible	**GFHW33015**	**GFHW33115**
	3Ø250V AC	Audible	**GFHW530**	**GFHW531**
	3Ø120/208V AC	Audible	**GFHW430**	**GFHW431**

Note: All units above are stock items.

Automatic Reset GFCI

Manual Reset GFCI

GFP1311

Build Your Own Catalog Number

Catalog Number Configurator:
Example: Catalog Number: GFHW23015

GF	HW	2	3	0	1	5
		Voltage	Amperage	Reset Type	Output Signal	Mounting Style
Ground **F**ault	**H**ard-**W**ired	1-120 V AC **2**- 240 V AC 3-120/240V AC 4-3Ø120/208V AC 5-3Ø250V AC	**3** - 30 Amp	**0** - Manual 1 - Automatic	0 - none **1** - Audible Alarm 2 - Line Voltage 3 - 24 Volt DC 4 - 12 Volt DC	**5** - Panel Mount/ Surface Mount

Note: 2 to 3 week lead time for all "build your own" catalog numbers.

Circuit Guard Portable 30A GFCI

Description	Cord Length	Voltage	Manual Set	Automatic Set
Portable, manual set and automatic set GFCIs.	2 Foot	120V AC	**GFP1301**	**GFP1311**
	25 Feet	120V AC	**GFP1302**	**GFP1312**
	2 Foot	240V AC	**GFP2301**	**GFP2311**
	25 Feet	240V AC	**GFP2302**	**GFP2312**
	6 Feet	120/240V AC	**GFP3305**	**GFP3315**
	6 Feet	3Ø250V AC	**GFP5305**	**GFP5315**
	6 Feet	3Ø120/208V AC	**GFP4305**	**GFP4315**

Note: All units above are stock items.

Dimensional Drawing

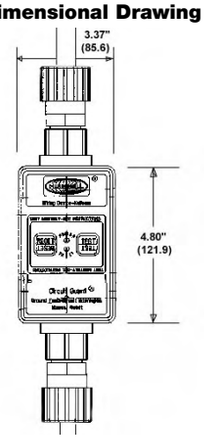

Catalog Number Configurator:
Example: Catalog Number: GFHW23015

GF	P	2	3	1	1
		Voltage	Amperage	Reset Type	Cord Length
Ground **F**ault	**P**ort-able	1-120 V AC **2**- 240 V AC 3-120/240V AC 4-3Ø120/208V AC 5-3Ø250V AC	**3** - 30 Amp	**0** - Manual 1 - Automatic	**1** - 2 Feet 2 - 25 Feet 3 - 50 Feet 4 - 100 Feet 5 - 6 Feet

Note: 2 to 3 week lead time for all "build your own" catalog numbers.

Dimensions in Inches (mm)

Downloaded from Arrow.com.

Entertainment Industry Products
Electric Cord and Cable Reels

Our cord and cable reels are an ideal addition for the Entertainment Industry. These reels will minimize unmanaged cords and cables, which can cause trip hazards or electric shock due to damaged wire insulation. They offer quick, convenient cord deployment and the reels provide a safe and effective wire management system for any location or facility.

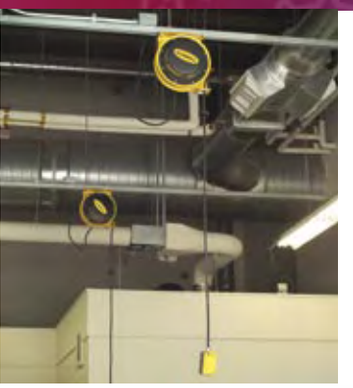

Weatherproof Cable Reels are made for the most abusive and demanding environments. These reels feature a solid steel construction, a 600V rating with SOW - A type cable and Type 4X enclosure rating. They are designed for use with 15 & 20 amp industrial products such as portable outlet boxes, Insulgrip® and Twist-Lock® devices and pendant push-button stations.

Weatherproof Cable & Static Discharge Reels

Description	Catalog Numbers	Cable Length Feet	Meters	Volts	Cable Type	Amps	Weight lbs.	kg
14" weatherproof reel.	**HBL501431W***	50	15.2	600	14/3 SOW-A	15	55	24
16" weatherproof reel.	**HBL501232W***	50	15.2	600	12/3 SOW-A	20	80	36.3
16" weatherproof reel.	**HBL501242W***	50	15.2	600	12/4 SOW-A	16	86	38.7
16" weatherproof reel.	**HBL501032W***	50	15.2	600	10/3 SOW-A	25	86	38.7
16" weatherproof reel.	**HBL501042W***	50	15.2	600	10/4 SOW-A	20	92	41.1
Static discharge reel.	**HBL50SD**	50	15.2	–	Single 3/32" Steel	–	12	5.4
Static discharge reel.	**HBL50YSD**	50†	15.2	–	Dual (Y) 3/32" Steel	–	13	5.9
14" pivot base.	**HBL14PB**	–	–	–	–	–	5	2.27
16" pivot base.	**HBL16PB**	–	–	–	–	–	13	5.9

*Notes: * All weatherproof cable reels are supplied with wire leads. †35ft./10.6m + Dual 15ft./4.5m for "Y". Power supply cable not supplied.*

Industrial Cord Reels are built to provide safe, convenient power and lighting for demanding entertainment applications and environments. The industrial reels are all steel construction, have a 300V rating with SJ cord and can be ceiling, wall or bench mounted. They are available with fluorescent or incandescent hand lamps as well as a HBL5269C connector body or portable outlet box versions.

Industrial Cord Reels

Description	Catalog Numbers	Cable Length Feet	Meters	Volts	Cable Type	Amps	Weight lbs.	kg	Watts (Max)
Reel with HBL5269C connector.	**HBL45123C**	45	13.7	125	12/3 SJEO	15	23	10.4	1875
Reel with portable outlet box.	**HBL45123R**	45	13.7	125	12/3 SJEO	15	23	10.4	1875
Reel with incandescent hand lamp.	**HBL50163IN**	50	15.2	125	16/3 SJT	0.8	21	9.5	100
Reel with fluorescent hand lamp.	**HBL50162FL**	50	15.2	120V AC	16/2 SJT	0.3	21	9.5	13
Pivot Base	**HBL340PB**	–	–	–	–	–	5	2.26	–

Note: Supplied with 5ft. power supply cord with HBL5266C, 15A straight blade plug.

Commercial Cord Reels are designed for the less demanding requirements of lighter duty environments. The commercial reels feature steel construction and have a 125V rating with SJT type cord. These reels are UL Listed and provide power and lighting for all your needs.

Commercial Cord Reels

Description	Catalog Numbers	Cable Length Feet	Meters	Volts	Cable Type	Amps	Weight lbs.	kg	Watts (Max)
Reel with fluorescent hand lamp & inline receptacle.	**HBLC25163FL**	25	7.62	120V AC	16/3 SJT	10	9	4.1	1200
Reel with fluorescent hand lamp & automatic shut off switch.	**HBLC25162AFL**	25	7.62	120V AC	16/2 SJT	0.3	8.2	3.7	13
Reel with non-metallic incandescent hand lamp & automatic shut off switch.	**HBLC25163AIN**	25	7.62	125	16/3 SJT	0.6	9	4.1	75
Reel with metallic incandescent hand lamp with receptacle & circuit breaker.	**HBLC25143IN**	25	7.62	125	14/3 SJT	13	9.5	4.3	1625
Reel with wire leads.	**HBLC25163**	25	7.62	125	16/3 SJT	10	8.5	3.9	1250
Reel with a Hubbell HBL5969VBLK connector.	**HBLC25163C**	25	7.62	125	16/3 SJT	10	8.5	3.9	1250

Note: Reels supplied with 2ft. power supply cord and molded on straight blade 15A plug.

Downloaded from Arrow.com.

Entertainment Industry Products
Portable Outlet Box and Spider® II

Portable Outlet Box

Our portable outlet boxes were designed to provide a rugged enclosure for a variety of wiring devices. Their non-metallic construction is impact-resistant, non-conductive and corrosion-resistant. The boxes are field wired and are offered in a high visibility yellow color. Not only are these boxes easy to install anywhere but they are also highly durable.

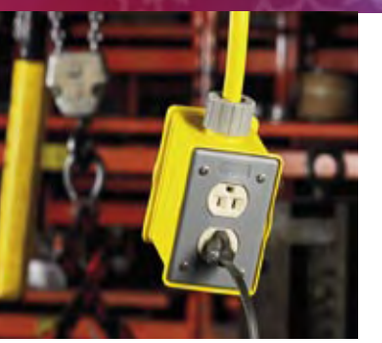

Portable Outlet Boxes and Plates

Description	Catalog Numbers
Box with cord strain relief, with one blank cover plate.	**HBLPOB1**
Box with cord strain relief, with two duplex (indoor) cover plates.	**HBLPOB1D**
Blank, non-metallic FS cover plate with foam gasket, gray.	**HBLP14FS**
Duplex, non-metallic FS cover plate, gray.	**HBLP8FS**
Single receptacle (1.39"), non-metallic FS cover plate, gray.	**HBLP7FS**
Single receptacle (1.56"), non-metallic FS cover plate, gray.	**HBLP720FS**
Rectangular opening, non-metallic FS cover plate, gray.	**HBLP26FS**

Spider® II

Hubbell's new Spider II temporary power distribution system sets a new safety and performance standard for your temporary power needs. Outdoor events, unconditional venues and modern convenience place more demands on electrical power than ever before. Hubbell's new and improved Spider box steps up to this challenge by offering advanced electrical and safety features. The Spider II box incorporates the most advanced ground fault module technology available in the industry today ensuring safe and reliable distribution of electrical power. With the constant need for temporary power applications, this is one product the Entertainment Industry should not be without.

Spider® II Boxes

Rating	Type	Qty	Receptacle Ratings	Receptacle Components	Protection Overload	Protection GFCI	Catalog Numbers
50A, 120/240V AC (max.)	Straight Blade	6	20A, 125V	HBL53R61	Yes	Yes	**SBSB1**
	Twist-Lock®	1	30A, 250V	HBL2620SW	Yes	No	
	Twist-Lock (Inlet)	1	50A, 125/250V	HBL6375S	No	No	
	Twist-Lock (Outlet)	1	50A, 125/250V	CS6369	No	No	
50A, 120/240V AC (max.)	Straight Blade	6	20A, 125V	HBL53R61	Yes	Yes	**SBSB2**
	Twist-Lock	1	30A, 250V	HBL2620SW	Yes	Yes	
	Twist-Lock (Inlet)	1	50A, 125/250V	HBL6375S	No	No	
	Twist-Lock (Outlet)	1	50A, 125/250V	CS6369	No	No	
50A, 120/240V AC (max.)	Twist-Lock	6	20A, 125V	HBL2310SW	Yes	Yes	**SBTL1**
	Twist-Lock	1	30A, 250V	HBL2620SW	Yes	No	
	Twist-Lock (Inlet)	1	50A, 125/250V	HBL6375S	No	No	
	Twist-Lock (Outlet)	1	50A, 125/250V	CS6369	No	No	
50A, 120/240V AC (max.)	Twist-Lock	6	20A, 125V	HBL2310SW	Yes	Yes	**SBTL2**
	Twist-Lock	1	30A, 250V	HBL2620SW	Yes	Yes	
	Twist-Lock (Inlet)	1	50A, 125/250V	HBL6375S	No	No	
	Twist-Lock (Outlet)	1	50A, 125/250V	CS6369	No	No	
60A, 3Ø 120/208V AC (max.)	Twist-Lock	6	20A, 125V	HBL2310SW	Yes	Yes	**SCTL0**
	Pin & Sleeve (Inlet)	1	60A, 3ØY 120/208V	HBL560B9R	No	No	
	Pin & Sleeve (Outlet)	1	60A, 3ØY 120/208V	HBL560R9W	No	No	
60A, 3Ø 120/208V AC (max.)	Straight Blade	6	20A, 125V	HBL53R61	Yes	Yes	**SCSB0**
	Pin & Sleeve (Inlet)	1	60A, 3ØY 120/208V	HBL560B9R	No	No	
	Pin & Sleeve (Outlet)	1	60A, 3ØY 120/208V	HBL560R9W	No	No	

Note: 60A units are UL and cUL only.

Downloaded from Arrow.com.

Entertainment Industry Products
HI-Impact™ Ethernet

Hubbell's HI-Impact Ethernet System provides leading edge technology for Category 5e and 6-network transmission performance suitable for industrial and any other harsh environments. This system incorporates the use of our standard data connectivity jacks, which feature our keystone latching mechanism, in a rugged sealed housing that provides IP67 rated protection. This allows you to extend your LAN to include automation equipment and manufacturing or process control equipment. Utilize the Hubbell system to provide added protection within environments such as convention centers, food processing plants, medical industries, outdoor billboards, display screens or any other environment which requires added protection from moisture, corrosion, dust, debris, vibration and chemicals.

Industrial Ethernet Connectors

Type	Cat. No.
Cat 6 connector.	**HBLHI6**
Cat 5e connector.	**HBLHI5E**
Cat 5e in-line coupler.	**HBLHI5EC**
Cat 5e shielded.	**HBLHI5ESC**
M12 MicroQuick, 4-position, male.	**MBMS14314**

HBLHI6

HBLHI5E

HBLHI5EC

HBLHI5ESC

Industrial Ethernet Patch Cords and Plugs



HI-Impact to HI-Impact Connector

Type	Cat. No.
Cat 6	**HBLHI6xxEE**
Cat 5e	**HBLHI5ExxEE**
Cat 5e, shielded	**HBLHI5ESxxEE**
F-type	**HBLHIFxxEE**

HI-Impact Connector to RJ-45

Type	Cat. No.
Cat 6	**HBLHI6xxAE**
Cat 5e	**HBLHI5ExxAE**
Cat 5e, shielded	**HBLHI5ESxxAE**
F-type	**HBLHIFxxAE**

HI-Impact RJ-45 to RJ-45

Type	Cat. No.
Cat 6	**HBLHI6xxAA**
Cat 5e	**HBLHI5ExxAA**
Cat 5e, shielded	**HBLHI5ESxxAA**
F-type	**HBLHIFxxAA**

XX = Length To order replace XX Suffix with the following: 03 = 3' 05 = 5' 07 = 7' 10 = 10' 12 = 12' 15 = 15' 20 = 20' 25 = 25'

Industrial Ethernet Wall Plates and Accessories

Stainless Steel Wall Plates

Gang	Openings	Catalog No.
1	1	**HBLHISF11**
1	2	**HBLHISF12**
2	2	**HBLHISF22**
2	4	**HBLHISF24**

Thermoplastic, 4-Point FSFS, 1-Gang

Ports	Color	Catalog No.
1	Gray	**HBLHI14GY**
2	Gray	**HBLHI24GY**
1	Yellow	**HBLHI114PY**
2	Yellow	**HBLHI124PY**

Secure-IT™ Weatherproof NEMA 3R Plate

Description	Gang	Catalog No.
Secure-IT™	1	**HBLTWPF1GY**

Connector Cap

Description	Catalog No.
Connector Cap	**HBLHIC**

Downloaded from Arrow.com.

Category 6, 5e and USOC 6-Position Jacks

Category 6 Catalog No.	Category 5e Catalog No.	USOC Catalog No.
HBL6xx	**HBL5E**xx	**HBLU**xx

xx=Color; To order replace xx Suffix with the following:
BK (Black), B (Blue), EI (Electric Ivory), GY (Gray), GN (Green), R (Red), OW (Office White), OR (Orange), TI (Telco Ivory), W (White) and Y (Yellow)

HBL6GN

HBL6OR

HBL6W

Multimedia Snap In Connectors

Type	Available Colors	Catalog Numbers
Blank, 10 pack	OW, GY, I, W	**SIB**xx**PK10**
RCA 110 Punch Down, Black Housing	OW*,W*,Y*	**SIRCA**xx
RCA Gold Pass-Thru F/F Coupler Office White Housing	R*,W*,Y,* BK*	**SIRCAFF**xx
RCA Solder Coupler Termination Office White Housing	R*,W*,Y*, BK*	**SIRCAS**xx
S-Video 110, Punchbown	Black only	**SISVOW**
F-Type Coupler, Bulkhead F/F	OW, GY, I, W	**SIF**xx
BNC F/F Coupler	OW, GY, I, W	**SIBNC**xx
ST-Style Adapter, Black*	OW, GY, I, W	**SIST**xx
S-Video F/F Coupler	Black only	**SISVFFBK**
SC Simplex Adapter Office White Housing	Blue only*	**SIFSCOW**

* Insulator Colors
xx=Color; To order replace xx Suffix with the available color:
BK (Black), GY (Gray), R (Red), OW (Office white), W (White) and Y (Yellow)

SIBOWPK10 SIRCAOW

SIRCAFFR SIRCASR

SISVOW SIFOW

SIBNCOW SISTOW

SISVFFBK SIFSCOW

Outlet Frames

Style	Style Line	106 Duplex
2-port	**FCX244**xx	**DJO**xx
3-port	**FCX344**xx	—
4-port	**FCX444**xx	**DJ106**xx
6-port	**FCX644**xx	—

xx=Color; To order replace xx Suffix with the following:
BK (Black), GY (Gray), I (Ivory), OW (Office white) and W (White)

FCX244OW FCX444OW

DJOOW DJ106OW

HP Single Gang Plates

Style	Available Colors	Catalog Numbers
Rectangular	B, G, DOW, WA, I	**HPS1**xx
Duplex	B, G, DOW, W	**P8**xx*

* for Ivory do not add suffix (P8)
xx=Color; To order replace xx Suffix with the available color:
B (Black), G (Gray), I (Ivory), DOW (Office white) and W or WA (White)

HPS1DOW P8DOW

Data & Communication Rear-Loading Wall Plates

Gang	Color	Available Port Sizes	Catalog Numbers
One	Office White	1, 2, 3, 4, 6	**DP1**x**OW**
Two	Office White	6, 9, 12	**DP2**x**OW**
One	Stainless Steel	1, 2, 3, 4, 6	**DP1**x**S**
Two	Stainless Steel	4, 6, 9, 12	**DP2**x**S**

X=Port Size; To order replace X with the Port Size.

DP12OW DP14OW

DP11S DP16S

Data Modular Face Plate Frames

Color	1 Gang	2 Gang
Office White	**DF1OW**	**DF2OW**

Data Plate Modules

Blank:

Type	Port	Unit	Catalog No.
Blank	—	0.5	**DFBM05OW***
Blank	—	1	**DFBM1OW***
Blank	—	1.5	**DFBM15OW***

* Sold in packages of five.

Keystone:

Type	Port	Unit	Catalog No.
Flat	1	1	**DF1KOW**
Flat	2	1	**DF2KOW**
Angled	1	1.5	**DFA1KOW**
Angled	2	1.5	**DFA2KOW**

SC Angled:

Type	Port	Unit	Catalog No.
1 Duplex	—	1.5	**DFA1SCOW**
2 Duplex	—	2	**DFA2SCOW**

Recessed:

Type	Port	Unit	Catalog No.
Keytone,	1	1.5	**DFRA1KOW**
Angled	2	2	**DFRA2KOW**

9 & 15 Pin Gender Changer:

Type	Port	Unit	Catalog No.
9 Pin F/F, D-Stub	1	1	**DF19FFOW**
15 Pin F/F, D-Stub	1	1	**DF115FFOW**

15 Pin Terminal SVGA:

Type	Port	Unit	Catalog No.
15 Pin F/Screw D-Stub	1	1	**DF115SOW**

SC Modules

Type	Color	Catalog No.
SC Duplex Adapter Screw Mount	Blue	**SIFSC**
SC to ST-Style, Duplex Adapter Screw Mount	Blue	**SIFSCST**

Downloaded from Arrow.com.

Entertainment Industry Products
Convention Center Floor Box

NEW!

Hubbell has listened to the entertainment industry and we are now pleased to introduce the first UL Listed convention center floor box as a solution to safely deliver utilities to the exhibit floor. The floor boxes are custom manufactured with provisions for power, datacom, water and compressed air. Hubbell provides a unique solution in safely keeping power and water in separate enclosures. This is accomplished by having two boxes joined together, while maintaining separate drains and lift covers. Let Hubbell provide a custom floor box to fit your facility needs and also provide the safety that no other box can.

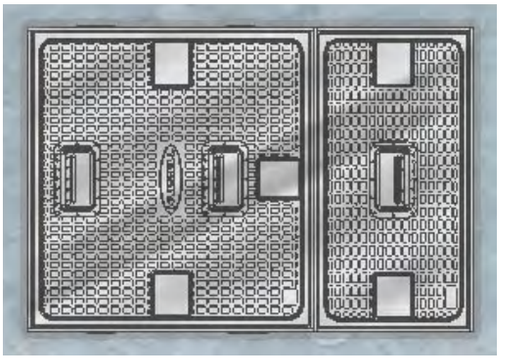

The Floor Box

A galvanized sheet steel concrete cover is provided with each box to protect the cast aluminum cover during the concrete pour.

HUBBELL Exclusive! Safety-bars are provided in each corner of the cover flange to prevent the cover from potentially falling into the box and damaging the panel components.

A steel frame provides structural support and is zinc-coated for corrosion resistance.

Conduit feeds can be easily field cut to the specified conduit size.

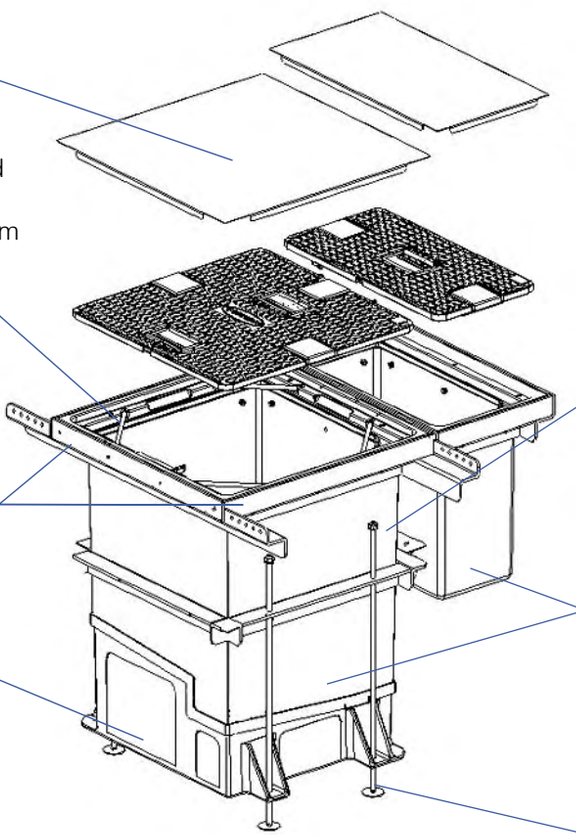

The box is constructed of polyurethane for resistance to rust and corrosion. The material meets UL94 V-0 and 5VA flammability requirements.

Power/datacom and water/ compressed air are contained in separate enclosures to provide maximum safety.

The box can be easily leveled prior to the pour by simply adjusting the extra long threaded rods.

Downloaded from Arrow.com.

Convention Center Floor Box

The Interior

Circuit breaker protection is provided for 20 and 30 Amp receptacles. Circuit breaker protection is optional for the Pin & Sleeve receptacle.

The datacom panel can be provided with a variety of devices that are protected by weatherproof covers. Customers can specify fiber optic, A/V, Category 5e jacks, or other devices for communication.

The power panel can be provided with a combination of Hubbell Pin and Sleeve, Twist-Lock® and straight blade devices.

Panels are constructed of brushed stainless steel for durability and corrosion resistance. Panels are gasketed and angled toward the drain to prevent the ingress of water.

A two-inch drain with overflow protection can be optionally plumbed.

White walls provide increased visibility in the box interior.

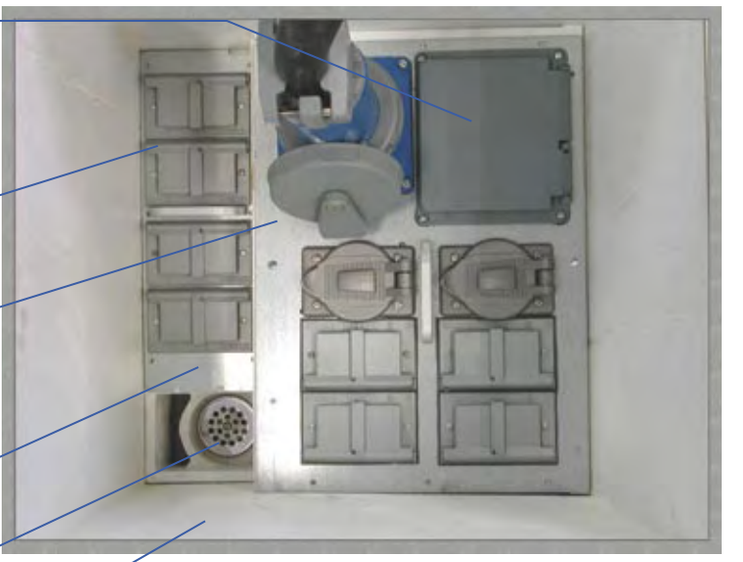

The Cover

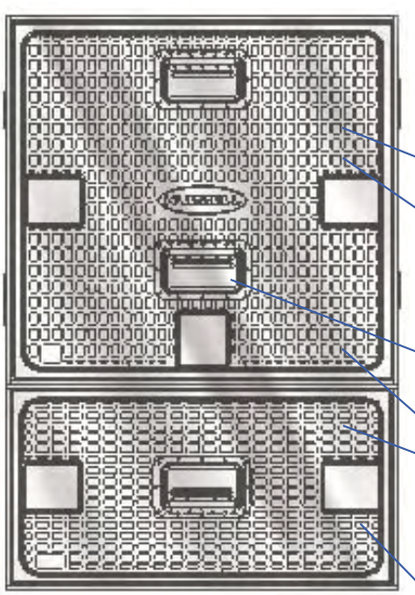

The cast aluminum cover is UL Listed, designed and tested with a 35,000 lb. load capacity. Load capacity is engraved on the cover. The gasketed cover meets UL requirements for scrubwater. The box and cover have been designed to allow a Pin & Sleeve plug/receptacle to be engaged while the cover remains closed to prevent accidents. The cover is removable for full access to the interior. The hingless design eliminates components that can be easily broken in the convention center environment.

A textured surface provides skid resistance.

Large heavy-duty handles can easily be accessed with gloved hands to remove the cover. The handles are also spring loaded to prevent potential breakage.

Power/datacom and water/compressed air are accessed through separate covers. The cover flange is constructed of cast aluminum.

Multiple drop-down cable access doors provide various cable exits for separation of power/datacom. The cable doors enable radial bends for cable management of festoon and entertainment cable. All doors incorporate friction hinges and gasketed to prevent the ingress of water.

Downloaded from Arrow.com.

HUBBELL
Entertainment Industry Products

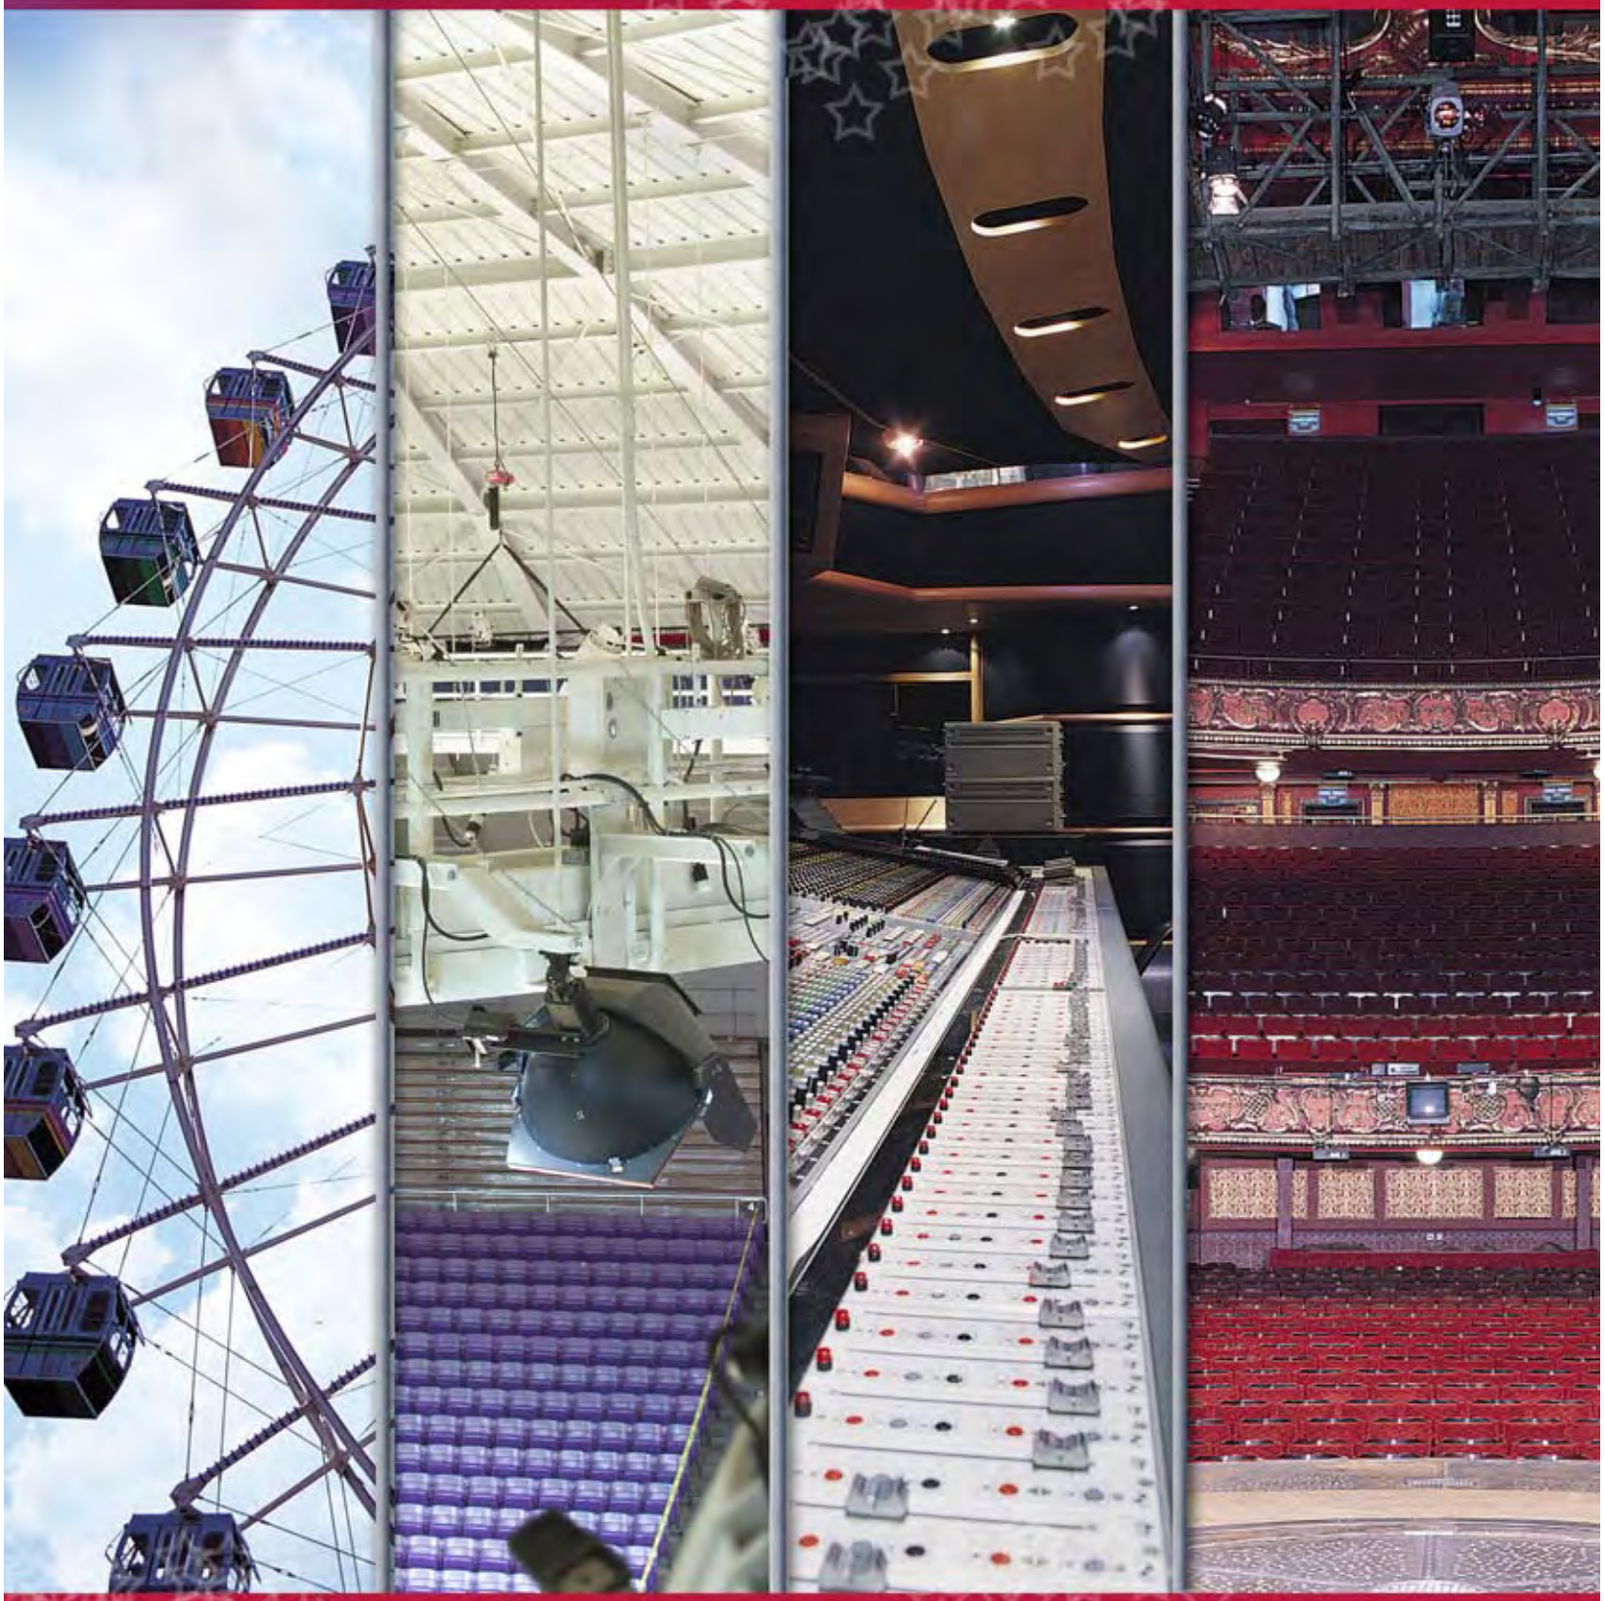

Printed In U.S.A. Specifications subject to change without notice. ® Registered trademark of Hubbell Incorporated

Hubbell Incorporated (Delaware) • 185 Plains Road • Milford, CT 06460-2420 • (203) 882-4800 • FAX (800) 255-1031

H5155

HUBBELL®

Wiring Device-Kellems

Downloaded from Arrow.com.